

Indice

1. Introduction	5
Passo 1 - Preparing the upgrade kit	6
Passo 2 - Tools Required	6
Passo 3 - Unloading the filament	7
Passo 4 - Moving the Z-axis	7
Passo 5 - Unplugging the printer	8
2. Printer disassembly	9
Passo 1 - Tools	10
Passo 2 - Rimuovere il pannello dello sportello	11
Passo 3 - Rimuovere il pannello superiore	12
Passo 4 - Removing the left side cover	12
Passo 5 - Removing the left metal panel	13
Passo 6 - Removing the right side cover	13
Passo 7 - Removing the right handle	14
Passo 8 - Removing the right side panel	14
Passo 9 - Detaching the Bowden-guide	15
Passo 10 - Uncovering the cables	15
Passo 11 - Uncovering the xBuddy electronics	16
Passo 12 - Disconnecting the motor cables	16
Passo 13 - Unplugging the PTFE tube	17
Passo 14 - Disconnecting the Nextruder cables - left side	17
Passo 15 - Disconnecting the Nextruder cables - right side	18
Passo 16 - Removing the Cable-clip	18
Passo 17 - Detaching the heatsink fan	19
Passo 18 - Removing the Nextruder assembly	19
Passo 19 - Rimuovere il convogliatore ventola	20
Passo 20 - Removing the LoveBoard assembly	20
Passo 21 - Chapter completed	21
3. Belts upgrade	22
Passo 1 - Tools	23
Passo 2 - Loosening the belts	23
Passo 3 - Unlocking the belts	24
Passo 4 - Removing the belts	24
Passo 5 - Releasing the left motor	25
Passo 6 - Releasing the right motor	25
Passo 7 - Disassembling the right motor	26
Passo 8 - New pulley: parts preparation (right motor)	26
Passo 9 - Installing the new pulley (right motor)	27
Passo 10 - Inserting the lower belt (right motor)	27
Passo 11 - Securing the lower belt (right motor)	28
Passo 12 - Guiding the lower belt (right motor)	28
Passo 13 - Guiding the upper belt (right motor)	29
Passo 14 - Securing the motor cable (right motor)	29
Passo 15 - Fixing the right motor	30
Passo 16 - Right motor screws: parts preparation	30
Passo 17 - Tightening the right motor	31
Passo 18 - Securing the Bowden-guide	31
Passo 19 - Disassembling the left motor	32
Passo 20 - New pulley: parts preparation (left motor)	32
Passo 21 - Belt routing overview	33

Passo 22 - Installing the new pulley (left motor)	33
Passo 23 - Guiding the lower belt (left motor)	34
Passo 24 - Inserting the upper belt (left motor)	34
Passo 25 - Securing the upper belt (left motor)	35
Passo 26 - Guiding the upper belt (left motor)	35
Passo 27 - Securing the motor cable (left motor)	36
Passo 28 - Fixing the left motor	36
Passo 29 - Belt tensioner pulleys: parts preparation	37
Passo 30 - Tightening the left motor	37
Passo 31 - Guiding the upper belt (left side)	38
Passo 32 - Attaching the left belt tensioner	38
Passo 33 - Guiding the upper belt (gantry - left)	39
Passo 34 - Guiding the lower belt (gantry - left)	39
Passo 35 - Guiding the lower belt	40
Passo 36 - Attaching the right belt tensioner	40
Passo 37 - Guiding the lower belt (gantry - right)	41
Passo 38 - Guiding the upper belt (gantry - right)	41
Passo 39 - Nextruder holder: parts preparation	42
Passo 40 - Securing the belts I.	42
Passo 41 - Securing the belts II.	43
Passo 42 - Securing the belts III.	43
Passo 43 - Attaching the Nextruder holder	44
Passo 44 - Installing the LoveBoard assembly	44
Passo 45 - Fan shroud assembly: parts preparation	45
Passo 46 - Attaching the fan shroud assembly	45
Passo 47 - Installing the Cable-clip	46
Passo 48 - Gruppo Nextruder: preparazione componenti	46
Passo 49 - Attaching the Nextruder assembly	47
Passo 50 - Heatsink fan: parts preparation	47
Passo 51 - Mounting the heatsink fan	48
Passo 52 - Connecting the heatsink fan	48
Passo 53 - Connettere il termistore NTC	49
Passo 54 - Connettere la ventola di stampa	49
Passo 55 - Connecting the hotend cables and motor	50
Passo 56 - Guidare i cavi dell'hotend	50
Passo 57 - Wiring check	51
Passo 58 - Print-head-cover-left: parts preparation	51
Passo 59 - Covering the electronics - left side	52
Passo 60 - Print-head-cover-right: parts preparation	52
Passo 61 - Connecting the loadcell and FS	53
Passo 62 - Installing the fitting	53
Passo 63 - Collegare il tubo in PTFE	54
Passo 64 - Almost there... ..	54
4. Heatbed upgrade	55
Passo 1 - Tools	56
Passo 2 - Loosening the heatbed	56
Passo 3 - Aprire il piano riscaldato	57
Passo 4 - Removing old expansion joints	57
Passo 5 - New expansion joints: parts preparation	58
Passo 6 - Installazione delle viti per i giunti di espansione	58
Passo 7 - Installazione dei nuovi giunti di espansione	59
Passo 8 - Inserting the heatbed spacer	59
Passo 9 - Viti del Piano riscaldato: preparazione componenti	60
Passo 10 - Securing the heatbed	60

Passo 11 - Allineatore per giunti di espansione	61
Passo 12 - Aligning the front side expansion joint	61
Passo 13 - Aligning the front left expansion joint	62
Passo 14 - Allineamento del giunto di espansione sul lato sinistro	62
Passo 15 - Aligning the rear left expansion joint	63
Passo 16 - Allineamento del giunto di espansione posteriore centrale	63
Passo 17 - Disconnecting the Nextruder cables - left side	63
Passo 18 - Aligning the rear right expansion joint	64
Passo 19 - Aligning the right side expansion joint	64
Passo 20 - Allineamento del giunto di espansione anteriore destro	65
Passo 21 - Fissare il piano riscaldato	66
Passo 22 - Nozzle wiper assembly: parts preparation	67
Passo 23 - Assemblare il raschietto dell'ugello	67
Passo 24 - Montaggio del raschietto dell'ugello	68
Passo 25 - Sticking the wiper pad	68
Passo 26 - Right metal sheet: parts preparation	69
Passo 27 - Preparing the right metal sheet	69
Passo 28 - Attaching the handle and FS	70
Passo 29 - Securing the side filament sensor	70
Passo 30 - Mounting the right metal sheet	71
Passo 31 - Inserimento tubo in PTFE	71
Passo 32 - Pannello laterale destro: preparazione dei componenti	72
Passo 33 - Installare il pannello laterale destro	72
Passo 34 - Lato sinistro: preparazione dei componenti	72
Passo 35 - Installazione dei pannelli del lato sinistro	73
Passo 36 - Connettere i cavi del motore	73
Passo 37 - Copertura xBuddy: preparazione dei componenti	74
Passo 38 - Coprire la scheda xBuddy	74
Passo 39 - Coprire i cavi	75
Passo 40 - Pannello dello sportello: preparazione dei componenti	75
Passo 41 - Installazione del pannello dello sportello	76
Passo 42 - Installare la copertura superiore	76
Passo 43 - Done	77
5. Preflight check	78
Passo 1 - Print Sheet	79
Passo 2 - Belt tensioning	80
Passo 3 - Firmware Download	81
Passo 4 - Firmware Flash	81
Passo 5 - Selftest	82
Passo 6 - Finish	82

1. Introduction





PASSO 1 Preparing the upgrade kit



- This manual guides you through upgrading your **Prusa CORE One+ to CORE One+ (Gen 2)**.
- Prepara il kit d'aggiornamento ricevuto da Prusa Research.
- ⓘ Tutte le parti in plastica necessarie sono incluse nel kit.
- 📌 Le parti stampabili sono anche disponibili su [Printables.com](https://www.printables.com).

PASSO 2 Tools Required

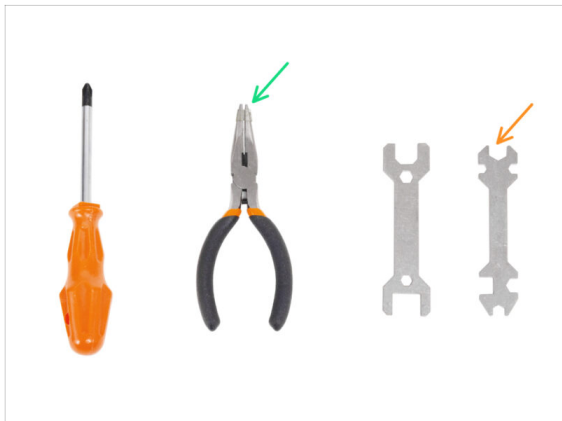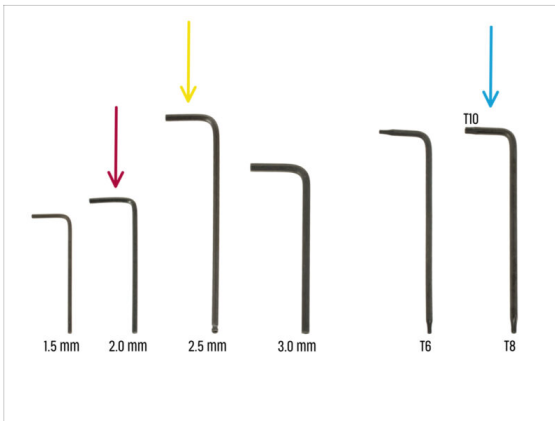

📌 The tools needed for this upgrade are **not included in the kit**. Please use the tools that came with your original CORE One+ printer.

- **Per i capitoli successivi, prepara questi strumenti:**
- 2.0mm Allen key
- 2.5mm Allen key
- Chiave / Cacciavite Torx T10
- Needle-nose pliers
- Chiave universale con l'apertura grande come un dado M3.

PASSO 3 Unloading the filament



- 🔵 Unload the filament. Visit the menu **Filament** and select **Unload filament**.
- 🟡 Scarica il filamento dalla stampante.
- ⬛ Rimuovi la bobina di filamento dalla stampante.

PASSO 4 Moving the Z-axis



- ⓘ Before you begin, move the heatbed to an accessible position.
- ⚠️ Durante questa fase, **tieni lo sportello della stampante chiuso** e non mettere le mani all'interno.
- 🔵 Nel menu della stampante, vai su **Controllo -> Auto Home**.
- 🟡 After Auto Home, move the heatbed down via **Control -> Move Axis -> Move Z** until the highlighted screws and the underside of the heatbed are accessible (minimum **200 mm**).
- ⓘ In questo modo entrambe le aree saranno facilmente accessibili durante la procedura, dato che dovranno essere gestite in seguito nel manuale.

PASSO 5 Unplugging the printer




 Before you begin, make sure the **printer has cooled down** to ambient temperature.

-  Spegni la stampante utilizzando l'interruttore sul retro.
-  Scollegare la stampante dall'alimentazione.
-  Remove the steel sheet (optional).

2. Printer disassembly




PASSO 1 Tools

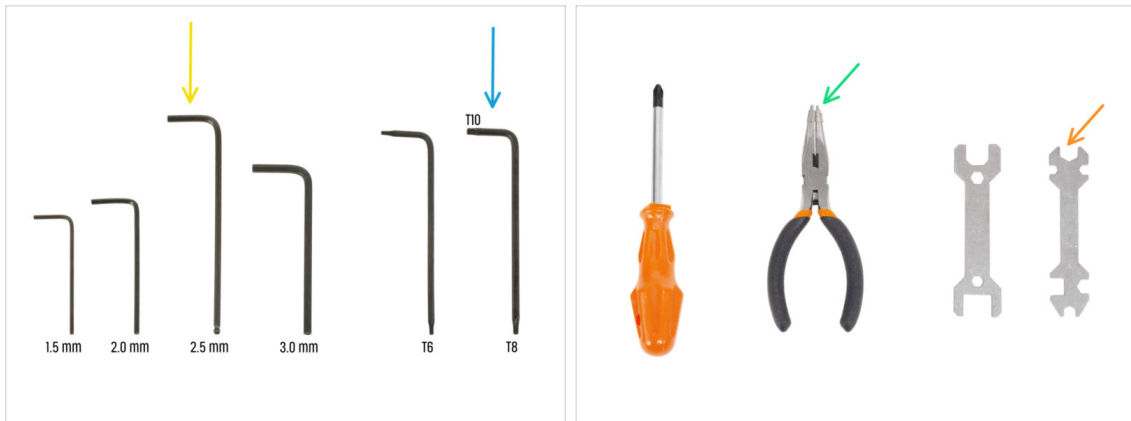

Tools necessary for this chapter:

- 2.5mm Allen key
- T10 key/screwdriver
- Needle-nose pliers
- Universal wrench

PASSO 2 Rimuovere il pannello dello sportello

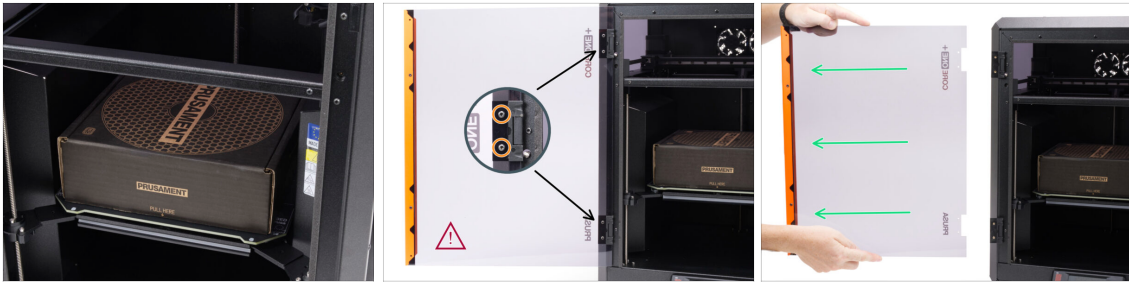

We recommend **protecting the heatbed** during handling. An empty Prusament box is an ideal protective layer.



For easier and safer handling during the upgrade, remove the door. **Proceed carefully** to avoid injury or damage to the door panel.



Allenta e rimuovi le due viti M3x5rT che fissano il pannello dello sportello in entrambe le cerniere.



È essenziale **tenere saldamente il pannello dello sportello** mentre si allentano le viti per evitare che cada.



Start removing the screws from the lowest.



Carefully slide the door panel out of the hinges. Leave the hinges open for the remainder of the upgrade.



Place the door panel and the four screws in a **clean and safe** area to avoid any damage.



Ensure that the shaft that is inside the hinge does not fall out. If the shaft falls out, insert it back in, or set it aside along with the hinge part. We will mount these back on at the end of the assembly.

PASSO 3 Rimuovere il pannello superiore




- From the inside, gently push out all the nylon rivets securing the top cover with your finger.
- Using needle-nose pliers, carefully grasp the rivet head with the tip of the pliers and pull it out.
 - ❗ You can also use the previously mentioned **Core-one-snap-rivet-remover**.
- ⚠ Be careful not to damage the top panel.
- If the lower part of a rivet remains in the panel, grasp it with pliers and remove it as well.
- Remove the top panel from the printer.

PASSO 4 Removing the left side cover



- Using the same procedure, remove all five nylon rivets securing the left side cover.
- Remove the side cover from the printer.
- Set it aside in a safe, clean place.

PASSO 5 Removing the left metal panel

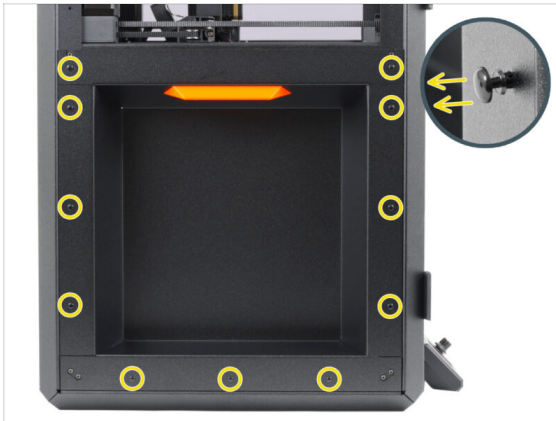

- Remove the eleven nylon rivets securing the left steel panel.
 - 📌 Start with the bottom rivets. **Support the panel by hand** when removing the last rivets to prevent it from falling.
- Remove the metal panel from the printer.

PASSO 6 Removing the right side cover




- Using the same procedure, remove all five nylon rivets securing the right side cover.
- Remove the side cover from the printer.
- Set it aside in a safe, clean place.

PASSO 7 Removing the right handle



- Move to the opposite side of the printer and focus on the underside of the orange handle.
- Press the black collet on the PTFE tube into the handle to unlock the tube.
- While holding the collet pressed in, pull out the PTFE tube.
- Using the T10 screwdriver release two M3x8rT screws securing the handle and the filament sensor.
- Remove the handle from the printer.

PASSO 8 Removing the right side panel

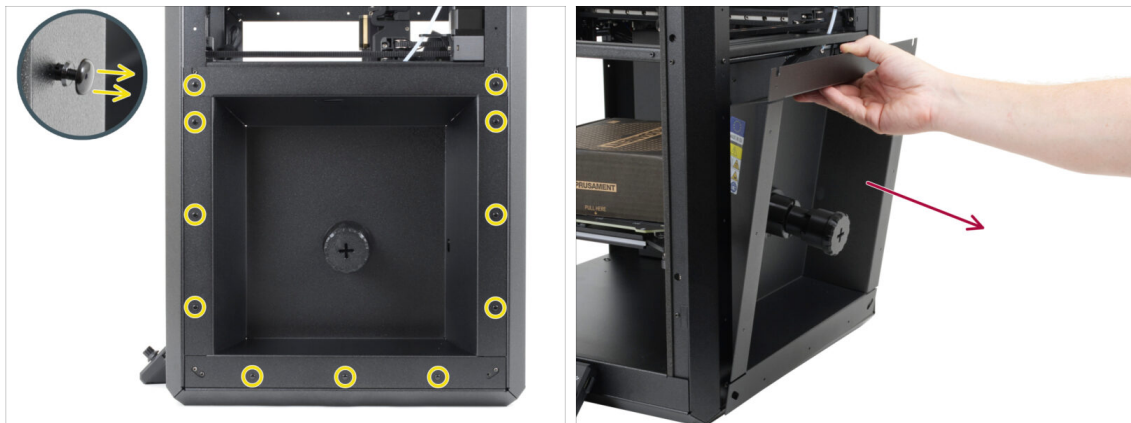

- Remove the eleven nylon rivets securing the right steel panel.
 - 📌 Start with the bottom rivets. **Support the panel by hand** when removing the last rivets to prevent it from falling.
- Remove the metal panel from the printer.

PASSO 9 Detaching the Bowden-guide



- Remove the M3x10 screw and remove the Bowden guide from the motor mount.

i *Pro tip:* Once the Bowden guide is removed, thread the M3x10 screw back into the motor mount by a few turns. This will keep the nut in place and make reassembly easier.

- Leave the Bowden guide hanging on the PTFE tube.

📌 The Bowden guide does not need to be removed completely. Loosen it to improve access for later steps.

PASSO 10 Uncovering the cables



- On the inside of the printer, remove the two M3x4rT screws holding the back cover.
- On the back of the printer, slide the center cover down to unlock it, then remove it.

PASSO 11 Uncovering the xBuddy electronics



- ◆ Unscrew all six M3x4rT screws securing the electronics sheet (xBuddy box cover).
- ◆ Slide the xBuddy box cover out of the electronics box and remove it from the printer.

PASSO 12 Disconnecting the motor cables



- ⚠ The connectors have a safety latch that must be pressed when disconnecting.
- ◆ Disconnect the X motor cable from the first connector on the left.
- ◆ Disconnect the Y motor cable from the second connector on the left.
- ◆ Gently pull the Y motor cable slightly to create some slack while keeping the connector inside the electronics compartment.
- ◆ Gently pull the X motor cable slightly to create some slack while keeping the connector inside the electronics compartment.
- ⚠ If you feel resistance, **stop pulling**. If the cable cannot be moved at all, cut the zip ties securing the cable bundles. **Be careful not to damage any cables.**

PASSO 13 Unplugging the PTFE tube




- Move to the inside of the printer.
- Slide the bowden-bend over the fitting in the Nextruder.
- Press the black collet in the fitting down, preferably using two fingers.
- Pull the PTFE tube out of the fitting.
- Using the 8mm cutout on the Universal wrench, remove the M5-4 fitting.

PASSO 14 Disconnecting the Nextruder cables - left side




- Utilizzando la chiave a brugola da 2,5 mm, rimuovi la vite M3x10 che tiene il coperchio laterale.
- Remove the cover.
- ① *Pro tip: Keep the screws and nuts with the removed parts whenever possible. This will make reassembly easier.*
- ⚠ **The connectors have a safety latch that **must be pressed** when disconnecting.**
- Disconnect all cables on the left side of the Nextruder.
 - Do not disconnect the Nextruder main cable connector.
- Disconnect the extruder motor cable on the top side of the Nextruder.

PASSO 15 Disconnecting the Nextruder cables - right side

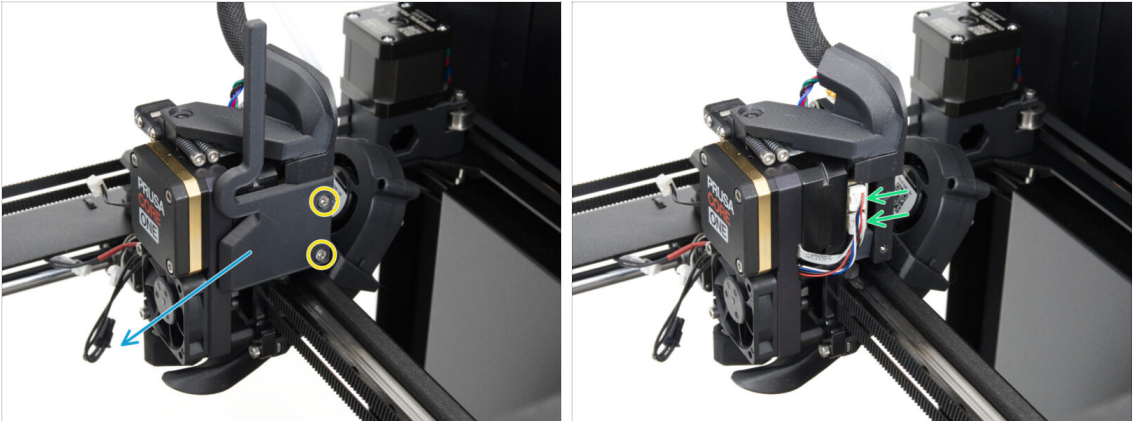


- ✦ Using the Allen key, remove two M3x6 screws securing the right cover on the Nextruder.
- ✦ Remove the cover.
- ⚠ The connectors have a safety latch that **must be pressed when disconnecting**.
- ✦ Disconnect both cables from the right side of the LoveBoard.

PASSO 16 Removing the Cable-clip

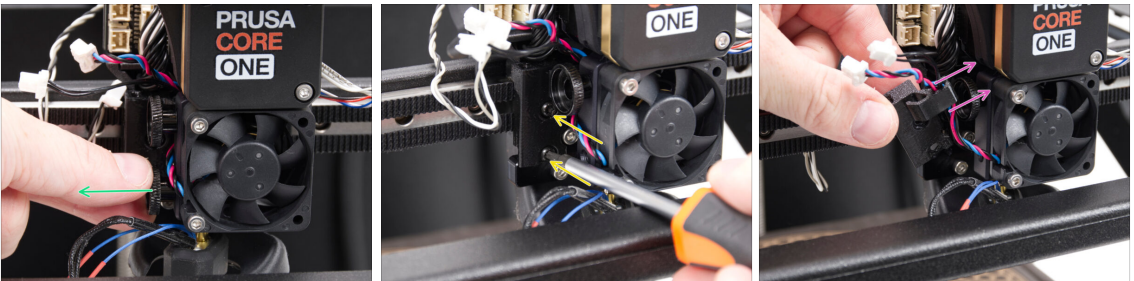



- ✦ Remove the lower thumb screw.
 - ❗ Leave the upper thumb screw in place. It provides access to the screw on the Cable-clip.
- ✦ Remove the two M3x4rT screws securing the Cable-clip, then remove the cable clip from the printer.
- ✦ Unhook all cables from the cable clip.

PASSO 17 Detaching the heatsink fan

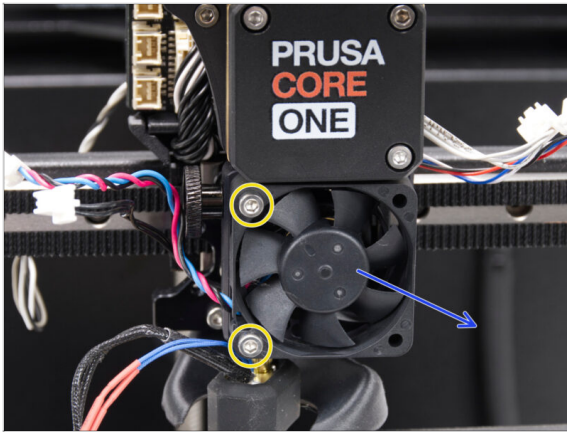


- Using the Allen key, remove two M3x18 screws securing the heatsink fan.
- Remove the heatsink fan from the printer.

PASSO 18 Removing the Nextruder assembly

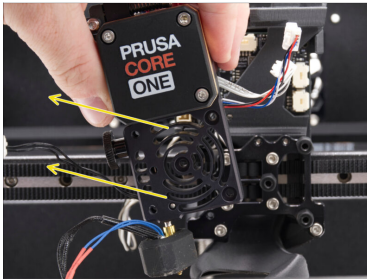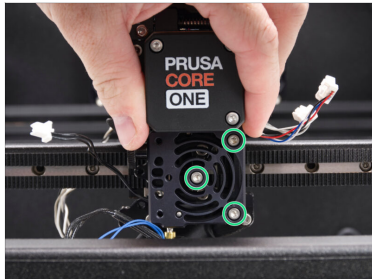


- Remove three M3x10 screws securing the Nextruder assembly to the X-axis.
 - CAUTION:** While loosening the last screw, **hold the Nextruder to prevent it from falling** and damaging the printer.
- Remove the Nextruder assembly from the printer.
- Set the Nextruder assembly aside in a safe place.

PASSO 19 Rimuovere il convogliatore ventola

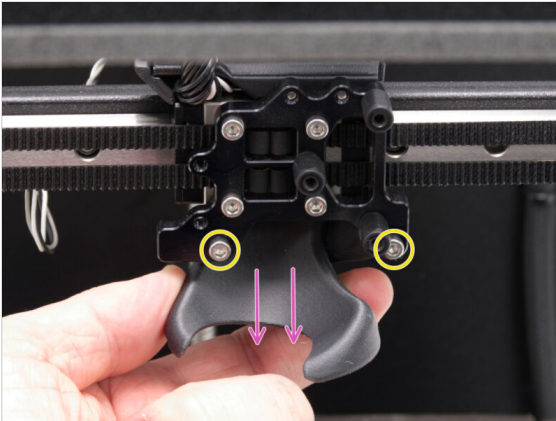

- Allenta e rimuovi le due viti M3x10 che fissano il convogliatore della ventola al supporto del Nextruder.
- Remove the fan shroud assembly with the print fan from the printer.
- Set the print fan assembly aside in a safe place.

PASSO 20 Removing the LoveBoard assembly

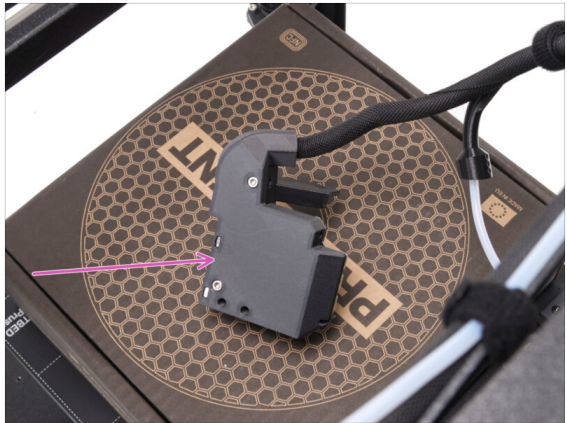

- From the back of the LoveBoard assembly, loosen the two M3x10 screws through the access holes to release the assembly.
- ① The screws remain inside the assembly.
- Place the LoveBoard assembly on the cardboard box placed on the heatbed.

PASSO 21 Chapter completed




- **Congratulations!** You have completed the partial disassembly of the printer and prepared it for the upgrade.
- Proceed to the **next chapter**.

3. Belts upgrade



PASSO 1 Tools

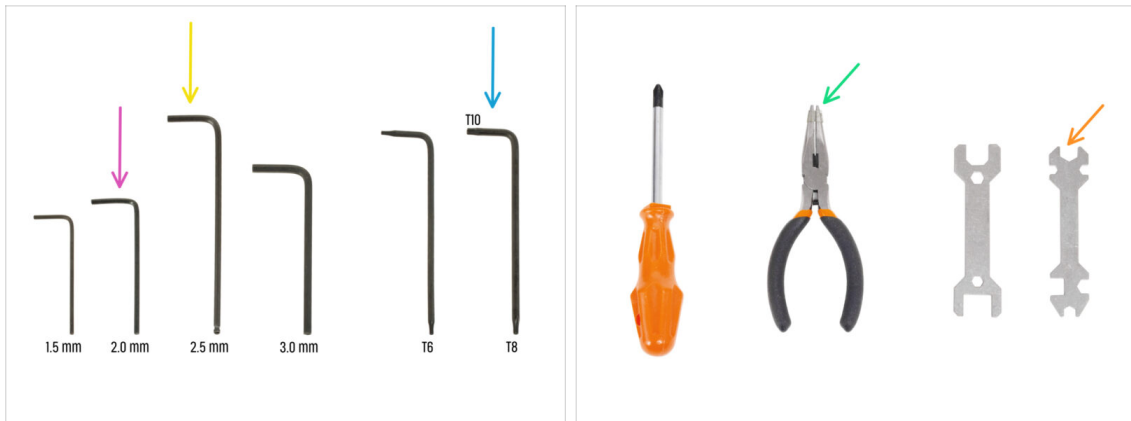

Tools necessary for this chapter:


- 2.0mm Allen key
- 2.5mm Allen key
- T10 key/screwdriver
- Needle-nose pliers
- Universal wrench

PASSO 2 Loosening the belts



- Using a 2.5 mm Allen key, remove the left belt tensioner.
- Be careful, the tensioner may fall out when loosened.
- Using the same method, loosen the belt tensioner on the right side.
- Ensure the M3nS nuts in the Belt-tensioner-pulleys do not fall out!

PASSO 3 Unlocking the belts

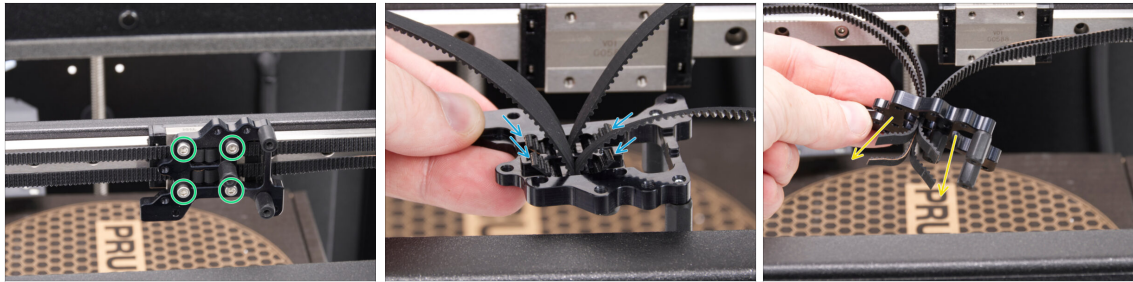


- Remove the four M3x10 screws securing the Nextruder holder.
- From the back of the holder, push all belt ends through the holder.
- Slide the Nextruder holder off the belts.

PASSO 4 Removing the belts




- Remove both belts from the assembly.
- ⚠ Caution: The belt tensioner idlers are **still attached to the belts**.

PASSO 5 Releasing the left motor

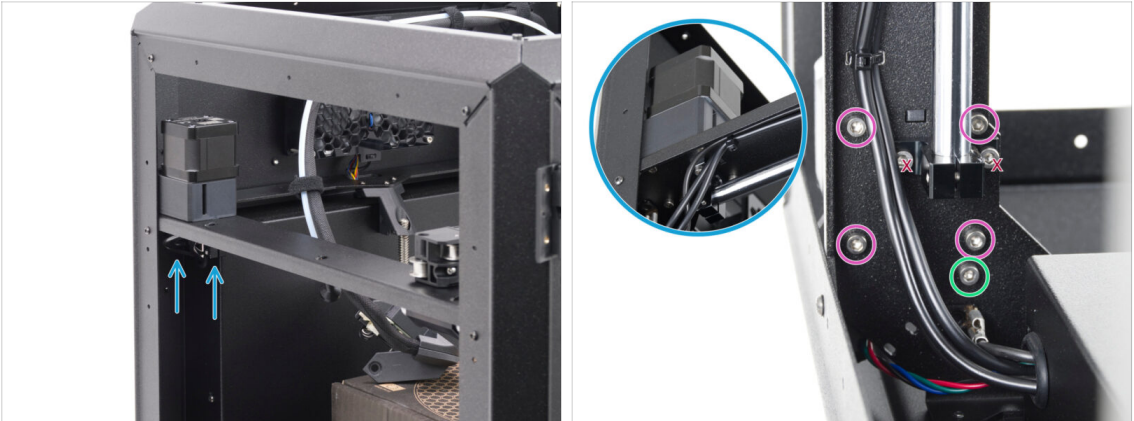

- Move to the underside of the left rear motor.
- Remove the four M3x30 screws securing the motor to the motor holder.
- Remove the M3x6 screw securing the motor holder.
- ⚠ Avoid removing the screws securing the rod holder.

PASSO 6 Releasing the right motor

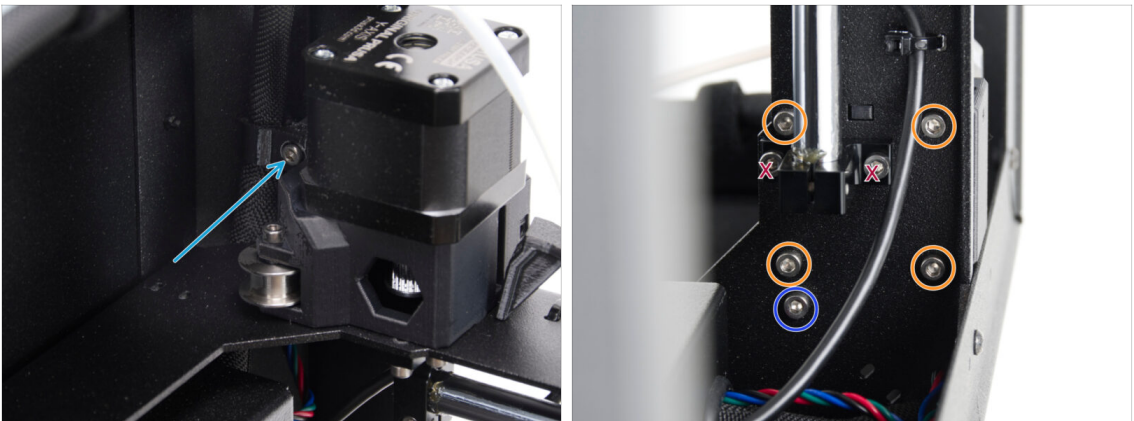

- Loosen the screw securing the main cable clip and leave it attached to the cable bundle.
- ⚠ Do not move the Main-cable-clip during the upgrade.
- Move to the underside of the left rear motor.
- Remove the four M3x30 screws securing the motor to the motor holder.
- Remove the M3x6 screw securing the motor holder.
- ⚠ Avoid removing the screws securing the rod holder.

PASSO 7 Disassembling the right motor



We recommend **protecting the heatbed during handling**. An empty Prusament box is an ideal protective layer.



Focus on the rear-right motor.



Remove the motor from the motor holder.



Place the motor on the edge of the printer frame.



Using a 2.0 mm Allen key, loosen the two set screws securing the pulley.



Remove the pulley.



Carefully cut the zip tie securing the motor cable to the motor mount.



This pulley will no longer be used. Set it aside or discard it to **avoid confusing it with the new one**.

PASSO 8 New pulley: parts preparation (right motor)



Per i seguenti passi prepara:



GT1.5-21 pulley (1x)




GT1.5 belt (2x)




Pulley-offset-tool (1x)

PASSO 9 Installing the new pulley (right motor)

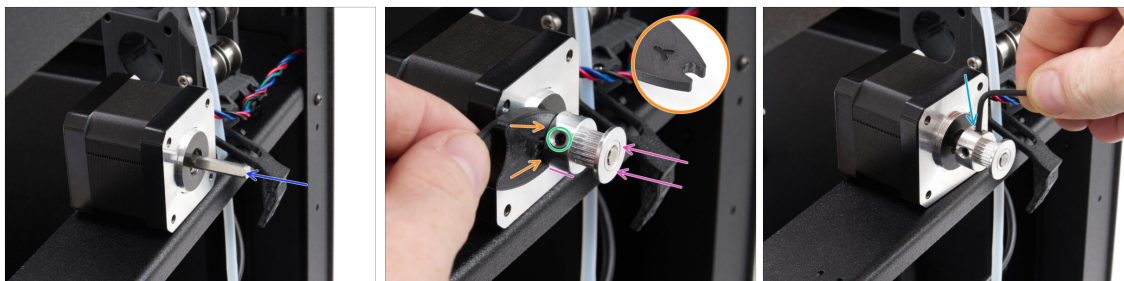


- Rotate the motor shaft so that the flat faces you. **Do not rotate the shaft any further.**
- Slide the new GT1.5-21 pulley onto the end of the shaft, with the set screw side **facing the motor.**
- Insert the Pulley-off-set-tool, with the **side marked "Y"**, between the motor and the pulley to set the correct distance.
- Press the pulley against the Pulley-off-set-tool and tighten the set screw **against the flat on the motor shaft.**
- Rotate the pulley and tighten the second set screw.

PASSO 10 Inserting the lower belt (right motor)

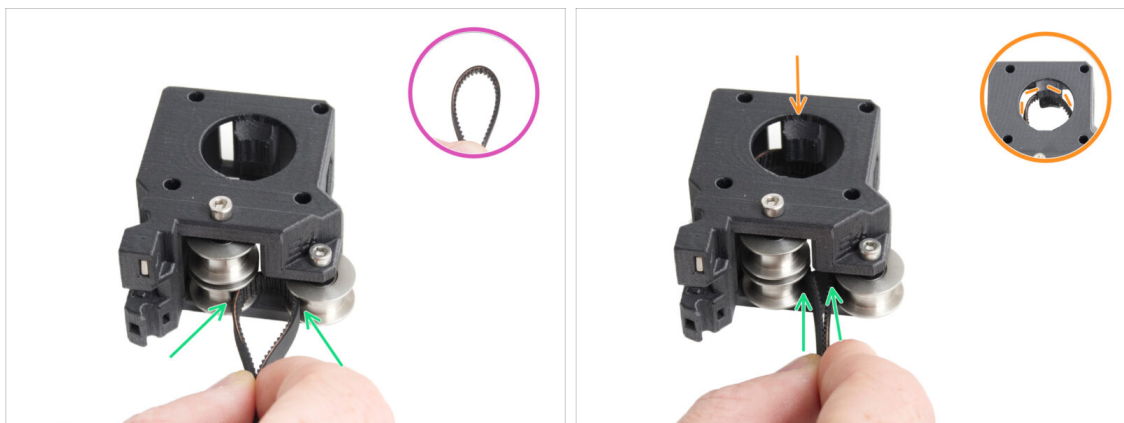

- Remove the motor mount from the printer.
- Take one of the belts and form a loop with the **teeth facing inward.**
- Push the belt loop into the motor mount **between the two lower idlers.**
- Viewed from the top, the belt loop should follow the circular cutout in the motor mount as closely as possible.


PASSO 11 Securing the lower belt (right motor)

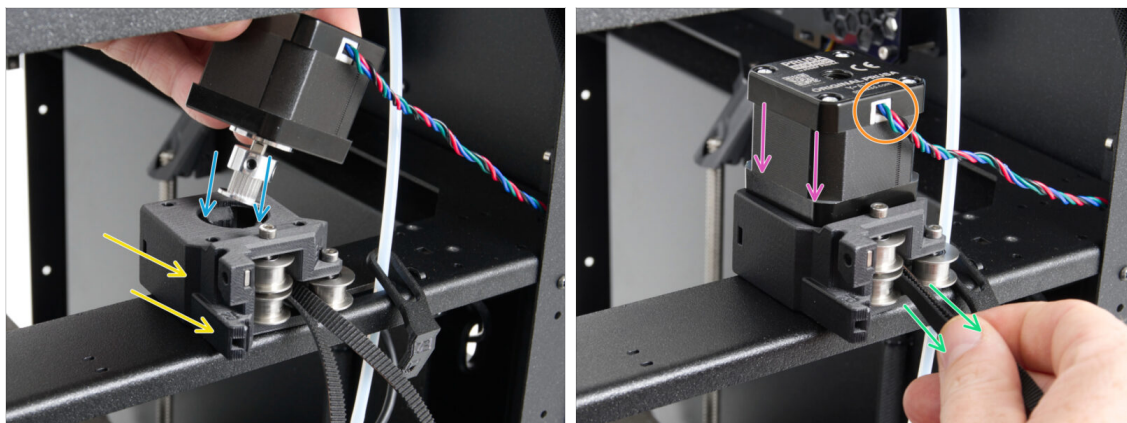

Throughout the process, make sure the **belt does not slip out of the assembly**.


- Place the motor mount onto the printer frame. The side with the two idlers must be facing down and towards you.
- Insert the motor with the pulley into the belt loop inside the motor mount.
- Fully seat the motor against the motor mount.
 - Orient it so that the **motor cable faces outward** (towards you).
- Gently pull both ends of the belts to secure the belt loop around the pulley.

PASSO 12 Guiding the lower belt (right motor)

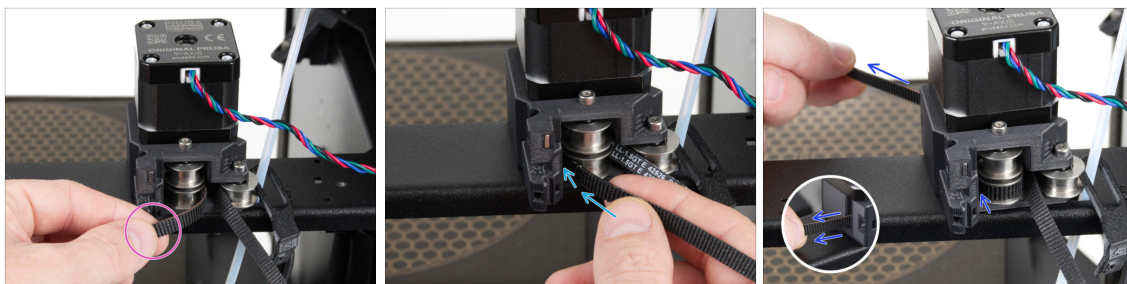


- Grasp the belt coming from the left idler.
- Route the belt around the idler from the left side and insert it into the motor mount.
- Sul lato opposto, controlla che la cinghia esca dall'apertura e tirala fuori finché non sporge di circa 15 cm (6 pollici).

PASSO 13 Guiding the upper belt (right motor)

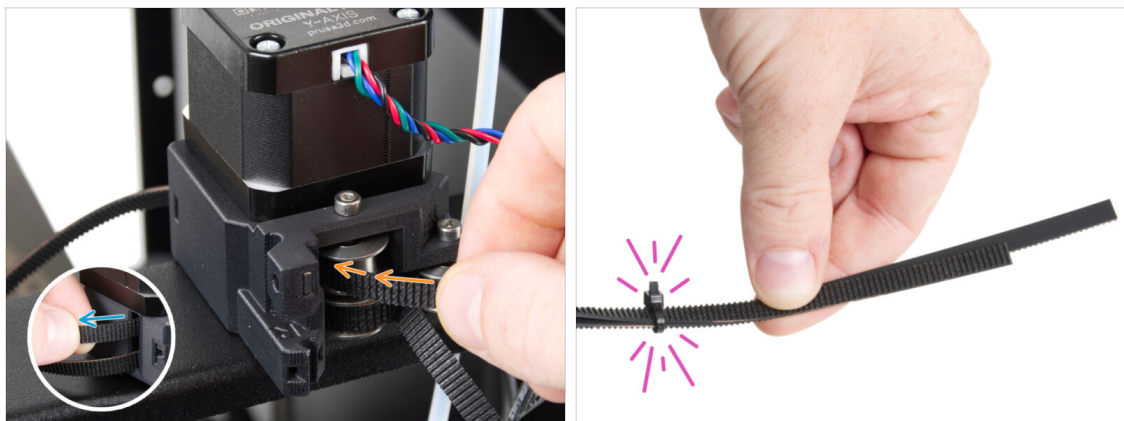


- Take the second new belt.
- Fai passare un'estremità della cinghia attorno alla **puleggia superiore** partendo dal lato sinistro. Assicurati che i **denti siano rivolti nella direzione opposta** rispetto alla puleggia.
- From the opposite side, watch for the belt to come out through the opening.
 - Pull it through until approximately the same length of belt is sticking out - around 15 cm (6 in).
- *Pro tip:* To prevent the belts from being accidentally pulled out, loosely secure their ends together with a zip tie.

PASSO 14 Securing the motor cable (right motor)

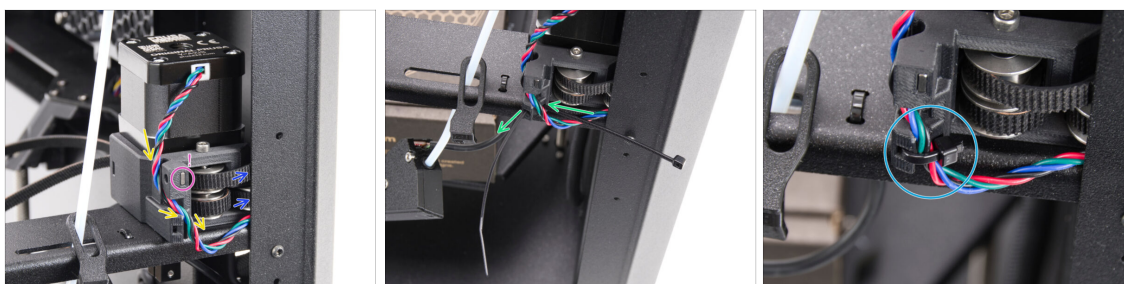


- 📌 Throughout the process, **make sure the belts do not slip out of the assembly.**
- Move the assembly closer to the rear corner of the printer.
- Route the free ends of the belts toward the rear of the printer. Leave them loose for now.
- Make sure the M3nN nut **is still inserted** in the motor mount and has not fallen out.
 - **If the M3nN nut has fallen out**, reinsert it fully into the part.
- Route the motor cable through the cable channel, as shown in the picture.
- Push the zip tie through the hole in the printed part.
- Carefully secure the cable with the zip tie.

PASSO 15 Fixing the right motor

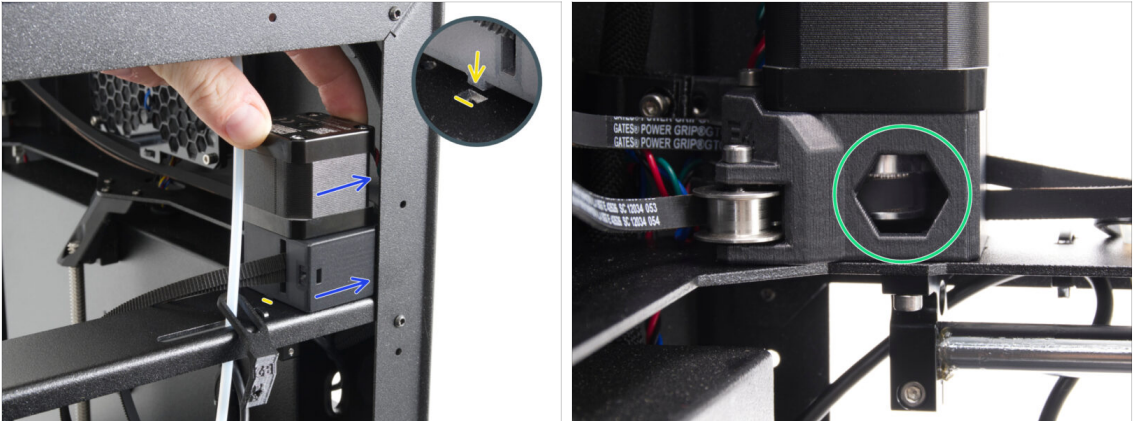


- Rotate the motor assembly with the motor mount into the correct position. The **belt pulleys must face the rear side** of the printer.
- The motor mount has a tab on the bottom side that must fit into the rectangular cutout in the frame.
- From the inner side of the printer, check that the lower belt is seated on the pulley through the hexa hole in the motor-mount.

PASSO 16 Right motor screws: parts preparation

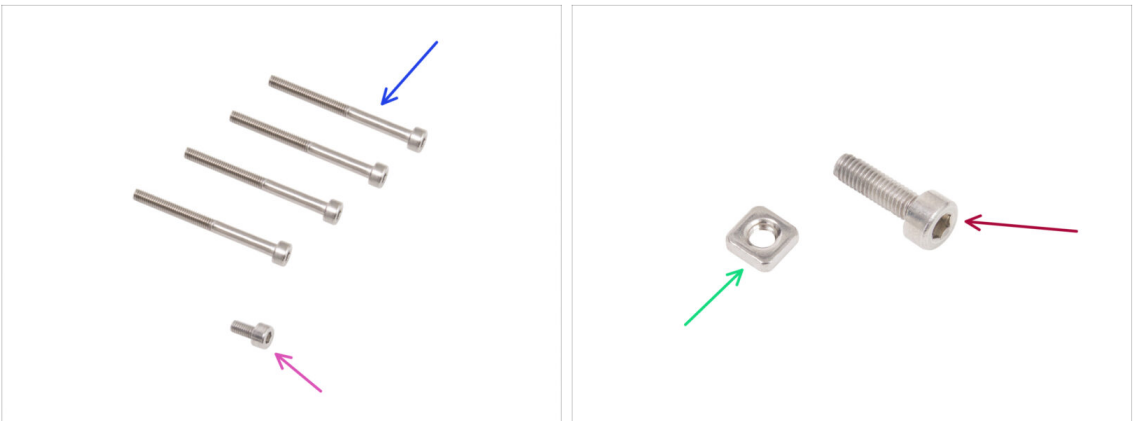



- For the followings steps, please prepare:
- M3x30 screw (4x) you removed earlier
- Vite M3x6 (1x) rimossa in precedenza
- M3nS nut (1x) you removed earlier may have remained inserted from the outer side of the motor mount.
- Vite M3x10 (1x) rimossa in precedenza

PASSO 17 Tightening the right motor

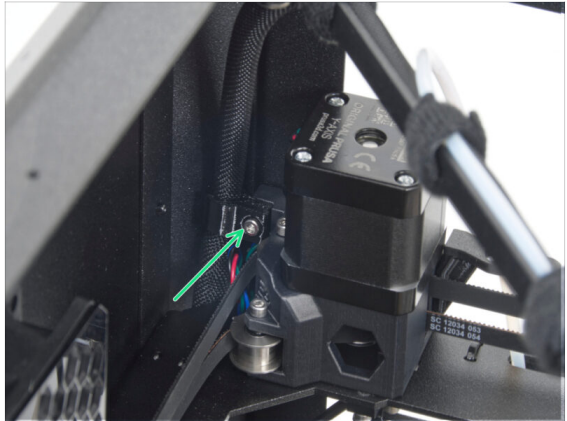


- ✦ Fissa l'intero gruppo motore dal lato inferiore del telaio usando quattro viti M3x30.
- ✦ Finally, secure the motor mount with an M3x6 screw.
- ✦ From the top side, behind the motor, attach the Main-cable-clip back to the motor mount using the pre-inserted M3x10 screw.

PASSO 18 Securing the Bowden-guide

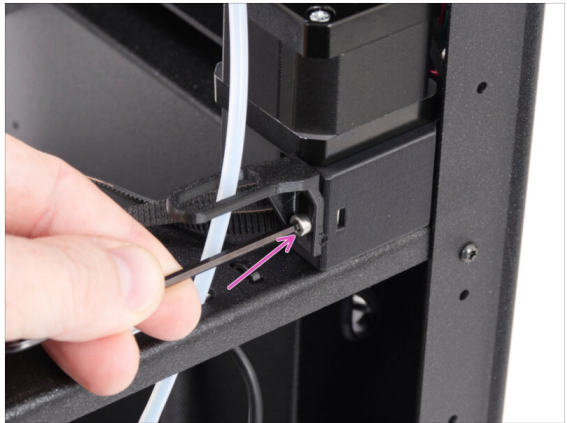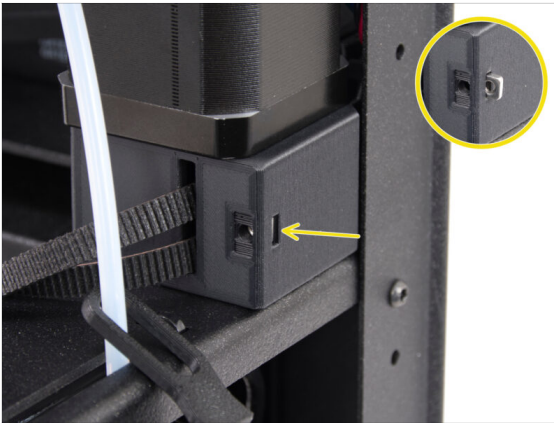

- ✦ From the outer side of the motor mount, insert the M3nN nut if it is not already inserted.
- ✦ Attach the Bowden-guide to the motor-mount using the M3x10 screw.

PASSO 19 Disassembling the left motor

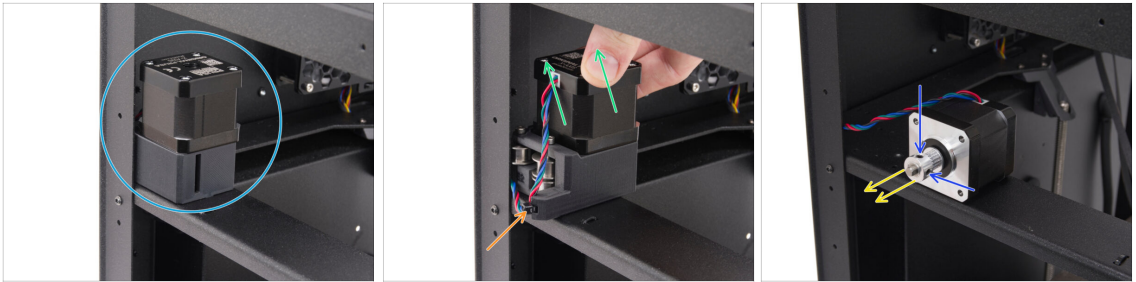


- Focus on the rear-left motor.
- Rotate the motor assembly with the cable facing outward.
- Carefully cut the zip tie. Be careful not to cut the cable.
- Remove the motor from the motor-mount and remove the motor-mount from the printer.
- Place the motor on the printer frame.
- Using a 2.0 mm Allen key, loosen the two set screws securing the pulley.
- Remove the pulley.



This pulley will no longer be used. Set it aside or discard it to **avoid confusing it with the new one**.

PASSO 20 New pulley: parts preparation (left motor)

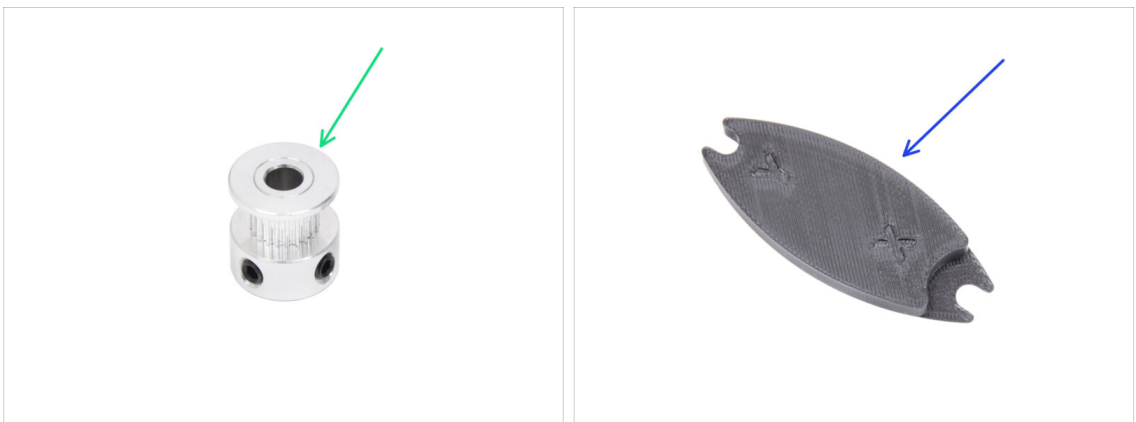

- **Per i seguenti passi prepara:**
- GT1.5-21 pulley (1x)
- Pulley-offset-tool (1x) *you used it before*

PASSO 21 Belt routing overview



Before routing the belts, familiarize yourself with their path through the CoreXY mechanism.


- The following diagrams show the routing of the upper and lower belts and their orientation within the assembly.

● Upper belt path

● Lower belt path


- **Do not perform any actions in this step.**

PASSO 22 Installing the new pulley (left motor)

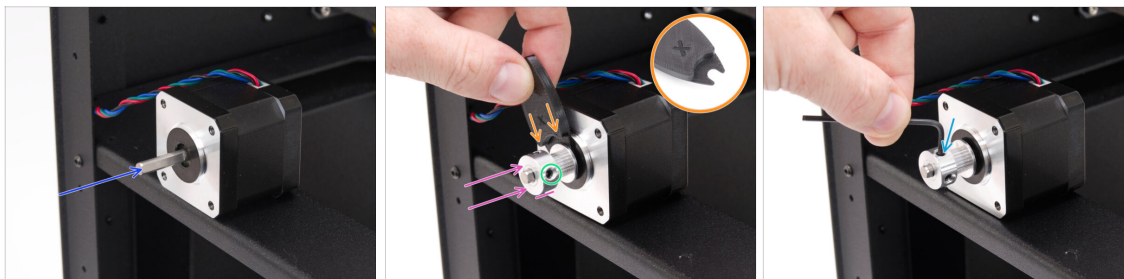

- Rotate the motor shaft so that the flat faces you. **Do not rotate the shaft any further.**
- Slide the new GT1.5-21 pulley onto the shaft, with the set screw side facing **away from the motor**.
- Insert the Pulley-offset-tool, with the side marked "X", between the motor and the pulley to set the correct distance.
- Press the pulley against the Pulley-offset-tool and tighten the set screw **against the flat on the motor shaft**.
- Rotate the pulley and tighten the second set screw.

PASSO 23 Guiding the lower belt (left motor)

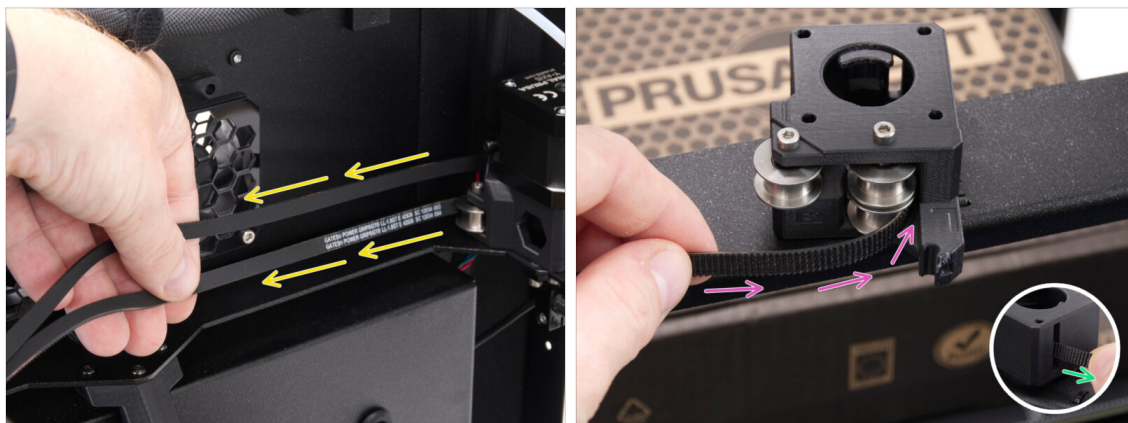


- Route both belts from the right motor towards the rear side of the printer and guide them to the left motor.
- Place the motor-mount onto the printer frame with the side containing one pulley facing downward.
- Route the **lower belt** around the lower idler from the right side.
 - ⚠ **Assicurati di tenere la cinghia inferiore che proviene dal motore di destra. La cinghia non deve essere attorcigliata lungo il suo percorso.**
- From the opposite side, pull the belt out approximately 15 cm (6 in).

PASSO 24 Inserting the upper belt (left motor)



- Take the **upper belt** and form a loop with the **teeth facing inward**.
- Push the belt loop into the motor mount **between the two upper pulleys**.
- Viewed from the top, the belt loop should follow the circular cutout in the motor mount as closely as possible.


PASSO 25 Securing the upper belt (left motor)

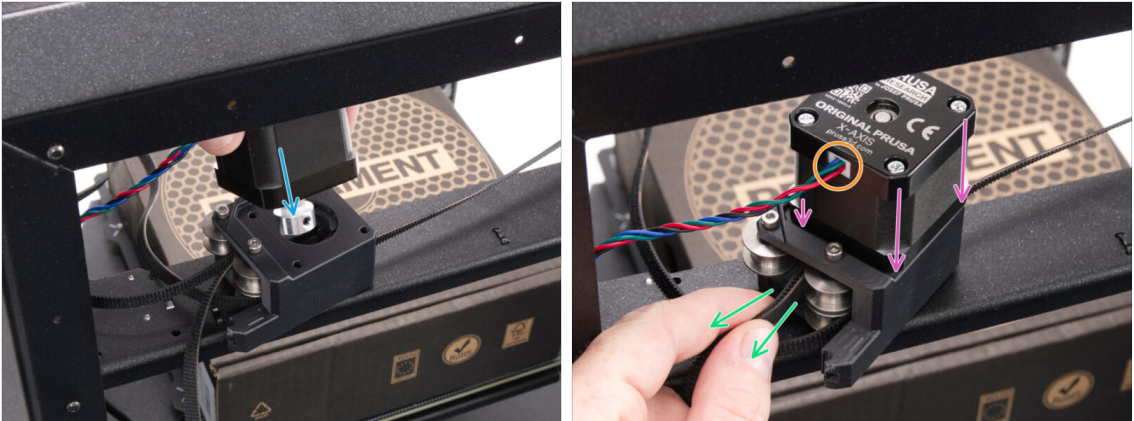

 Throughout the process, make sure the **belt does not slip out of the assembly**.

-  Insert the motor with the pulley into the belt loop inside the motor mount.
-  Fully seat the motor against the motor mount.
 -  Orient it so that the motor cable faces backward (towards the pulleys).
 -  Gently pull both ends of the belts to secure the belt loop around the pulley.

PASSO 26 Guiding the upper belt (left motor)

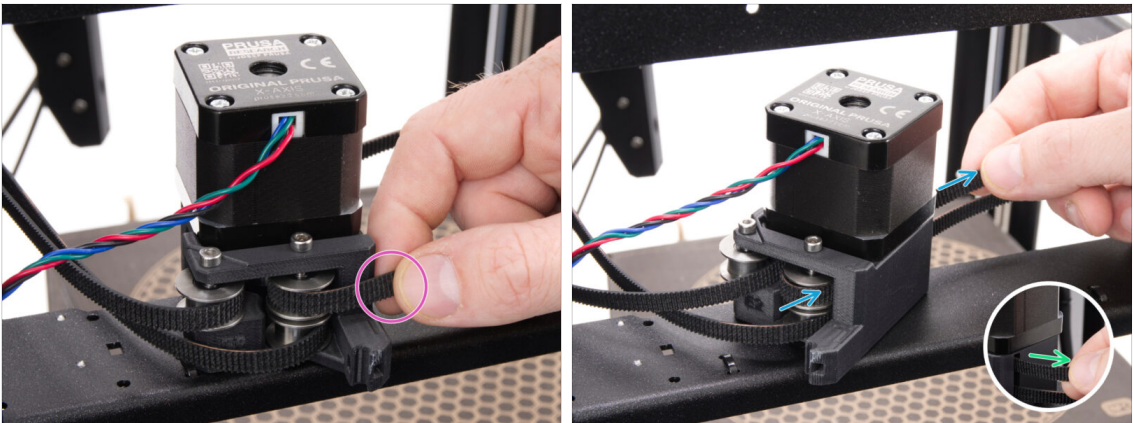

-  Grasp the right belt coming from the upper pulley.
-  Route the belt around the upper right pulley **from the right side** and insert it into the motor mount.
-  Sul lato opposto, controlla che la cinghia esca dall'apertura e tirala fuori finché non sporge di circa 15 cm (6 pollici).

PASSO 27 Securing the motor cable (left motor)




- Move the assembly closer to the rear corner of the printer.
- Route the motor cable through the cable channel, as shown in the picture.
- Push the zip tie through the hole in the printed part. And carefully secure the cable with the zip tie.

PASSO 28 Fixing the left motor



- Rotate the motor assembly with the motor mount into the correct position. The **belt idlers must face the rear side** of the printer.
- The motor mount has a tab on the bottom side that must fit into the rectangular cutout in the frame.
- From the inner side of the printer, check that the upper belt is seated on the idler through the hexa hole in the motor-mount.


PASSO 29 Belt tensioner pulleys: parts preparation

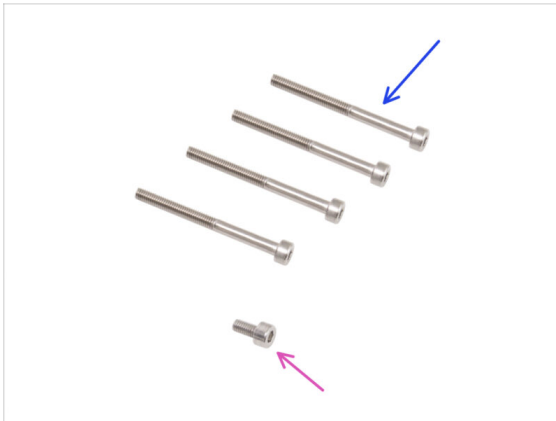

● Per i seguenti passi prepara:

- M3x30 screw (4x) *you removed earlier*
- Vite M3x6 (1x) *rimossa in precedenza*
- Belt tensioner assembly (2x) *you removed earlier*

PASSO 30 Tightening the left motor

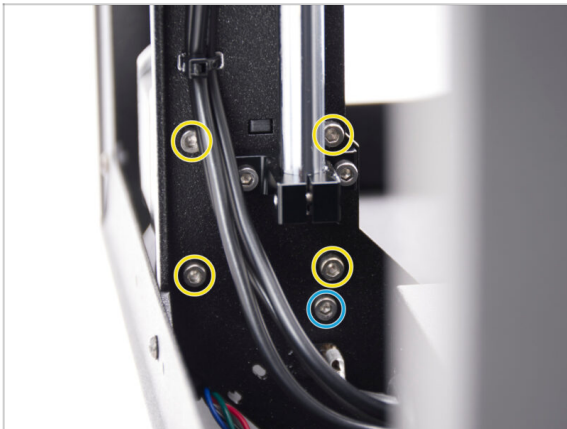

- Fissa l'intero gruppo motore dal lato inferiore del telaio usando quattro viti M3x30.
- Finally, secure the motor mount with an M3x6 screw.

PASSO 31 Guiding the upper belt (left side)




- ✿ Take the **upper** belt coming from the left motor.
- ✚ **Route the belt around the idler so that:**
 - ✿ The "L" (left) mark on the idler faces upward
 - ✚ The toothed side of the belt does not contact the idler
- ⚠ The belt must not be twisted along its path.

PASSO 32 Attaching the left belt tensioner



- ✚ Insert the idler with the belt wrapped around it into the "rails" of the left tensioner.
- ✿ From the opposite side, tighten the pre-inserted screw until the idler assembly starts to move.
- ✿ Stop tightening when the sliding part is flush with the stationary part.

PASSO 33 Guiding the upper belt (gantry - left)

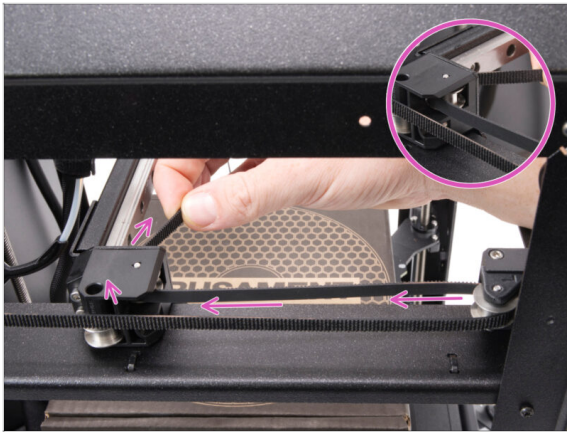


- ◆ Route the free end of the belt coming from the idler around the upper idler on the XY gantry.
- ❗ The XY gantry idlers may differ visually between printer versions. The procedure is identical for both 3D-printed and injection-molded parts.

PASSO 34 Guiding the lower belt (gantry - left)



- ◆ Take the lower belt coming from the left motor.
- ◆ Route it towards the XY gantry and around the lower idler.
- ◆ From the opposite side, pull the belt through until at least 8 cm (3 in) is sticking out.

PASSO 35 Guiding the lower belt

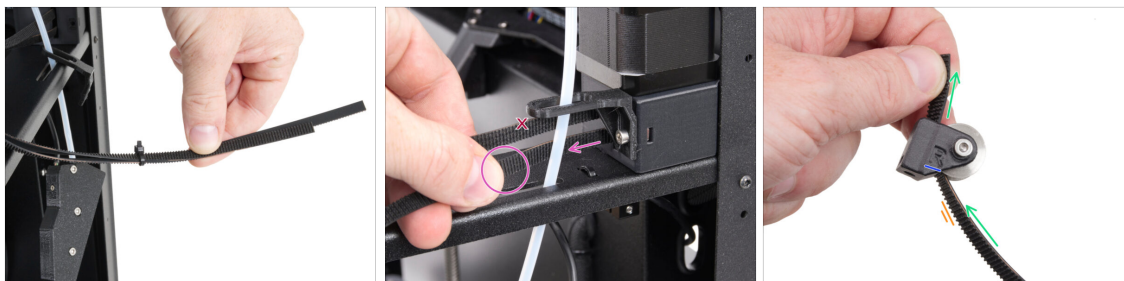

- Move to the right motor.
- Remove the zip tie securing the two free belt ends on the right side of the printer, if you used one.
- Take the **lower** belt coming from the right motor.
- **Route the belt around the idler so that:**
 - The "R" (right) mark on the idler faces upward
 - The toothed side of the belt does not contact the idler
- ⚠ The belt must not be twisted along its path.

PASSO 36 Attaching the right belt tensioner



- Insert the idler with the belt wrapped around it into the "rails" of the right tensioner.
- From the opposite side, tighten the pre-inserted screw until the idler assembly starts to move.
- Stop tightening when the sliding part is flush with the stationary part.

PASSO 37 Guiding the lower belt (gantry - right)



- Route the free end of the belt coming from the idler around the upper idler on the XY gantry.
- From the opposite side, pull the belt through until at least 8 cm (3 in) is sticking out.
- ⓘ The XY gantry idlers may differ visually between printer versions. The procedure is identical for both 3D-printed and injection-molded parts.

PASSO 38 Guiding the upper belt (gantry - right)




- Take the upper belt coming from the right motor.
- Route the belt around the upper idler on the XY gantry.
- From the opposite side, pull the belt through until at least 8 cm (3 in) is sticking out.




Se stai assemblando la Prusa INDX insieme all'aggiornamento GEN 2, **torna all'articolo adesso.**

PASSO 39 Nextruder holder: parts preparation

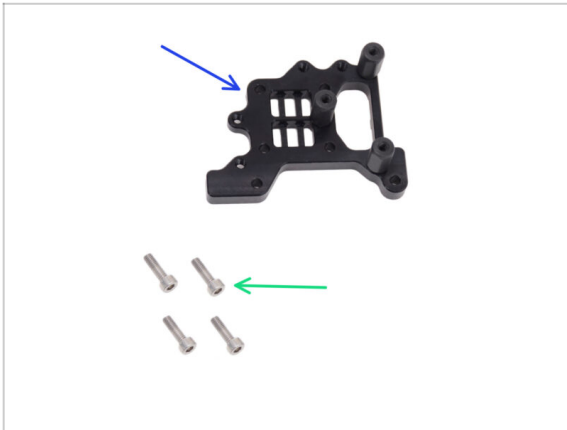

- For the following steps, please prepare:
- Nextruder holder assembly (1x) you removed earlier
- Vite M3x10 (4x) rimossa in precedenza

PASSO 40 Securing the belts I.

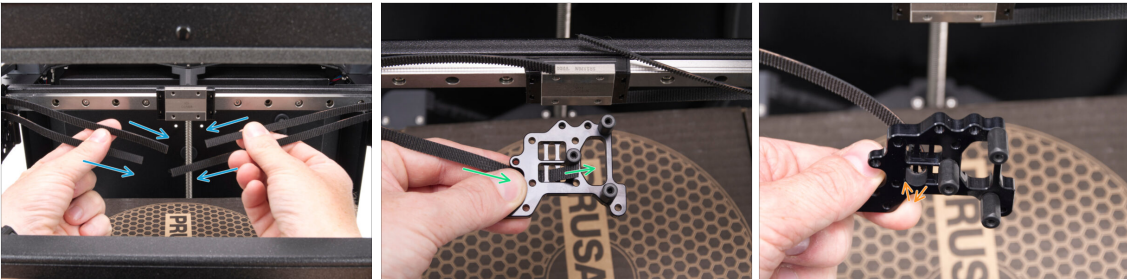


- Gently pull all belt ends towards the center of the printer.
- Keep the Nextruder holder in the same orientation as shown in the picture.
- Route the **lower left** belt through the center opening of the Nextruder holder from the rear side to the front.
- Pull the belt out so that approximately 15 mm protrudes.
- From the front side of the Nextruder holder, route the belt back through the left opening towards the rear.

PASSO 41 Securing the belts II.




- From the rear side, place the belt end against the Nextruder holder.
- Adjust the belt length so that the belt end is **flush with the edge** of the Nextruder holder.
- Repeat the same procedure for the **upper left belt**.

PASSO 42 Securing the belts III.

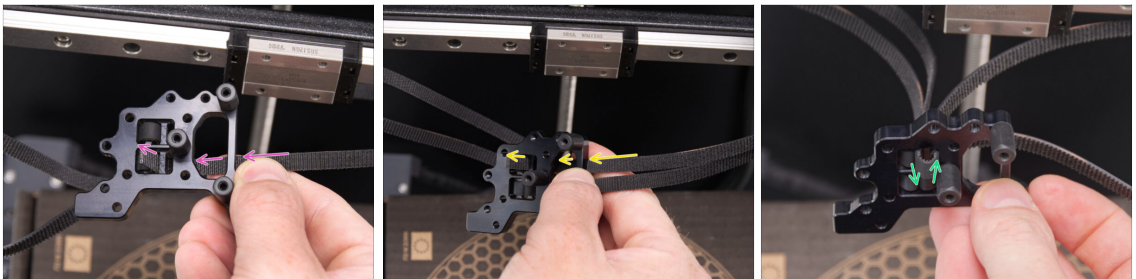


- From the rear side, route the **lower belt coming from the right** side through the center opening of the Nextruder holder.
- Pull out approximately 15 mm of the belt.
- Route the upper right belt through the rear side of the Nextruder holder.
- Bend both right-side belts and route them back through the right opening of the Nextruder holder.

PASSO 43 Attaching the Nextruder holder

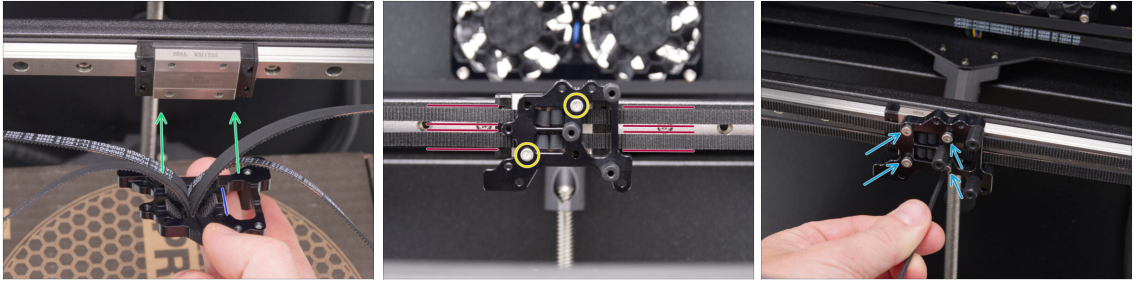

- Align the right-side belts with the edge of the Nextruder holder and adjust their length if needed.
- Align the Nextruder holder with the X-carriage. The Nextruder holder is attached from the belt side.
- Attach the Nextruder holder to the X-carriage and lightly secure it using one upper and one lower M3x10 screw.
- Check that all belts run straight and are not twisted.
- Insert the remaining two M3x10 screws and tighten all four screws firmly.

PASSO 44 Installing the LoveBoard assembly

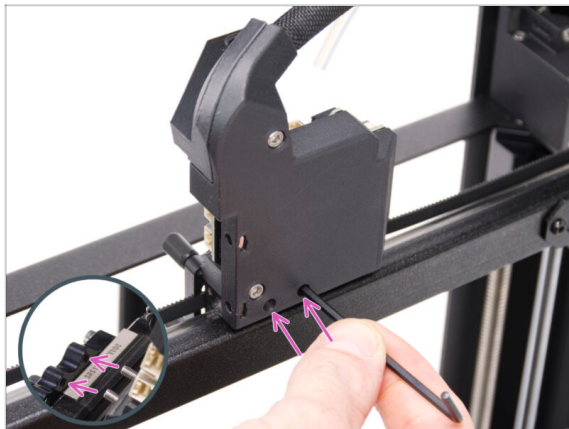

- Look at the rear side of the Nextruder holder.
- Attach the LoveBoard assembly to the rear side of the Nextruder holder while it is resting on the box.
- The LoveBoard assembly has two pre-inserted screws. Align them with the holes in the Nextruder holder and tighten them using a 2.5 mm Allen key.


PASSO 45 Fan shroud assembly: parts preparation



● **Per i seguenti passi prepara:**


- Fan shroud assembly (1x) *you removed earlier*
- Vite M3x10 (2x) *rimossa in precedenza*
- Cable-clip (1x) *you removed earlier*
- M3x4rT screw (2x) *you removed earlier*

PASSO 46 Attaching the fan shroud assembly

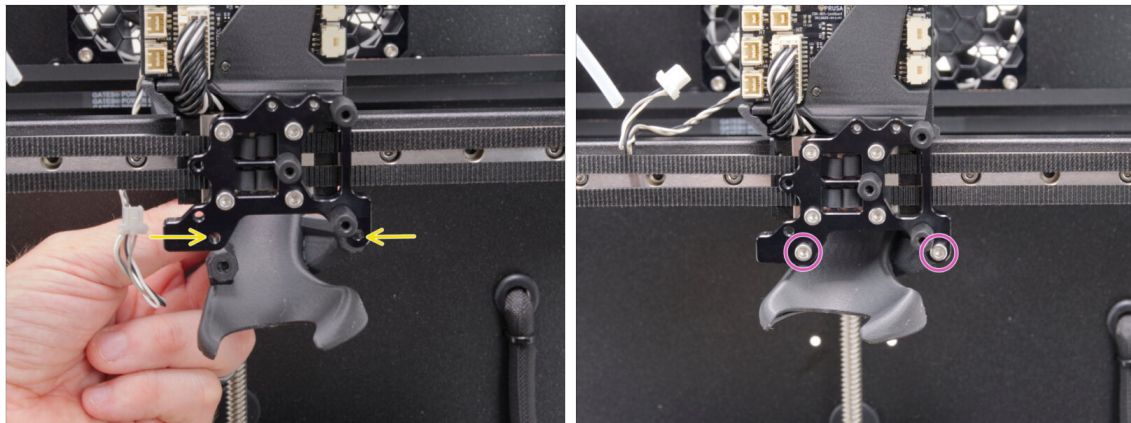


- From the rear side of the Nextruder holder, place the fan shroud assembly and align it with the holes.
- Secure the assembly using two M3x10 screws.

PASSO 47 Installing the Cable-clip

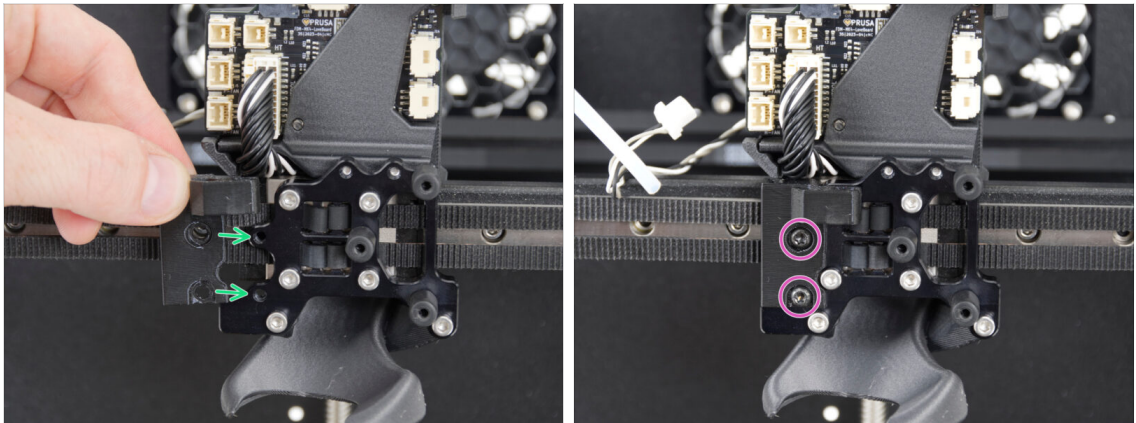


- From the front side of the Nextruder holder, place the Cable-clip in the orientation shown in the picture and align it with the holes.
- Secure the Cable-clip using two M3x4rT screws and tighten them using a T10 key.

PASSO 48 Gruppo Nextruder: preparazione componenti

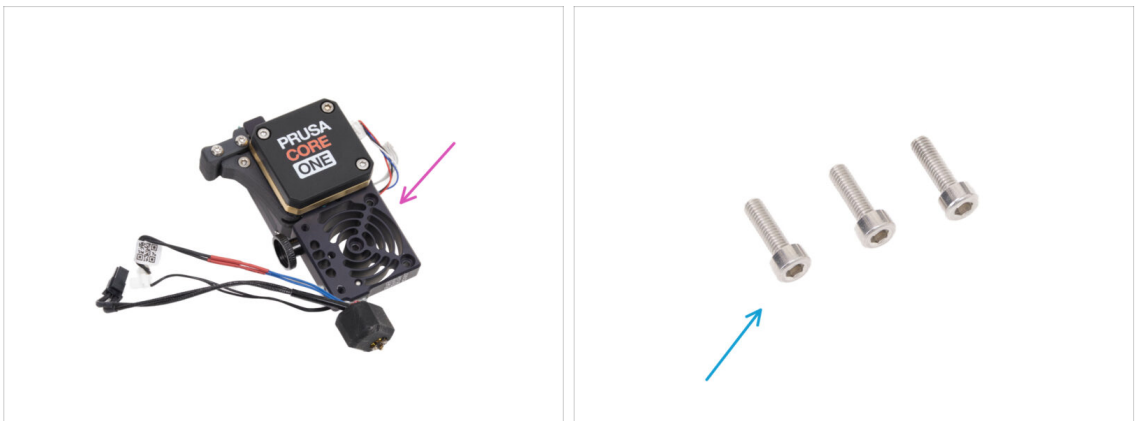

- Per i seguenti passi prepara:**
- Nextruder assembly (1x) *you removed earlier*
- M3x10 screw (3x) *you removed earlier*

PASSO 49 Attaching the Nextruder assembly

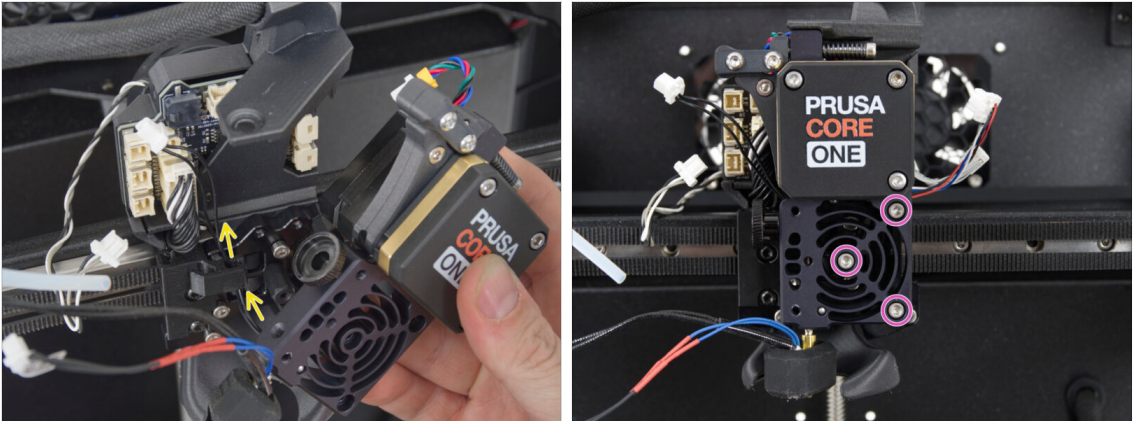


- Take the Nextruder assembly and position it against the Nextruder holder.
- Hook the NTC thermistor cable coming from the rear side of the heatsink into the right side of the Cable-clip.
- Place the Nextruder onto the Nextruder holder spacers, align it, and secure it using three M3x10 screws.

PASSO 50 Heatsink fan: parts preparation




- **For the following steps, please prepare:**
- Heatsink fan (1x) *you removed earlier*
- M3x20 screw (2x) *you removed earlier*
- Thumbs screw (1x) *you removed earlier*

PASSO 51 Mounting the heatsink fan

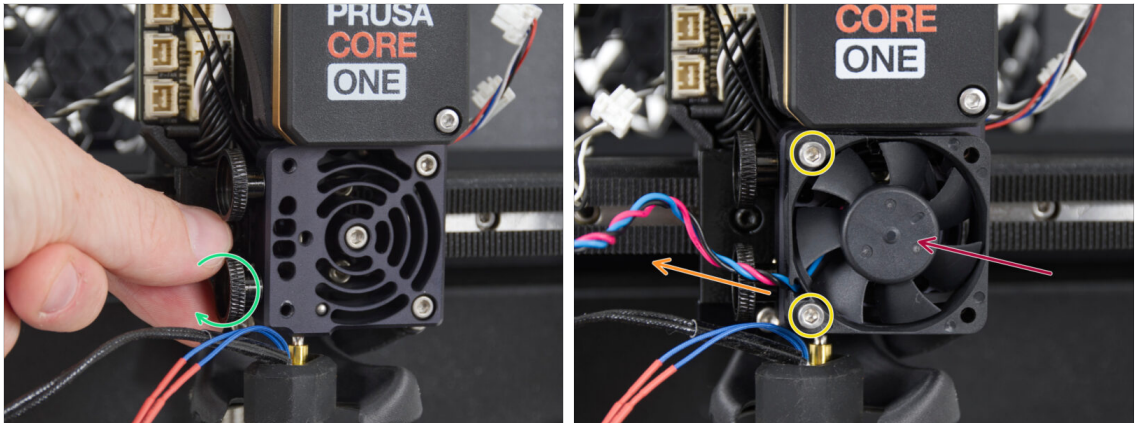



- 🟢 Screw the thumb screw back into the side of the Nextruder heatsink and tighten it firmly by hand.
- 🟡 Attach the Nextruder heatsink fan using two M3x20 screws.
 - 🔴 The fan must face outward with the side **without the sticker** facing out.
 - 🟠 The heatsink cable must exit from the **lower-left corner**.

PASSO 52 Connecting the heatsink fan

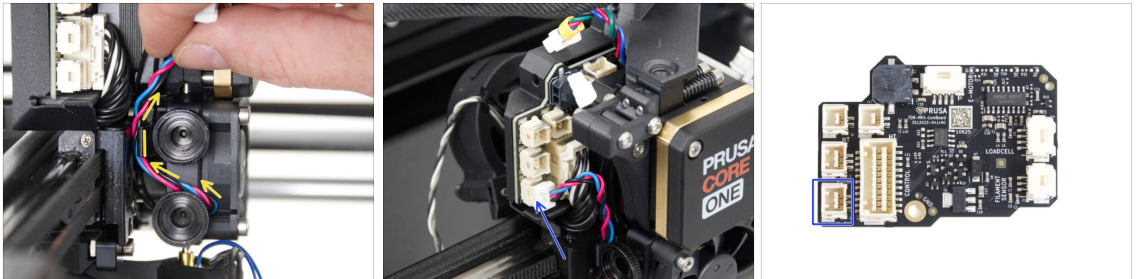




- 🟡 Route the heatsink fan cable above the lower thumb screw through the Cable-clip.
- 🟡 Connect it to the lowest connector on the LoveBoard.

PASSO 53 Connettere il termistore NTC

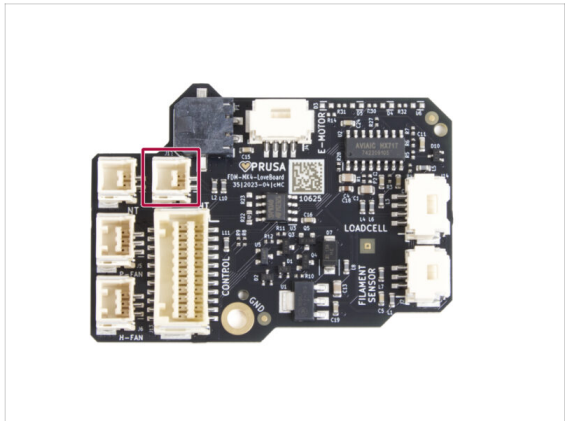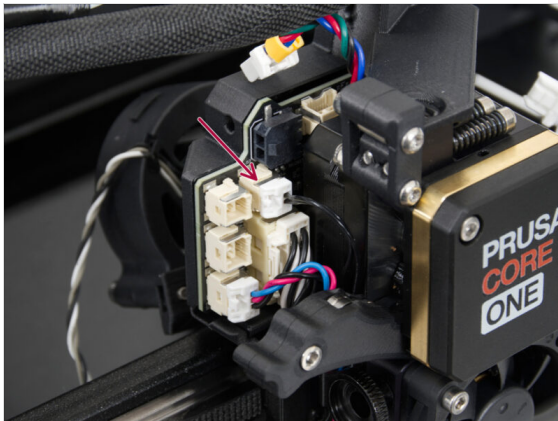


- Connect the NTC thermistor to the upper right connector.
- ① For better access, you can release the tensioning mechanism of the idler.

PASSO 54 Connettere la ventola di stampa

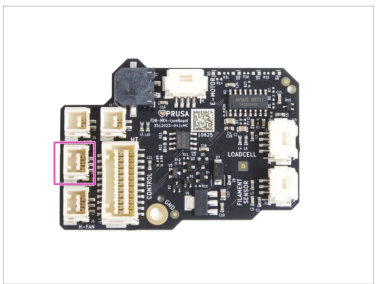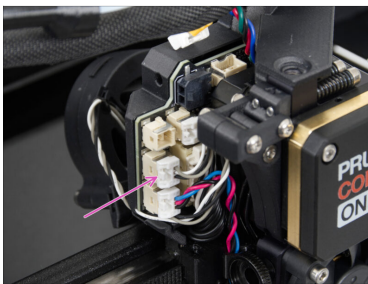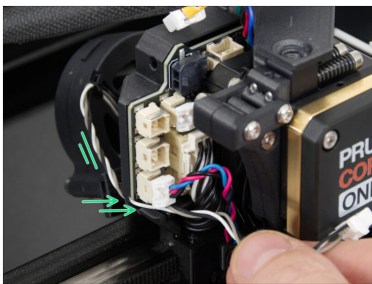


- Guide the print fan cable through the cable channel.
- The cable should **not be stretched too tightly**.
- Plug the print fan cable to the middle conenctor in the left row on the LovaBoard.

PASSO 55 Connecting the hotend cables and motor

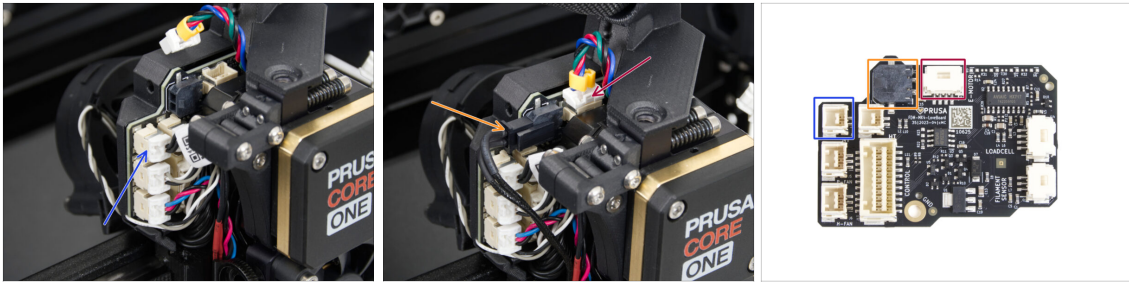


- Connect the hotend thermistor cable to the top connector in the left row.
- Connect the hotend heater cable to the black connector at the top.
- Connect the extruder motor cable (E) to the topmost connector.

PASSO 56 Guidare i cavi dell'hotend

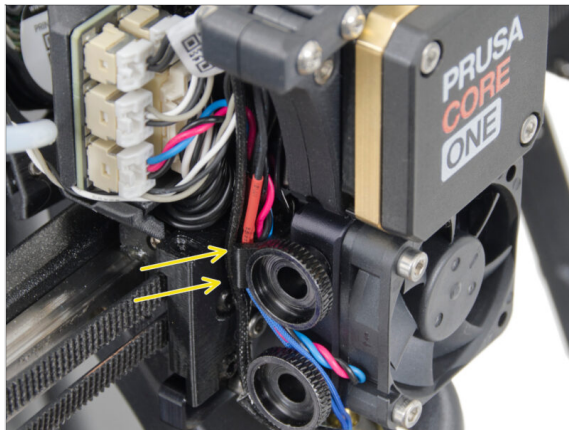


- Hook both hotend cables into the Cable-clip.
- Hook the thermistor cable first, followed by the heater cable.

PASSO 57 Wiring check

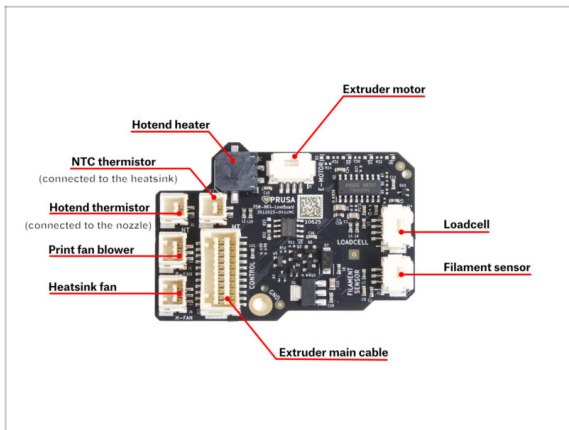

Before closing the Nexttruder electronics, perform a final inspection according to the wiring diagram.

PASSO 58 Print-head-cover-left: parts preparation

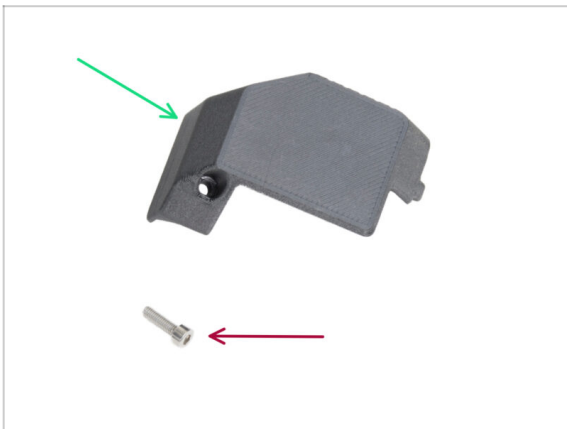

● Per i seguenti passi prepara:

- Printhead-cover-left (1x) you removed earlier
- M3x10 screw (1x) you removed earlier

PASSO 59 Covering the electronics - left side




- Place the Printhead-cover-left onto the left side of the Nextruder.
- Insert the tab into the opening first.
- Then secure the top of the cover using an M3x10 screw.

PASSO 60 Print-head-cover-right: parts preparation



- **Per i seguenti passi prepara:**
- Printhead-cover-right-lever (1x) *you removed earlier*
- M3x6 screw (2x) *you removed earlier*
- Fitting M4-5 (1x) *you removed earlier*

PASSO 61 Connecting the loadcell and FS

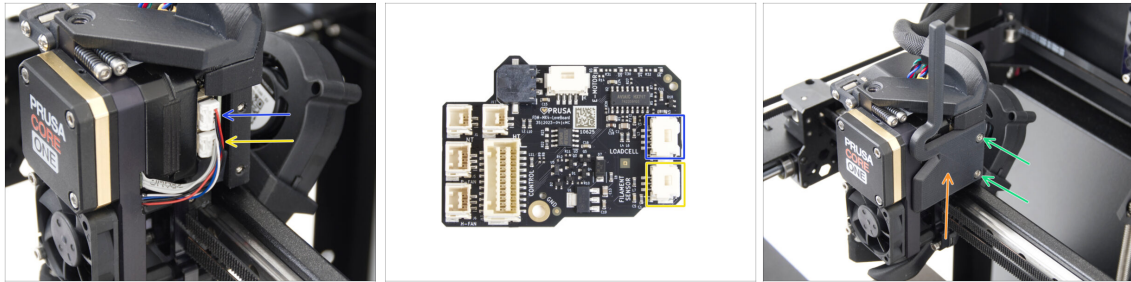

- Plug the Loadcell cable to the upper connector on the right side of the Nextruder.
- Plug the filaments sensor cable to the lower connector,
 - ❗ The connectors are keyed and cannot be mixed up.
- Posiziona la copertura con leva Printhead-cover-right-lever sul lato destro del Nextruder.
 - ⚠ Non schiacciare i cavi!
- Secure the cover with two M3x6 screw.

PASSO 62 Installing the fitting



- Insert the fitting M4-5 to the heatsink.
- Using the universal wrench, tighten the fitting firmly.

PASSO 63 Collegare il tubo in PTFE




- ➡ Push the free end of the removed PTFE tube into the fitting. Push it all the way down.
- ➡ Slide the Bowden-tube down to cover the fitting.
- ➡ After connecting the cables, verify the routing against the reference image. Make sure the PTFE tube is **not twisted** and it's routed correctly.

PASSO 64 Almost there...




- 🛠 **Congratulations!** You have successfully replaced the belts.
- 🛠 Continue to the **next chapter**.

4. Heatbed upgrade

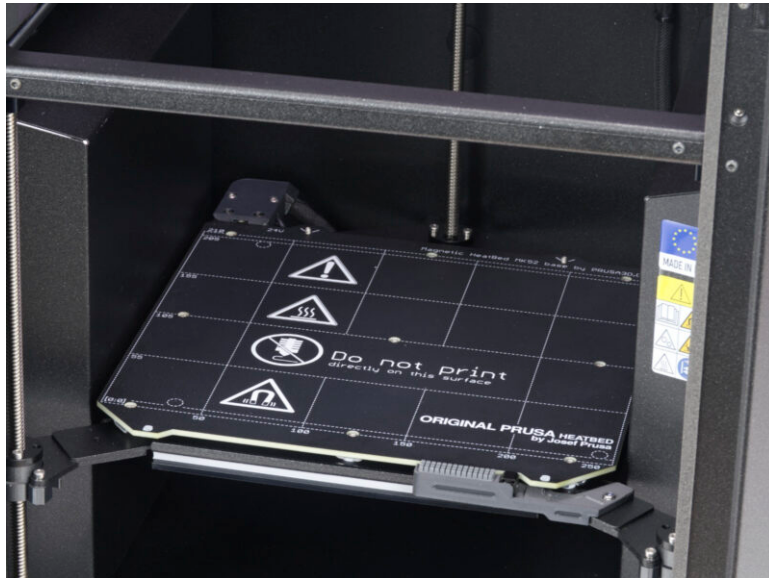


PASSO 1 Tools

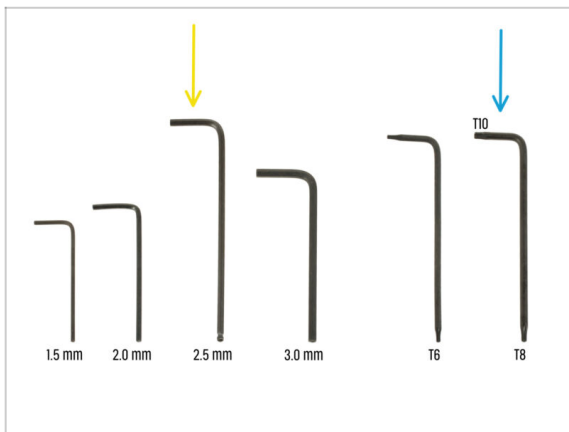

Tools necessary for this chapter:


- 2.5mm Allen key
- T10 key/screwdriver

PASSO 2 Loosening the heatbed

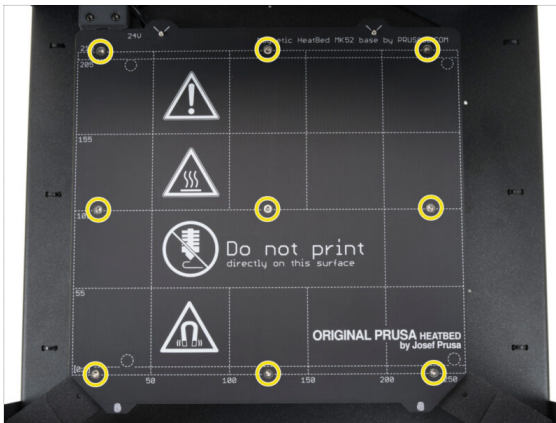

- Using a T10 screwdriver, loosen and remove all nine countersunk screws securing the heatbed.
- Move the Nextruder all the way to the front.

PASSO 3 Aprire il piano riscaldato

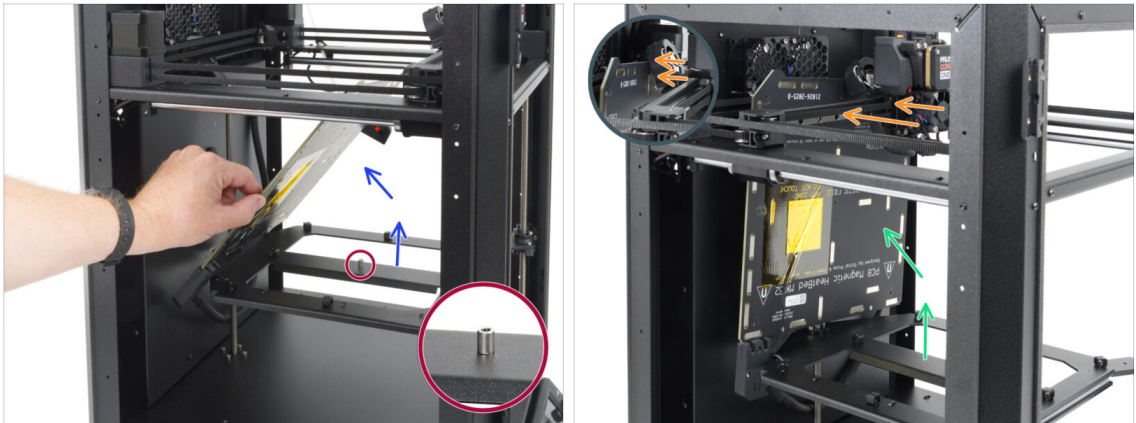


- Allontana il piano riscaldato dal carrello Z.
- Remove the heatbed spacer under the heatbed and discard it to avoid mixing it up with the new one.
- Appoggia il piano riscaldato contro la parte posteriore della stampante.
- Sposta il Nextruder verso il piano riscaldato e bloccalo con la ventola di stampa per evitare che si inclini verso il basso.

PASSO 4 Removing old expansion joints



- Using a 2.0 mm Allen key, slightly loosen the M3x4r screw securing the expansion joint on the Z-carriage.
- Fai scivolare il giunto di espansione fuori dalla vite.
- Rimuovi la vite M3x4r.
- Procedi allo stesso modo per gli altri giunti di espansione.

PASSO 5 New expansion joints: parts preparation

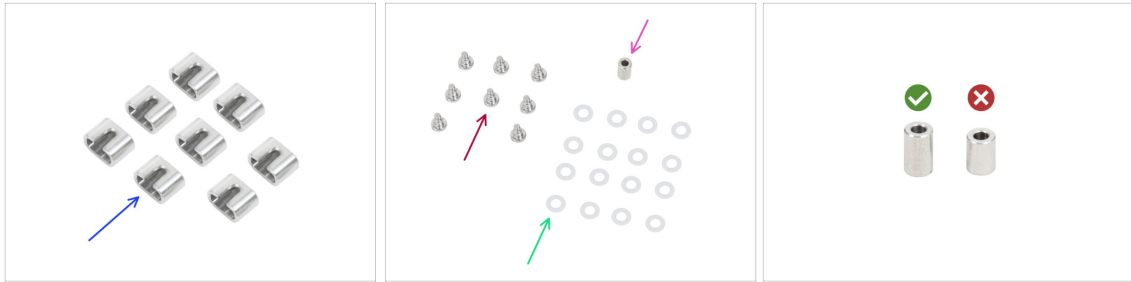


Per i seguenti passi prepara:

- New expansion joint (8x)
- Expansion joint screw (8x)
- PTFE washer M3 (16x)
- Heatbed spacer 10 mm (1x)



Do not confuse the new heatbed spacer with the old one. They look similar, but the **new spacer is longer**.

PASSO 6 Installazione delle viti per i giunti di espansione

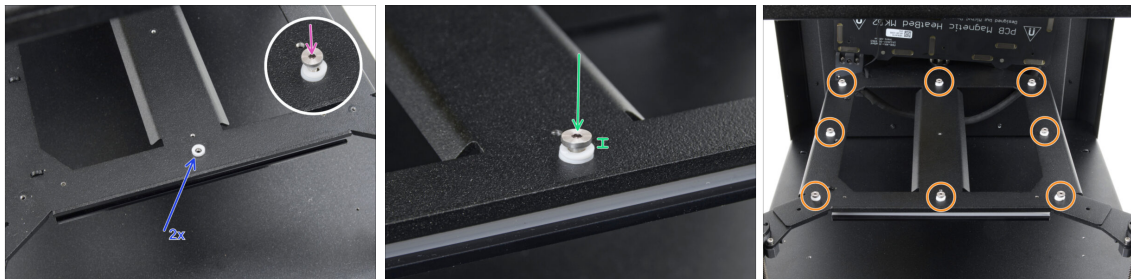


- Place the **two** PTFE washers on top of each other in the front threaded hole of the Z-carriage.
- Insert the expansion joint screw through the washers into the threaded hole.
- Stringi bene la vite, ma senza esagerare.
- i Una volta serrata la vite, assicurati di lasciare uno spazio tra le rondelle e la testa della vite.
- Proceed the same for the rest of the threaded holes.

PASSO 7 Installazione dei nuovi giunti di espansione




- Fai scivolare il nuovo giunto di espansione, con la scanalatura rivolta verso il basso, sulla vite **tra** le rondelle in PTFE.
- Posiziona il giunto di espansione in modo che la **scanalatura sia rivolta nella direzione opposta al carrello Z**.
- Repeat this process for all remaining expansion joints.
- ❗ La posizione finale verrà regolata seguendo questi passaggi.

PASSO 8 Inserting the heatbed spacer

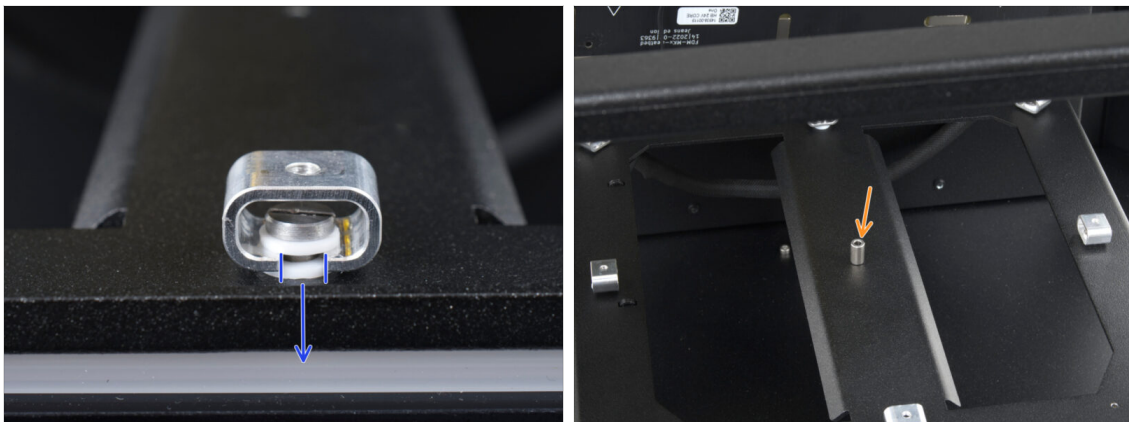


- Double-check that all expansion joints are oriented correctly and that the grooves are facing outward.
 - Posiziona il **nuovo** distanziatore da 10 mm per il piano riscaldato nel foro filettato al centro del carrello Z.
- 📌 Se stai assemblando la Prusa INDX insieme all'aggiornamento GEN 2, **torna all'articolo adesso**.

PASSO 9 Viti del Piano riscaldato: preparazione componenti

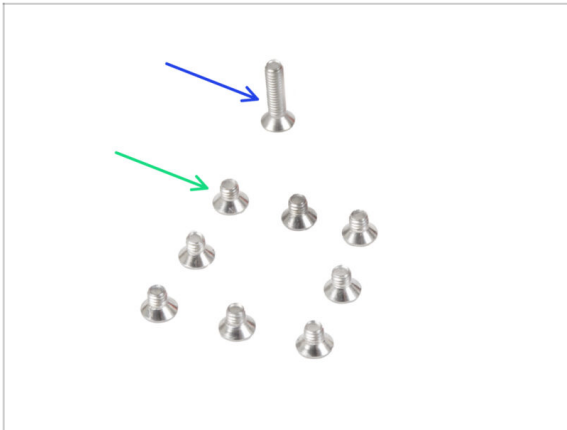


- Per i seguenti passi prepara:
- M3x14cT countersunk screw (1x)
- M3x4cT countersunk screw (8x)

PASSO 10 Securing the heatbed

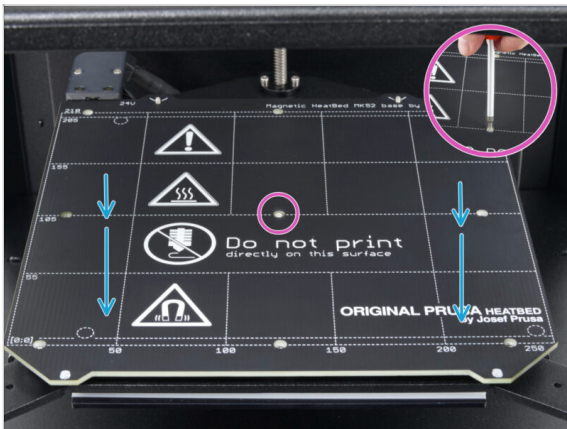

- Place the heatbed on the expansion joints and align the mounting holes.
- Inserisci la vite a testa svasata M3x14cT attraverso il distanziatore del piano riscaldato nel foro centrale e serralala leggermente.

PASSO 11 Allineatore per giunti di espansione

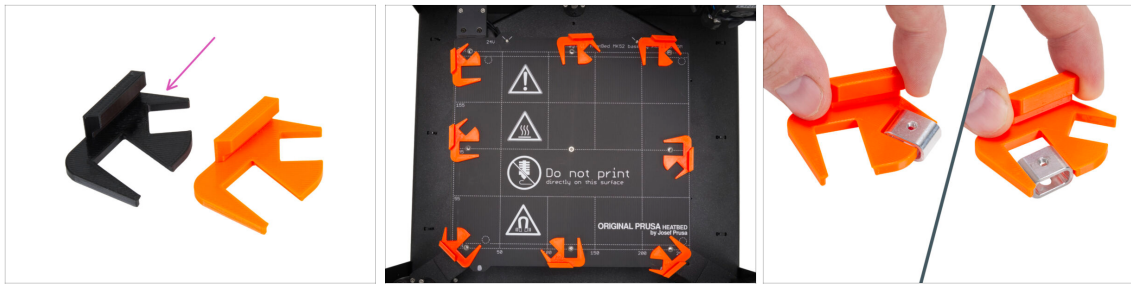

- ◆ Prepara l'allineatore **Expansion-joint-aligner** per i passaggi seguenti.
- ❗ Il tuo pacchetto include la **versione nera**. In questa guida è mostrata la versione arancione per una maggiore visibilità.
- ⬛ Nei passaggi seguenti, allineerai con precisione ciascun giunto di espansione.
- ⬛ For reference, see the second image showing the simplified aligner orientation for a single expansion joint.
- ⬛ The third image shows the alignment tool being slid onto the expansion joint for reference.
- ❗ The expansion joint is shown outside the printer for clarity. During alignment, it is installed under the heatbed.

PASSO 12 Aligning the front side expansion joint




- ◆ Insert the M3x4cT screws into **all eight holes** around the heatbed. Tighten each screw by **one turn only**.
- ⬛ Inizia allineando il **giunto di espansione centrale sul lato anteriore**.
- ❗ Use the symbols on the heatbed as a reference.
- ◆ Slide the straight fork onto the expansion joint and push the Expansion-joint-aligner against the heatbed. This will align the expansion joint.
- ◆ Spingi con decisione l'allineatore contro il bordo del piano riscaldato.
- ◆ Stringi la vite, ma solo un po'.

PASSO 13 Aligning the front left expansion joint



- Move to the **left corner**.
- Slide the straight fork onto the expansion joint and push the Expansion-joint-aligner against the heatbed. This will align the expansion joint.
- Spingi con decisione l'allineatore contro il bordo del piano riscaldato.
- Stringi la vite, ma solo un po'.

PASSO 14 Allineamento del giunto di espansione sul lato sinistro

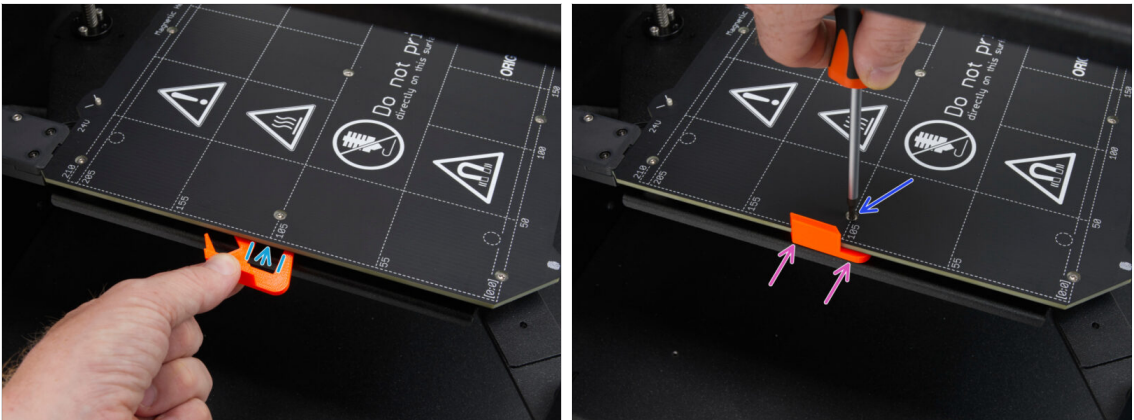


- Spostati sul **lato sinistro** del piano riscaldato.
- Fai scorrere la chiave a forcella sul giunto di espansione e spingi l'allineatore Expansion-joint-aligner contro il piano riscaldato. In questo modo il giunto di espansione verrà allineato.
- Spingi con decisione l'allineatore contro il bordo del piano riscaldato.
- Tighten the screw, but just lightly.

PASSO 15 Aligning the rear left expansion joint



- Move to the **rear left corner**.
- Fai scorrere la **parte angolata** della chiave a forcilla sul giunto di espansione e spingi l'allineatore Expansion-joint-aligner contro il piano riscaldato. In questo modo il giunto di espansione verrà allineato.
- Spingi con decisione l'allineatore contro il bordo del piano riscaldato.
- Tighten the screw, but just lightly.


PASSO 16 Allineamento del giunto di espansione posteriore centrale

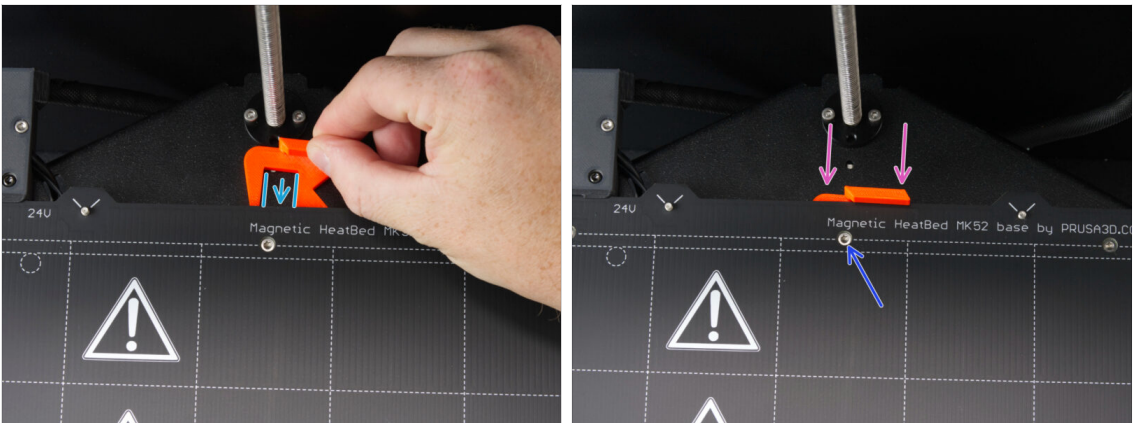

- Continue with the **middle rear** expansion joint.
- Slide the straight fork onto the expansion joint and push the Expansion-joint-aligner against the heatbed. This will align the expansion joint.
- Spingi con decisione l'allineatore contro il bordo del piano riscaldato.
- Tighten the screw, but just lightly.


PASSO 17 Disconnecting the Nextruder cables - left side

PASSO 18 Aligning the rear right expansion joint

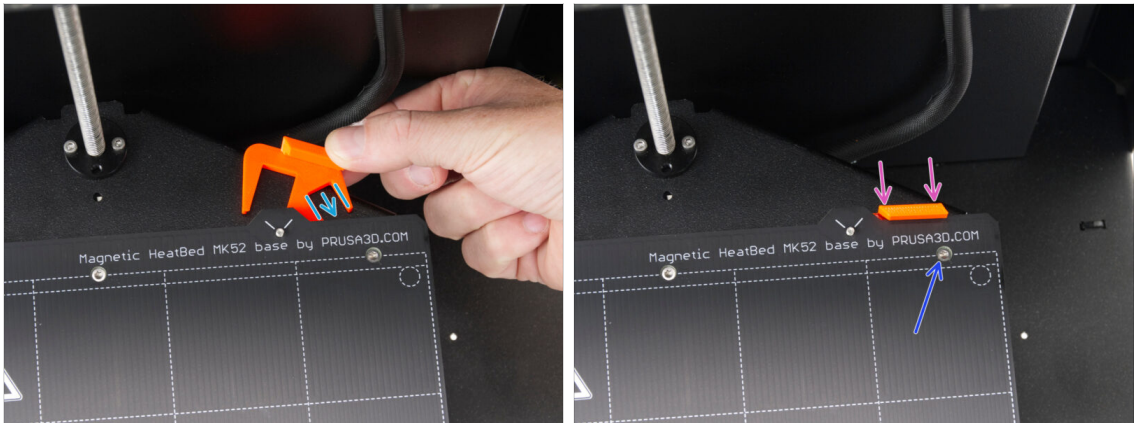

- Continua con l'**angolo posteriore destro**.
- Fai scorrere la **parte angolata** della chiave a forcilla sul giunto di espansione e spingi l'allineatore Expansion-joint-aligner contro il piano riscaldato. In questo modo il giunto di espansione verrà allineato.
- Spingi con decisione l'allineatore contro il bordo del piano riscaldato.
- Tighten the screw, but just lightly.

PASSO 19 Aligning the right side expansion joint

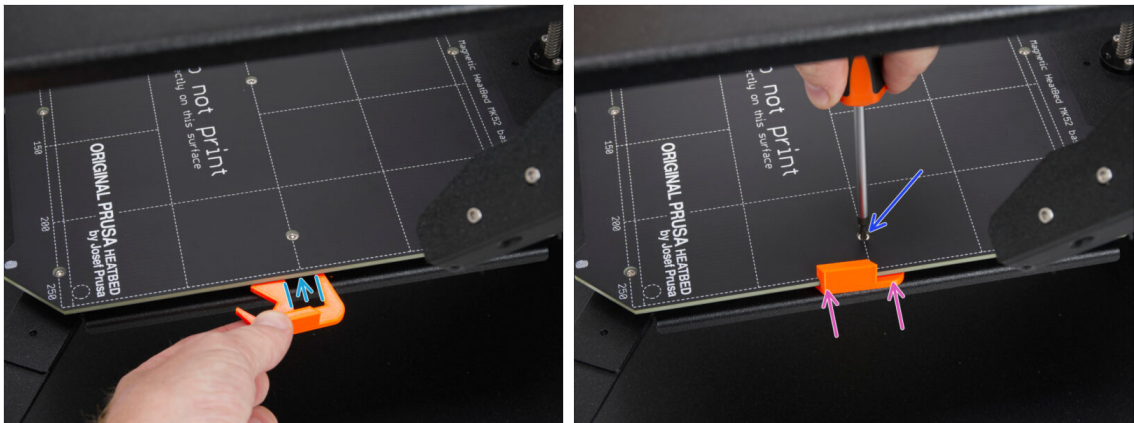



- Spostati sul **lato destro** del piano riscaldato.
- Fai scorrere la chiave a forcilla sul giunto di espansione e spingi l'allineatore Expansion-joint-aligner contro il piano riscaldato. In questo modo il giunto di espansione verrà allineato.
- Spingi con decisione l'allineatore contro il bordo del piano riscaldato.
- Tighten the screw, but just lightly.

PASSO 20 Allineamento del giunto di espansione anteriore destro



- Continua con l'**angolo anteriore destro**.
- Slide the straight fork onto the expansion joint and push the Expansion-joint-aligner against the heatbed. This will align the expansion joint.
- Spingi con decisione l'allineatore contro il bordo del piano riscaldato.
- Tighten the screw, but just lightly.

PASSO 21 Fissare il piano riscaldato

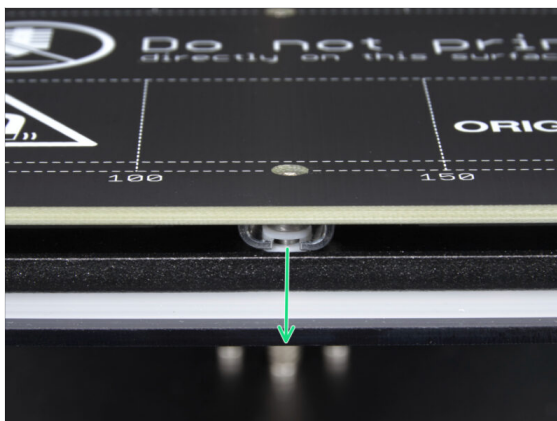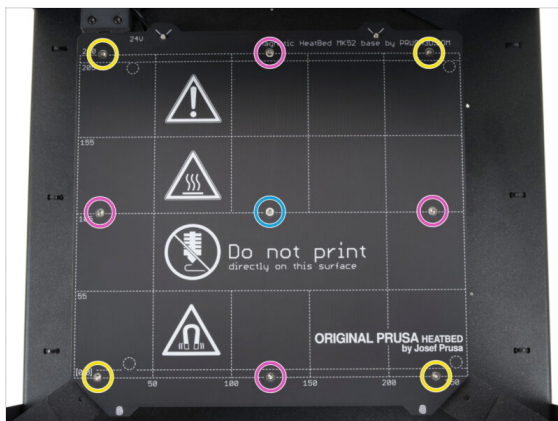

! IMPORTANTE: il piano riscaldato va avvitato seguendo un ordine preciso. Ripeti la sequenza più volte, assicurandoti di dare un ultimo giro di avvitamento dopo almeno due giri.

● Dopo aver posizionato tutte le viti, stringile in questa sequenza:

- Vite centrale
- Prime quattro viti (bordi)
- Ultime quattro viti (angoli)

● Stringi le viti delicatamente, ma con decisione.

● Controlla bene che il giunto di espansione non si sia ruotato e che la scanalatura sia rivolta verso l'esterno della stampante.



Se stai assemblando la Prusa INDX insieme all'aggiornamento GEN 2, **torna all'articolo adesso.**


PASSO 22 Nozzle wiper assembly: parts preparation



● Per i seguenti passi prepara:


- Nozzle-wiper-holder (1x)
- Raschietto dell'ugello (1x)
- dado M3n (1x)
- Vite M3x6r (1x)
- M3x10 screw (1x)
- Giunto di espansione (1x) *che hai rimosso prima*

PASSO 23 Assemblare il raschietto dell'ugello

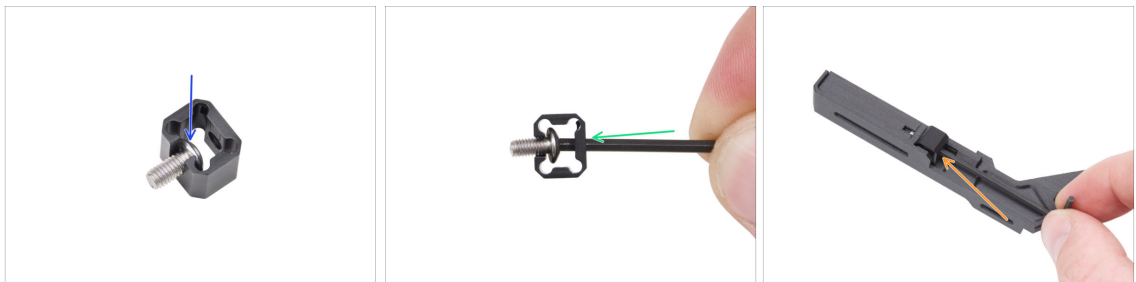


- Inserisci la vite M3x6r nel giunto di espansione con la testa della vite rivolta verso l'interno.
- Insert a 2.0 mm Allen key through the threaded hole to reach the screw.
- Fissa il giunto di espansione al supporto Nozzle-wiper-holder e stringi la vite. Non stringere troppo.

PASSO 24 Montaggio del raschietto dell'ugello

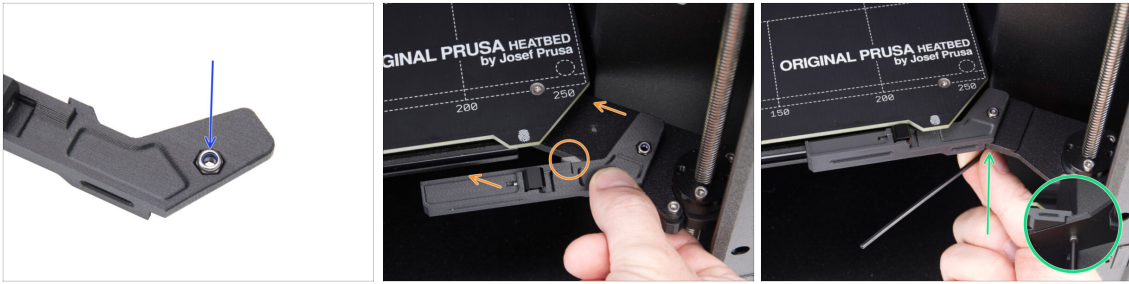


- Insert the M3nN nut into the hexagonal opening.
- Place the Nozzle-wiper-holder onto the right side of the Z-carriage.
- Slide the Nozzle-wiper-holder along the Z-carriage onto the heatbed assembly.
 - Tieni d'occhio quella piccola linguetta sul supporto. Deve agganciarsi dietro il bordo della piastra sotto il piano riscaldato.
- Push the assembly firmly against the heatbed and secure it from the underside of the Z-carriage using the M3x10 screw.

PASSO 25 Sticking the wiper pad

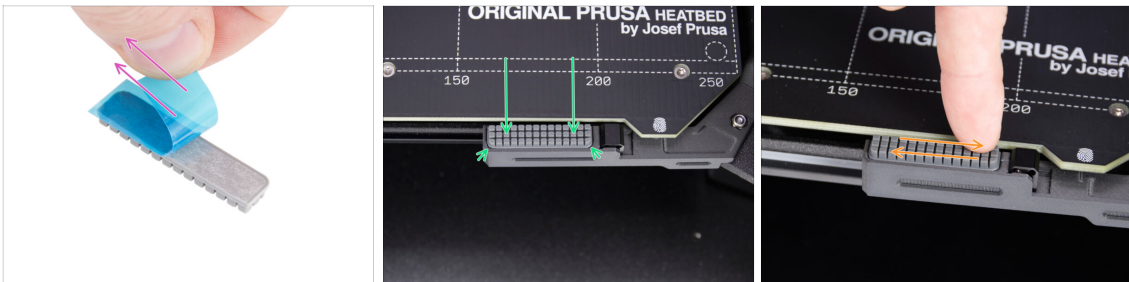

- Stacca la pellicola protettiva dal raschietto dell'ugello.
 - ① **The pad is adhesive** underneath the protective layer. Avoid touching the adhesive surface.
- Inserisci il raschietto nell'apposita cavità del gruppo del pulitore ugello.
 - 📌 Note that the pad has **rounded corners** on one side. Match them to the shape of the recess.
- Run your finger over the entire surface of the nozzle wiper pad several times to ensure it is evenly adhered and fully seated.


PASSO 26 Right metal sheet: parts preparation

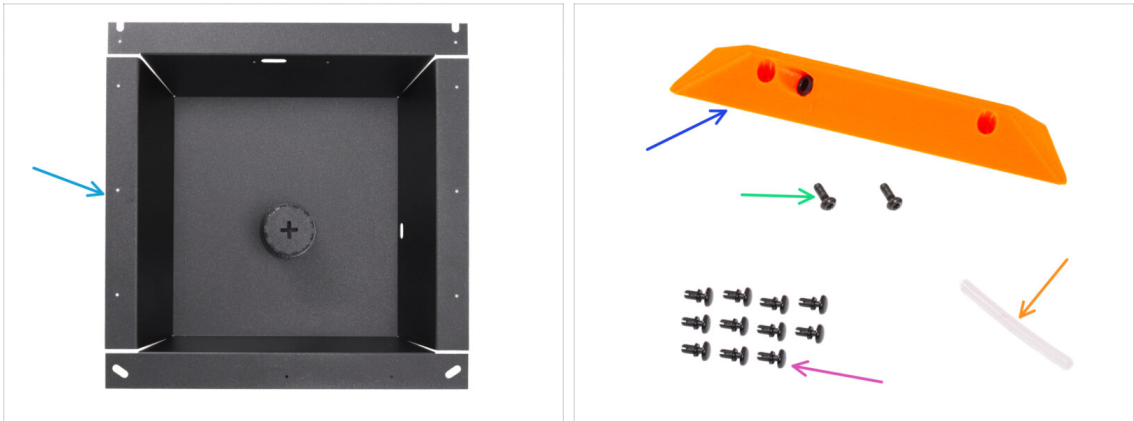

● Per i seguenti passi prepara:

- Right side sheet metal (1x) *you removed earlier*
- Side-handle (1x) *you removed earlier*
- Vite M3x8rT (2x) *rimosse in precedenza*
- PTFE tube 4 x 2.5 x 45 mm (1x) *you removed earlier*
- Nylon rivet (11x) *you removed earlier*

PASSO 27 Preparing the right metal sheet

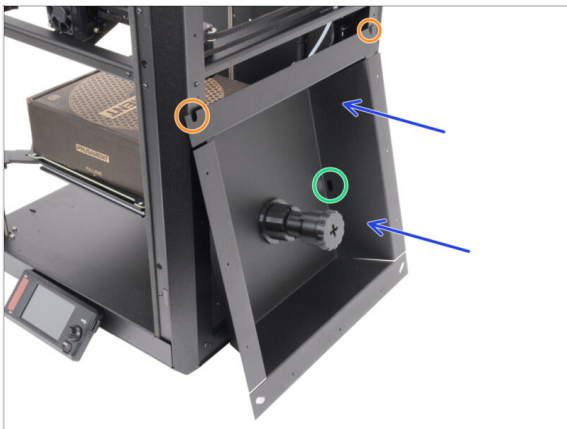

- Carefully lean the right side sheet against the printer.
- The U-shaped cutouts must face upward.
- The oval opening must be on the right side of the sheet.

PASSO 28 Attaching the handle and FS




- ✦ Insert an M3x8rT screw through the left hole in the side handle.
- ⬛ Place the side handle against the opening in the side panel and align it.
- ✦ Fai passare la vite attraverso il pannello.
- ✦ Dal lato opposto, allinea il sensore del filamento laterale con la vite.
- ✦ Place the filament sensor onto the screw and tighten it.

PASSO 29 Securing the side filament sensor



- ✦ Allinea il sensore del filamento laterale con il secondo foro di montaggio.
- ✦ Secure it using an M3x8rT screw inserted through the side handle.

PASSO 30 Mounting the right metal sheet

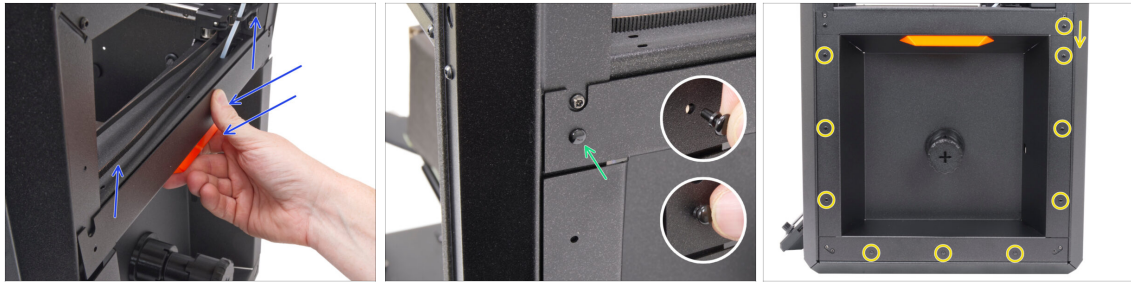


- Gently press the metal sheet against the printer frame while sliding it upward.
- Seat it in place and secure it with a nylon rivet in the upper-left corner.
 - Allinea i fori.
 - Inserisci il rivetto in nylon nel foro e spingilo leggermente verso l'interno.
 - Poi premilo con decisione finché non è ben inserito.
- Con lo stesso metodo, continua con i restanti dieci fori. Inizia dall'alto.

PASSO 31 Inserimento tubo in PTFE




- Individua il colletto nero all'interno dell'impugnatura laterale.
- Fully insert the PTFE tube into the side handle.

PASSO 32 Pannello laterale destro: preparazione dei componenti

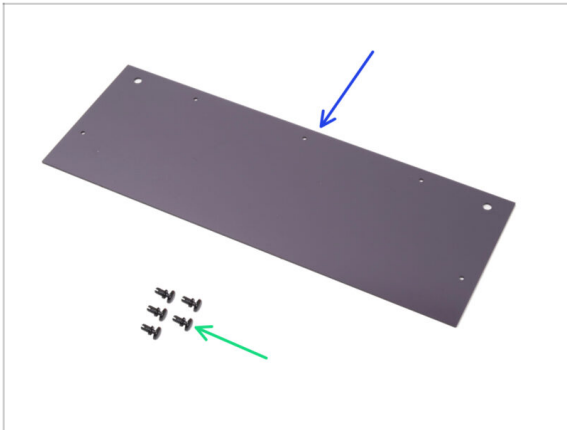



- Per i seguenti passi prepara:
- Pannello laterale (1x) *che hai rimosso prima*
 - Rivetto in nylon (5x) *che hai rimosso prima*

PASSO 33 Installare il pannello laterale destro

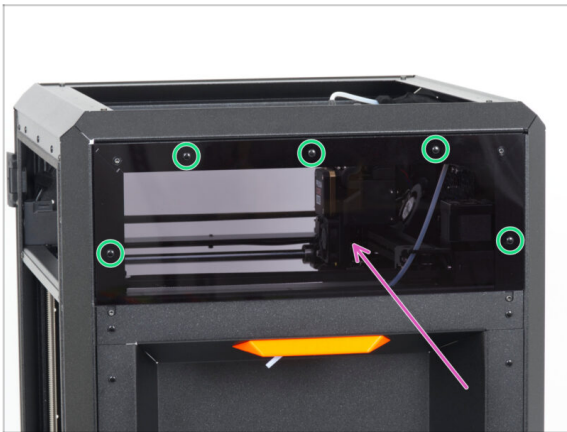

- Place the side panel on the right side of the printer above the metal sheet.
- Fissalo con cinque rivetti in nylon.

PASSO 34 Lato sinistro: preparazione dei componenti

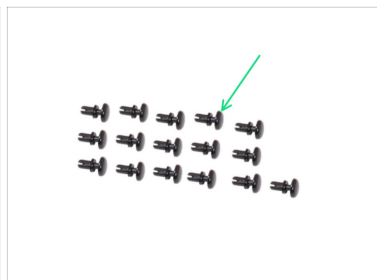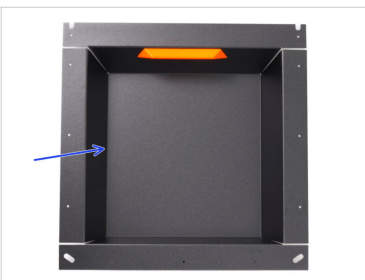


- Per i seguenti passi prepara:
- Left side metal sheet (1x) *you removed earlier*
 - Pannello laterale (1x) *che hai rimosso prima*
 - Nylon rivet (16x) *you removed earlier*

PASSO 35 Installazione dei pannelli del lato sinistro




- ✦ Insert the left side metal sheet into the printer frame from the left side.
- ✦ Secure it using eleven nylon rivets.
- ✦ Posiziona il pannello laterale sopra la piastra laterale.
- ✦ Fissalo con cinque rivetti in nylon.

PASSO 36 Connettere i cavi del motore

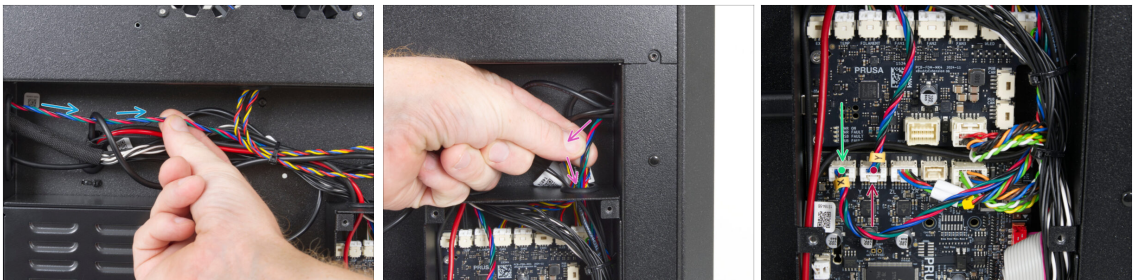

- ✦ Vai sul retro della stampante.
- ✦ Tira delicatamente il cavo del motore posteriore destro indietro verso la centralina. **Smetti di tirare se senti resistenza.**
- ✦ Gently pull the left rear motor cable back towards the electronics. **Stop pulling if you feel resistance.**
- ✦ Connect the **left** motor cable (X motor) to the left connector. It is labeled X on the board.
- ✦ Collega il cavo del motore **destro** (motore Y) al connettore destro. Sulla scheda è contrassegnato con la lettera Y.


PASSO 37 Copertura xBuddy: preparazione dei componenti

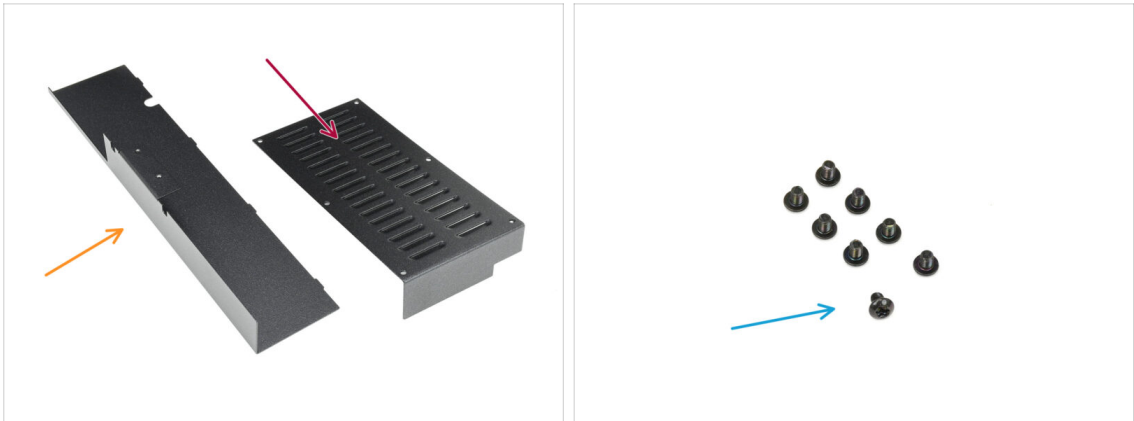

● Per i seguenti passi prepara:

- Piastra di copertura posteriore (1x) si trova nella confezione *Metal parts 2/3*
- Copertura xBuddy (1x) si trova nella confezione *Metal parts 3/3*
- Vite M3x4rT (8x)

PASSO 38 Coprire la scheda xBuddy

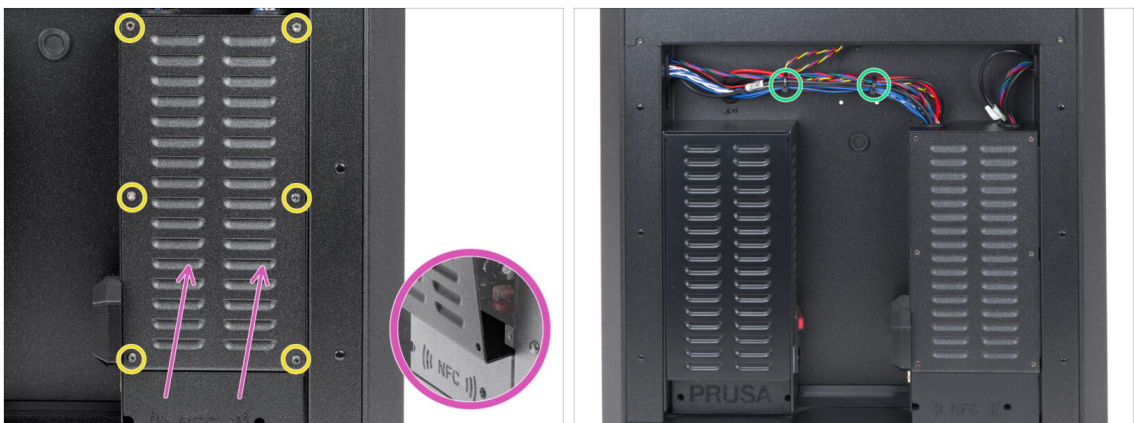


- Coprire con cura la scatola xBuddy facendo scorrere la parte piegata del coperchio all'interno della scatola.
- Evita di schiacciare i cavi e assicurati che la copertura sia inserita parallela alla scheda xBuddy.
- Fissa la copertura della scatola xBuddy con le sei viti M3x4rT.
- Avvolgi due fascette intorno al fascio di cavi nella parte superiore per tenerli in ordine e ben fissati.
- ✂ Taglia con attenzione la parte in eccesso; fai attenzione a non tagliare i cavi.

PASSO 39 Coprire i cavi



- Allinea la copertura posteriore in piastra in modo che i cavi possano passare attraverso la piattaforma.
- Spingi la copertura posteriore verso la stampante, poi spostala verso l'alto.
- Assicurati che la copertura del cavo si inserisca nelle quattro aperture presenti sul coperchio posteriore della stampante.
- Dall'interno della stampante, fissa la copertura posteriore utilizzando due viti M3x4rT dall'interno della stampante.

PASSO 40 Pannello dello sportello: preparazione dei componenti

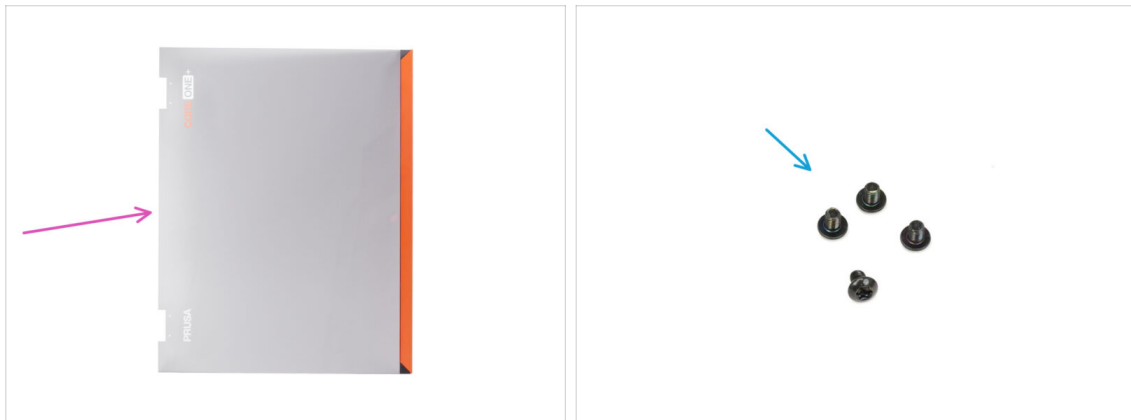

- **Per i seguenti passi prepara:**
- Pannello sportello (1x) *rimosso in precedenza*
- M3x5rT screw (4x) *you removed earlier*

PASSO 41 Installazione del pannello dello sportello



⚠ Assicurati che il pannello dello sportello sia orientato correttamente, in modo che il logo PRUSA CORE One+ sia visibile dall'esterno della stampante quando lo sportello è chiuso.


- ✎ Fai scivolare i ritagli del pannello dello sportello di nuovo sui cardini.
- 🔩 Fissa il pannello dello sportello avvitando due viti M3x5rT in ciascuna cerniera.
- ⚠ **Non serrare eccessivamente le viti** per evitare di danneggiare il pannello dello sportello.

PASSO 42 Installare la copertura superiore




- 🔵 Allinea il coperchio con la cornice metallica nell'angolo all'estrema destra.
- 🟠 Allinea anche la copertura con l'incavo nella parte anteriore
- ✎ Fissa la copertura in posizione utilizzando due rivetti di nylon nelle aperture contrassegnate.

PASSO 43 Done

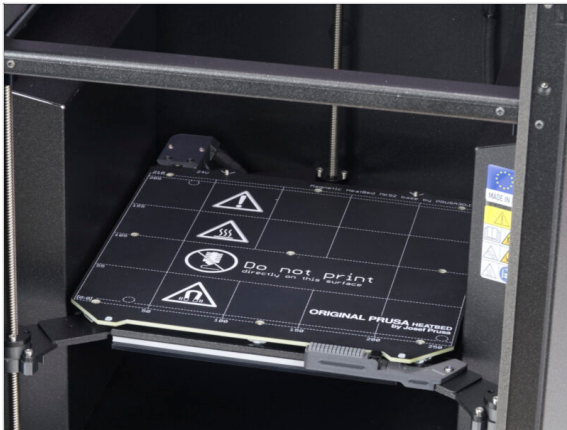


- ◆ **Congratulazioni!** Hai appena completato l'aggiornamento del piano riscaldato.
- ◆ Now, proceed to the **final chapter**.

5. Preflight check

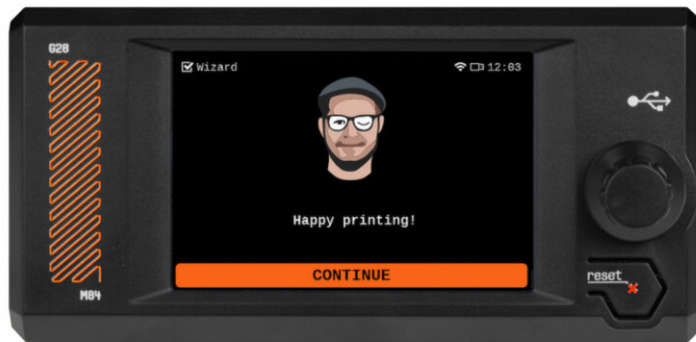

PASSO 1 Print Sheet

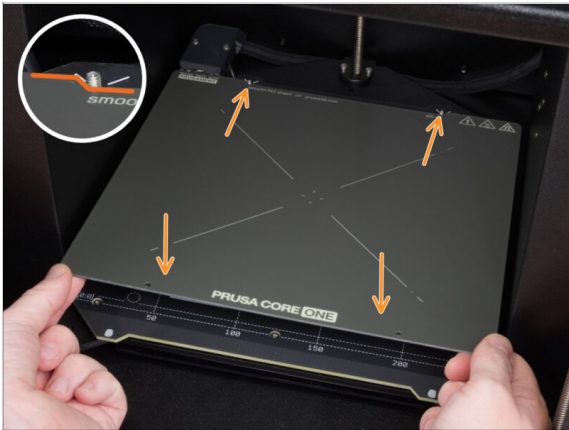

- Riposiziona la piastra di stampa.

⚠ **Assicurati che non ci sia nulla sul piano riscaldato.** Il piano riscaldato deve essere pulito in quanto lo sporco può danneggiare la superficie del piano riscaldato e della piastra di stampa.

- **Attach the sheet by first aligning the rear cutout with the locking pins on the back of the heated bed.** Hold the sheet by the front two corners and slowly lay it down onto the heated bed - **watch your fingers!**
 - Keep the print sheet clean for optimum performance.
 - #1 cause of prints detaching from the print surface is a greasy print sheet. Use IPA (Isopropyl alcohol) to degrease it if you have touched its surface before.

PASSO 2 Belt tensioning



i Questo capitolo ti guiderà nella calibrazione e nella preparazione della stampante per il suo primo utilizzo. Iniziando con la tensione delle cinghie:

Orange hexagon The left screw adjusts the upper belt.

Pink hexagon The right screw adjusts the lower belt.



Black hexagon Double-check that the **M3x30 screws in the belt tensioners were lubricated** during assembly.

Warning icon **WARNING: Incorrect procedure may result in damage to plastic parts or seizing of screws. Before adjusting the belt tension, read the dedicated article:**

Black hexagon **Adjusting belt tension (CORE One)**

Pushpin icon Do not forget to come back here after adjusting the belts.

PASSO 3 Firmware Download

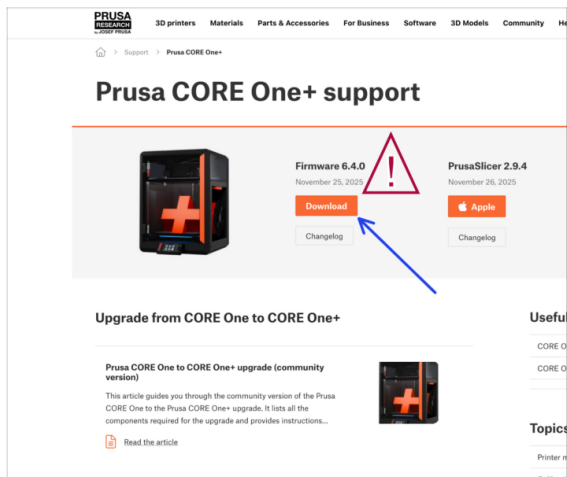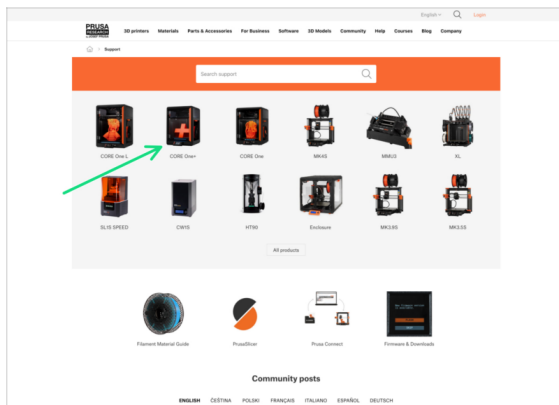

- ◆ Dovremo aggiornare il firmware.
 - ① The CORE One+ requires firmware version 6.4.0 or newer.
- ◆ Visit the CORE One+ support page on help.prusa3d.com.
- ◆ Download the latest firmware file (.bbf).
Save the file onto a USB drive.

PASSO 4 Firmware Flash



- ◆ Inserisci nella stampante la chiavetta USB con il file del firmware.
- ◆ Connect the power cable.
- ◆ Turn the printer on using the switch on the back.
- ◆ Once the "New firmware available" screen appears, select the **FLASH** option.

PASSO 5 Selftest



- Dopo aver completato l'aggiornamento, ti consigliamo di visitare il menu **Controllo -> Calibrazioni e test** ed eseguire l'Autotest dall'inizio.

PASSO 6 Finish



- 📌 Congratulazioni! La tua CORE One+ aggiornata è pronta per partire!

- **Happy printing!**

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across the entire width of the page, providing a guide for writing. The background is a clean, solid white color. There are no margins, text, or other markings present on the sheet.

[illegible]

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across the entire width of the page, providing a guide for writing. The background is a clean, solid white color. There are no margins, text, or other markings present on the sheet.

