

# Table of Contents

|  |    |
|--|----|
| <b>1. Introduction</b>   | 5  |
| Step 1 - General information   | 6  |
| Step 2 - What awaits you during the unpacking                        | 6  |
| Step 3 - Tools in the package  | 7  |
| Step 4 - Labels guide  | 7  |
| Step 5 - Cheatsheet  | 8  |
| Step 6 - Silicone sock   | 8  |
| Step 7 - CAUTION: Lubricant Handling                                 | 9  |
| Step 8 - View high resolution images                                 | 9  |
| Step 9 - We are here for you!  | 10 |
| <b>2. Printer unboxing</b>   | 11 |
| Step 1 - Introduction  | 12 |
| Step 2 - Opening the package   | 12 |
| Step 3 - Opening the package   | 13 |
| Step 4 - Removing the inserts  | 13 |
| Step 5 - Removing the inserts  | 14 |
| Step 6 - Removing the inserts  | 14 |
| Step 7 - Unpacking the printer                                       | 15 |
| Step 8 - Printer is ready for setup                                  | 15 |
| <b>3. Printer set up</b>   | 16 |
| Step 1 - Tools necessary for this chapter                            | 17 |
| Step 2 - Injection molded xLCD: parts preparation                    | 17 |
| Step 3 - Injection molded xLCD: xLCD cables                          | 18 |
| Step 4 - Injection molded xLCD: mounting the xLCD                    | 18 |
| Step 5 - xLCD: parts preparation                                     | 19 |
| Step 6 - Mounting the xLCD   | 19 |
| Step 7 - Mounting the xLCD   | 20 |
| Step 8 - Preparing the printer                                       | 20 |
| Step 9 - Nextruder cable: parts preparation                          | 21 |
| Step 10 - Nozzle seal versions                                       | 21 |
| Step 11 - Version C: preparing the dock                              | 22 |
| Step 12 - Guiding the nextruder cable                                | 22 |
| Step 13 - Attaching the first and second nextruder dock              | 23 |
| Step 14 - Dock inspection  | 23 |
| Step 15 - Dock inspection: video                                     | 24 |
| Step 16 - Third dock: screw removing                                 | 24 |
| Step 17 - Version C: Nozzle seal: parts preparation                  | 25 |
| Step 18 - Version C: Assembling the Nozzle seal                      | 25 |
| Step 19 - Version C: Installing the nextruder nozzle seal            | 26 |
| Step 20 - Wi-Fi antenna holder versions                              | 27 |
| Step 21 - Version A: Connecting the nextruder cables                 | 28 |
| Step 22 - Version A: Removing the XL buddy box cover                 | 28 |
| Step 23 - Version A: Connecting the Nextruder cables                 | 29 |
| Step 24 - Version A: Covering the XL buddy box                       | 29 |
| Step 25 - Version A: Guiding the PTFE tubes                          | 30 |
| Step 26 - Version A: Guiding the docks PTFE tubes                    | 30 |
| Step 27 - Version A: Installing the Wi-Fi antenna: parts preparation | 31 |
| Step 28 - Version A: Installing the Wi-Fi antenna                    | 31 |
| Step 29 - Version B: Wi-Fi antenna holder: parts preparation         | 32 |
| Step 30 - Version B: Installing the Wi-Fi antenna: antenna preparing | 32 |

|  |           |
|--|-----------|
| Step 31 - Version B: Installing the Wi-Fi antenna: antenna preparing ..... | 33        |
| Step 32 - Version B: Connecting the nextruder cables .....                 | 33        |
| Step 33 - Version B: Installing the Wi-Fi antenna holder .....             | 34        |
| Step 34 - Version B: Connecting the Nextruder cables .....                 | 34        |
| Step 35 - Version B: XL buddy box covering .....                           | 35        |
| Step 36 - Version B: Guiding the docks PTFE tubes .....                    | 35        |
| Step 37 - Version B: Guiding the PTFE tubes .....                          | 36        |
| Step 38 - Version B: Installing the Wi-Fi antenna: parts preparation ..... | 36        |
| Step 39 - Version B: Installing the Wi-Fi antenna .....                    | 37        |
| Step 40 - Spool holder assembly versions .....                             | 37        |
| Step 41 - Version A: Spool holder: parts preparation .....                 | 38        |
| Step 42 - Version A: Spool holder: left side .....                         | 38        |
| Step 43 - Version A: Assembling the spool holder .....                     | 39        |
| Step 44 - Version A: Mounting the spool holder assembly .....              | 39        |
| Step 45 - Version A: Spool holder: right side assembly .....               | 40        |
| Step 46 - Version B: Assembling the spool holder: parts preparation .....  | 40        |
| Step 47 - Version B: Assembling the spool holder: adjusting the nut .....  | 41        |
| Step 48 - Version B: Assembling the spool holder .....                     | 41        |
| Step 49 - Version B: Preparing the spool holder .....                      | 42        |
| Step 50 - Version B: Spool holder: left side assembly .....                | 42        |
| Step 51 - Version B: Spool holder: right side assembly .....               | 43        |
| Step 52 - Nextruder assembly: parts preparation .....                      | 43        |
| Step 53 - Docking the Nextruder .....                                      | 44        |
| Step 54 - Nextruder cable bundle assembly .....                            | 44        |
| Step 55 - Nextruder cable bundle assembly versions .....                   | 45        |
| Step 56 - Version A: Nextruder cable bundle assembly .....                 | 45        |
| Step 57 - Version B: Nextruder cable bundle assembly .....                 | 46        |
| Step 58 - Almost done! .....   | 46        |
| <b>5. First run .....</b>  | <b>47</b> |
| Step 1 - Before you start with Multi-Tool .....                            | 48        |
| Step 2 - Prusa Nextruder sock (Optional) .....                             | 48        |
| Step 3 - Nozzle seal height calibration .....                              | 49        |
| Step 4 - Nozzle seal height calibration .....                              | 49        |
| Step 5 - Preparing the printer .....                                       | 50        |
| Step 6 - Firmware update .....   | 50        |
| Step 7 - Wizard .....  | 51        |
| Step 8 - Wizard: Dock Position Calibration .....                           | 51        |
| Step 9 - Wizard: Loosen pin .....  | 52        |
| Step 10 - Wizard: Loosen screws .....                                      | 52        |
| Step 11 - Wizard: Lock the tool .....                                      | 53        |
| Step 12 - Wizard: Tighten the upper screw .....                            | 53        |
| Step 13 - Wizard: Tighten the lower screw .....                            | 54        |
| Step 14 - Wizard: Install pins .....                                       | 54        |
| Step 15 - Wizard: Dock successfully calibrated .....                       | 55        |
| Step 16 - Wizard: Loadcell test .....                                      | 55        |
| Step 17 - Wizard: Calibrate Filament Sensors .....                         | 56        |
| Step 18 - Wizard: Calibrate Filament Sensors .....                         | 56        |
| Step 19 - Calibration pin: parts preparing .....                           | 57        |
| Step 20 - Calibration pin: parts assembly .....                            | 57        |
| Step 21 - Wizard: Tool Offset Calibration .....                            | 58        |
| Step 22 - Wizard: Sheet install .....                                      | 58        |
| Step 23 - Wizard: Calibration pin installation .....                       | 59        |
| Step 24 - Wizard: Offset calibration done .....                            | 59        |
| Step 25 - Calibration pin .....  | 60        |

|   |           |
|---|-----------|
| Step 26 - It's done .....                           | 60        |
| Step 27 - Regular printer maintenance .....         | 61        |
| Step 28 - Quick guide for your first prints .....   | 61        |
| Step 29 - Printable 3D models .....                 | 62        |
| Step 30 - Prusa knowledge base .....                | 62        |
| Step 31 - Join Printables! .....                    | 62        |
| <b>Manual changelog Five-Head (Assembled) .....</b> | <b>63</b> |
| Step 1 - Version history .....                      | 64        |
| Step 2 - Changes to the manual (1) .....            | 64        |
| Step 3 - Changes to the manual (2) .....            | 65        |
| Step 4 - Changes to the manual (4) .....            | 65        |
| Step 5 - Changes to the manual (5) .....            | 66        |
| Step 6 - Changes to the manual (6) .....            | 66        |
| Step 7 - Changes to the manual (7) .....            | 67        |







# 1. Introduction




## STEP 1 General information

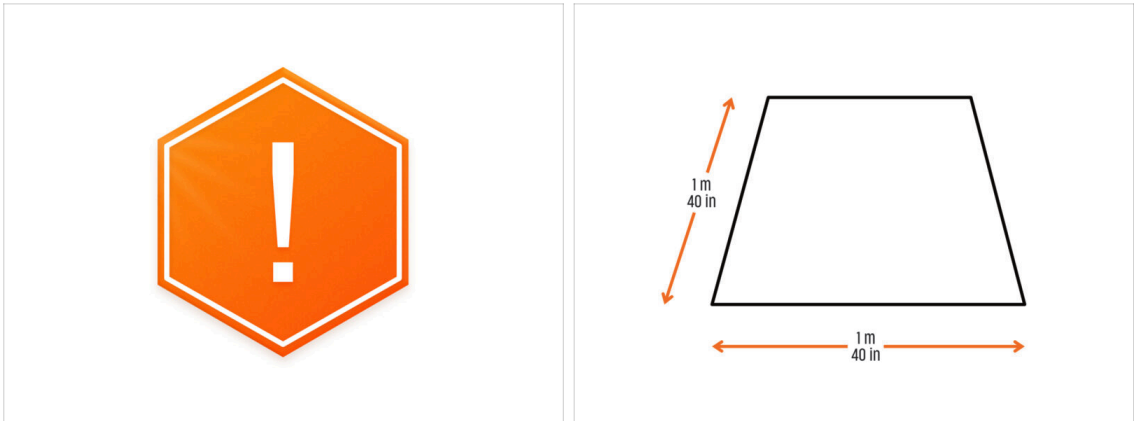


 **The package with the printer is heavy!** Always ask another person for help with handling.

- For the assembly, **prepare a clean workbench with a space of at least 1 m x 1 m (40 in x 40 in).**
- We recommend a **bright light above your workbench.** An inadequate light could make the assembly procedure much more difficult.

## STEP 2 What awaits you during the unpacking

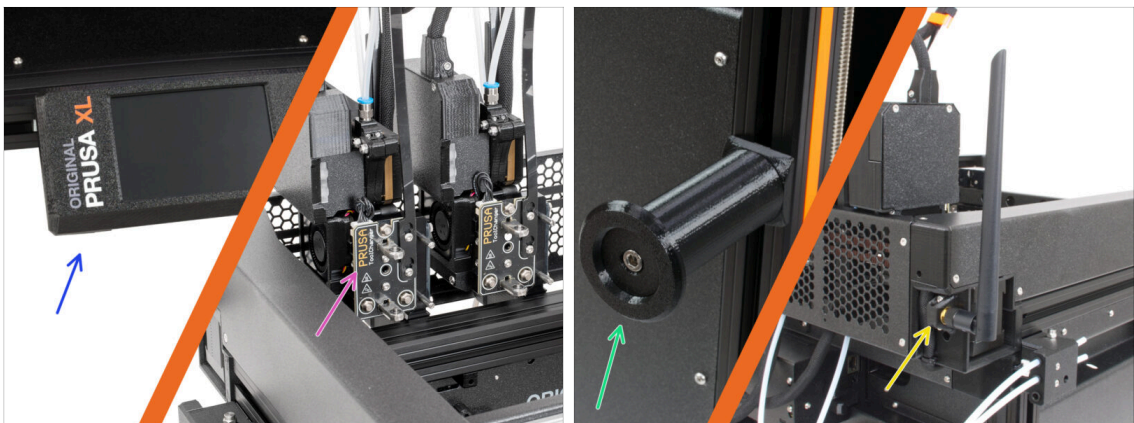


 Because of transportation, some of the fragile parts must be safely packed separately in the printer package. This manual will take you through the installation of these parts on the printer.

● **These parts will be installed:**

- xLCD assembly
- Multi-Tool nextruder assembly
- Spool holder
- Wi-Fi antenna

## STEP 3 Tools in the package

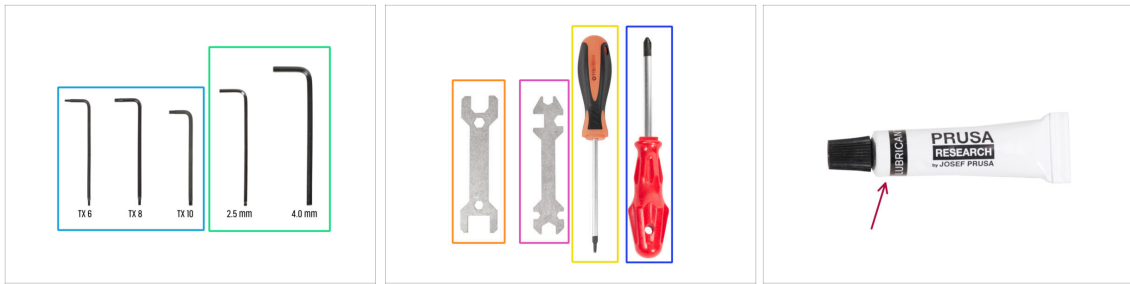

### ● The package includes:


① Some of the tools are intended primarily for regular printer maintenance. You might not need them for this manual. A list of the necessary tools is included at the beginning of each assembly chapter.

- Torx key TX6, TX8, TX10
- Allen key 2.5 mm, 4.0 mm
- Wrench 13-16
- Universal wrench
- T10 screwdriver
- Philips PH2 screwdriver

### ● The printer package contains lubricant, which is intended for **Regular printer maintenance**.


There is no need to apply it during the assembly.

## STEP 4 Labels guide

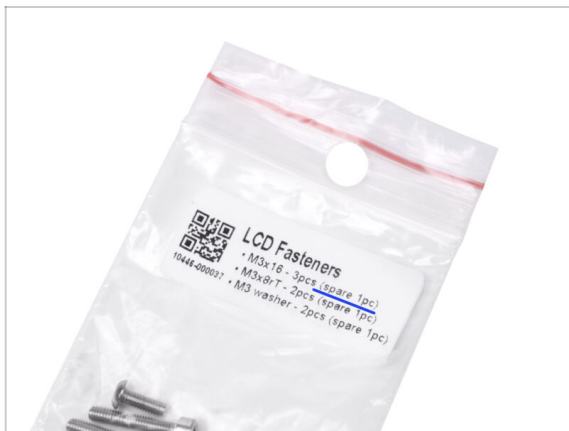

- All the boxes and bags that include parts needed for the build are labeled.
- The LCD Fasteners bag includes an extra spare of each part contained in the bag. The amount of spare parts is written on the label. This number is included in the total number of each type of part.

## STEP 5 Cheatsheet

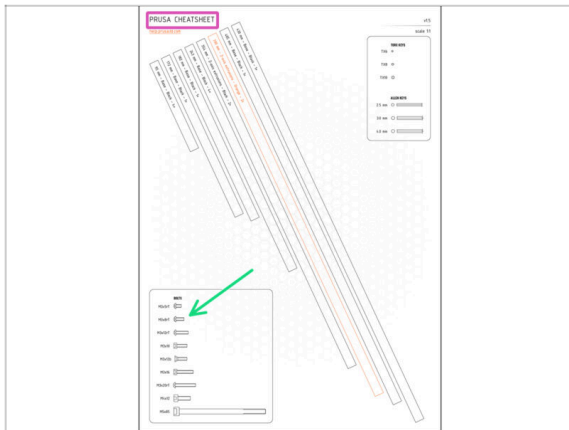



- ✦ Your package contains a letter, on the back of which is a Cheatsheet with drawings of all the necessary fasteners.
- ✦ The fasteners drawings are 1:1 scale, so you can compare the size by placing the fastener on the paper to make sure you are using the correct type.
- ① You can download it from our site [prusa.io/cheatsheet-xl](https://prusa.io/cheatsheet-xl). Print it at 100 %. Do not rescale it, otherwise it will not work.

## STEP 6 Silicone sock



- ✦ A silicone sock is supplied with each Nextruder package.
- ✦ The main function of a silicone sock is to keep the temperature in the heater block stable, which improves the printer's performance.
- ① Also, it keeps your hotend clean from filament debris and protects it in case the print detaches from the print surface.
- ✦ You will be asked to install the sock later in this guide.
- ① How to install the sock - [check the article](#).


## STEP 7 CAUTION: Lubricant Handling

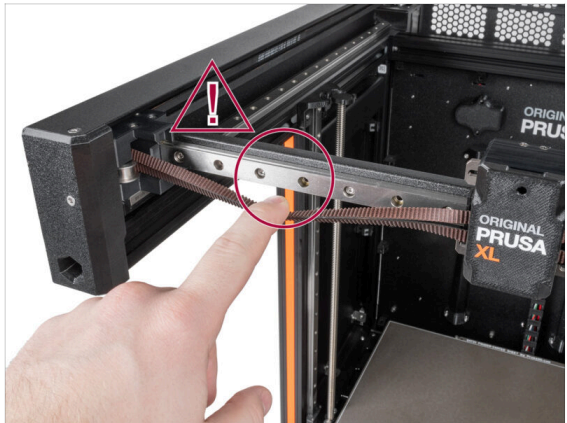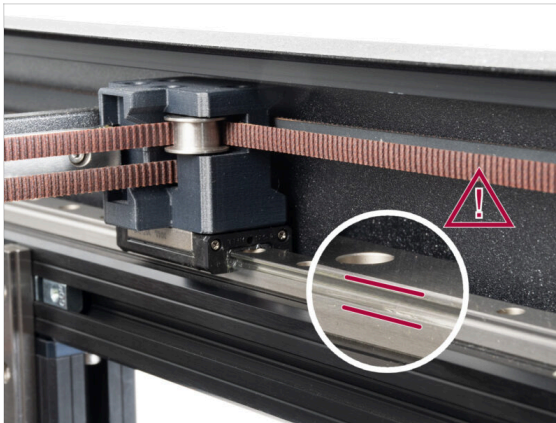

**⚠ CAUTION: Avoid direct skin contact with the lubricant used for the linear rails in this printer. If a contact occurs, wash your hands immediately. Especially before eating, drinking, or touching your face.**

- ◆ Lubricant accumulates in the printer's bearings, mainly in the linear rail channels.



## STEP 8 View high resolution images

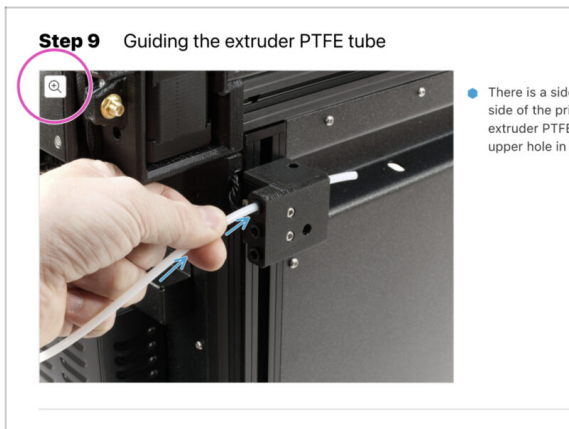

**i** When you browse the guide on [help.prusa3d.com](https://help.prusa3d.com), you can view the original images in high resolution for clarity.

- ◆ Just hover your cursor over the image and click the Magnifier button ("View original") in the top left corner.

### STEP 9 We are here for you!

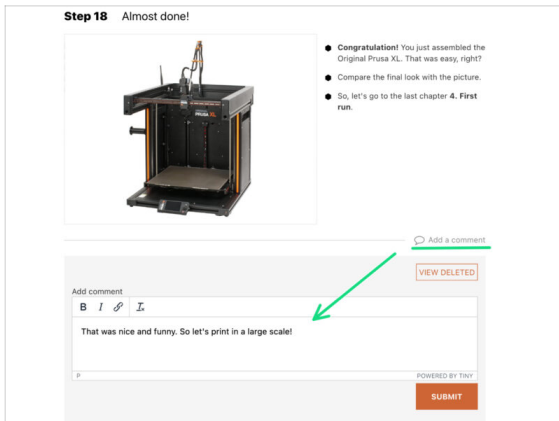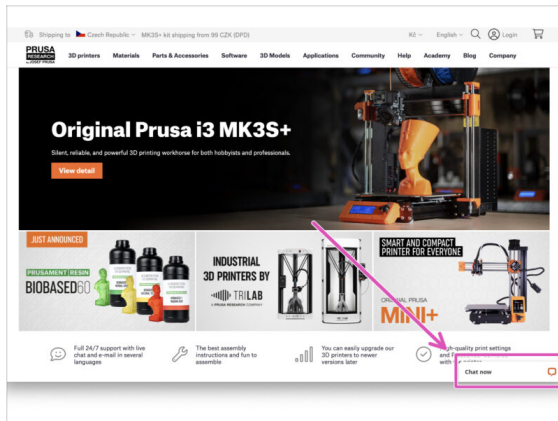




- Lost in the instructions? Missing screw or cracked printed part? **Let us know!**
- You can contact us using following channels:
  - Using comments under each step.
  - Using our 24/7 live chat at [shop.prusa3d.com](https://shop.prusa3d.com)
  - Writing an email to [info@prusa3d.com](mailto:info@prusa3d.com)
- Are you ready to get started on the assembly? Let's move on to chapter **2. Printer unboxing.**

## 2. Printer unboxing







### STEP 1 Introduction



-  **The printer package is heavy!** Ask someone to help you out.
-  **If children are involved, always supervise them to avoid injury.**
-  **We highly recommend that you keep all the packaging material** in case you decide to send the printer back for service.
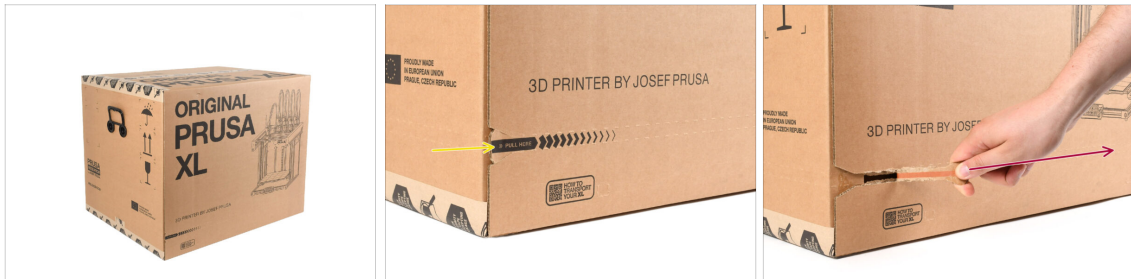
### STEP 2 Opening the package



-  Place the package on a stable surface. **Make sure the package is oriented top side up.** See the transportation label.
-  The package is equipped with a tear strip that splits the box in two parts.
-  Peel off the entire tear strip to split the box.



### STEP 3 Opening the package



- Remove the top part of the box by lifting it up.

⚠ Inside, there are cardboard inserts that contain parts necessary for the assembly.  
**Do not throw them out!**

### STEP 4 Removing the inserts




- Remove the top front cardboard insert. There are parts inside

⚠ **There are printer parts inside the top cardboard insert! Make sure not to lose them!**

- Remove the boxes on the side containing the nextruder parts.

- Remove the cardboard insert with the Haribos inside and the remaining nextruder boxes.

## STEP 5 Removing the inserts

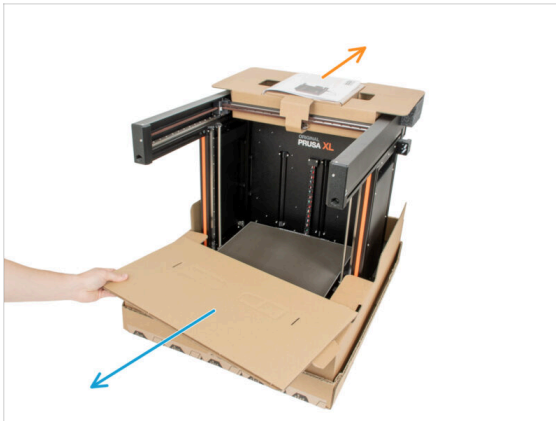

- Remove the front inner insert.
- Remove the welcome letter.
- Remove the box with Prusament on top.

## STEP 6 Removing the inserts



- There is a small cut-out in the top cardboard insert that locks it to the printer's frame. Pull it to unhook the insert.
  - While pulling the back part of the cardboard insert up, lift the whole insert and remove it.
- ⚠ **There are printer parts inside the top cardboard insert! Make sure not to misplace them!**

### STEP 7 Unpacking the printer



- Use the side handles on the printer to lift it up.
- ⚠ **Do not lift the printer by the top metal profiles!!!** Otherwise, you may warp the printer parts and damage the LED lighting inside.
- ⚠ **Do not handle the printer alone; it should be lifted by two people - one from each side.**
- Keep the bottom of the box in place by holding it down while you lift the printer up.

### STEP 8 Printer is ready for setup




- Good job! The printer is ready for the next chapter.
- Visit chapter 3. **Printer set up.**

### 3. Printer set up



## STEP 1 Tools necessary for this chapter

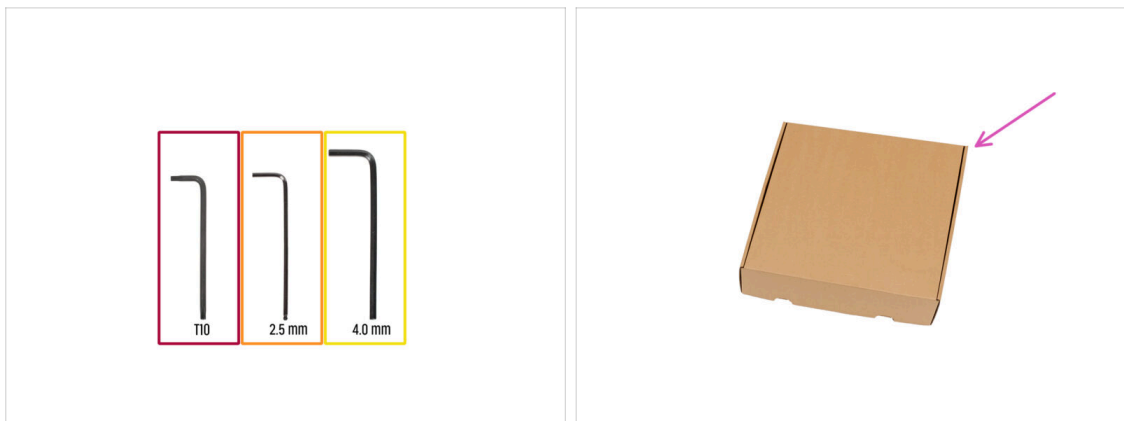

For this chapter, please prepare:

T10 Torx key

*i* You can also use a T10 screwdriver, which is included in the package

2.5 mm Allen key

4.0 mm Allen key

A cardboard box is to be used as heatbed protection during the setup. *Hint: you can use the Nextruder box shipped with your printer.*

## STEP 2 Injection molded xLCD: parts preparation



*i* Starting from September 2024, you may receive a new injection molded xLCD.


For the following steps, please prepare:

xLCD assembly (1x)

M3x10 screw (2x)

If you have an older version (printed) xLCD, continue to the step **xLCD: parts preparation**

### STEP 3 Injection molded xLCD: xLCD cables

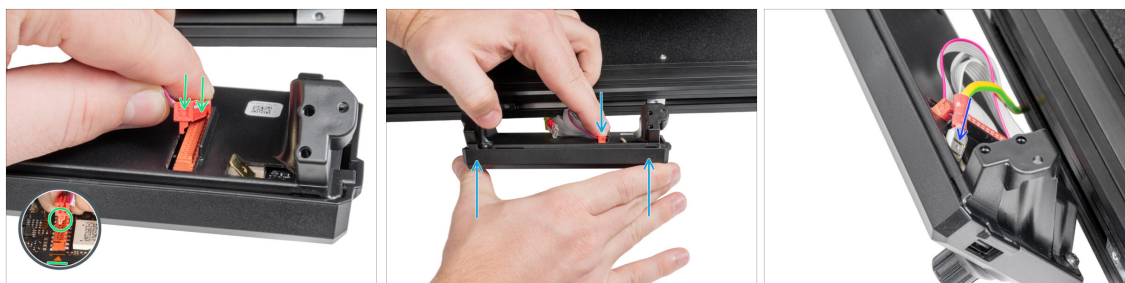

- Connect the xLCD cable to the slot on the xLCD board.
- ① There is a latch on the xLCD cable connector, which must be facing the triangle symbol on the board. See the picture.
- Push the xLCD cable connector to fully connect to the xLCD. Hold the xLCD cover.
- Push the grounding connector fully into the PE faston.

### STEP 4 Injection molded xLCD: mounting the xLCD



- Align the xLCD assembly with the nuts in the front aluminum extrusion.
- Insert and tighten the M3x10 screw from the right side of the xLCD.
- Insert and tighten the M3x10 screw from the left side of the xLCD.
- xLCD is ready.


## STEP 5 xLCD: parts preparation



● For the following steps, please prepare:

- xLCD assembly (1x)
- M3x16 screw (2x)

## STEP 6 Mounting the xLCD

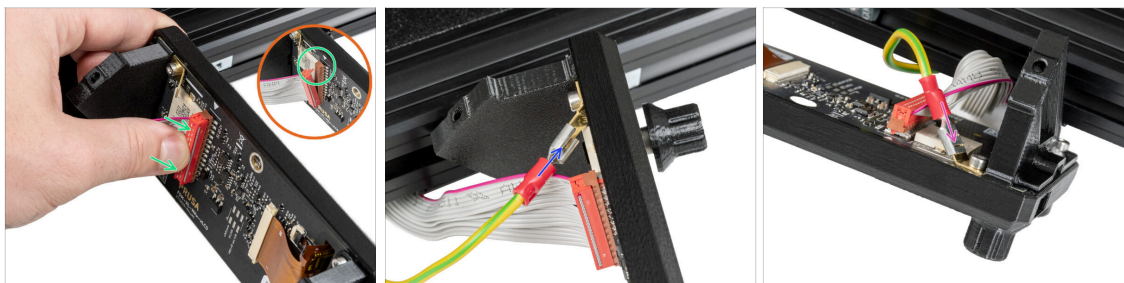

- Carefully turn the printer so that the front side is facing you.
- From the front of the printer, place the xLCD assembly close to the lower front aluminum extrusion where are the xLCD cables.
- Connect the xLCD cable to the slot on the xLCD board.
  - ① There is a latch on the xLCD cable connector, which must be facing the triangle symbol on the board. See the detail.
- Connect the grounding cable and connect it to the PE connector on the xLCD.
- Push the grounding connector fully into the PE faston.



## STEP 7 Mounting the xLCD



- Align the xLCD assembly with the profile nuts (M3nEs) in the front aluminum extrusion.
- ① Profile nuts (M3nE) are already installed in the aluminum profile by Prusa production department.
- Insert and tighten the M3x16 screw from the left side of the xLCD.
- Insert and tighten the M3x16 screw from the right side of the xLCD.

## STEP 8 Preparing the printer



- ⚠ **Reminder: To handle the printer, **always grab the handles on both sides of the printer**. Do not lift the printer by the aluminum extrusions or the metal sheet profiles on top.**
- ① In the following steps, we will work with tools and install an extruder above the heatbed.
- Place the empty cardboard box to the front center part of the heatbed.
- Manually move the X-axis assembly all the way to the front side of the printer.
- Manually move the X-carriage approximately to the center of the X-axis.



## STEP 9 Nextruder cable: parts preparation




**i** From April 2025, you may receive a new cable bundle. The difference is described before the cable bundle is connected to the Nextruder.

■ **For the Nextruder cable bundle assembly please prepare:**

■ Cable bundle (5x)

## STEP 10 Nozzle seal versions

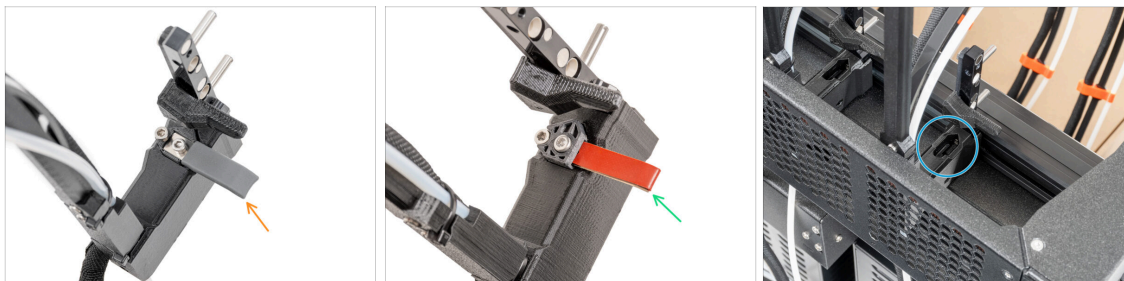

**i** The latest assemblies come with the nozzle seal pre-installed on the extruder dock.

■ To confirm this, examine one of the extruder docks closely and compare it to the pictures to see if the nozzle seal is already in place with the square nut.

■ Version A: grey nozzle seal.

■ Version B: red nozzle seal.

**i** If your printer has version A or version B, skip to this step: **Guiding the Nextruder cable**

■ Version C: dock without the nozzle seal - **continue to the next step**

## STEP 11 Version C: preparing the dock




● **Repeat this step for all tool heads:**

● Insert the M3nS nut into the nextruder dock.

● Push the nut into the nextruder dock. Use the Allen key to push the nut all the way into the dock.

ⓘ If you didn't find the nut, there is a spare one in the Nozzle Seal Assembly package.

## STEP 12 Guiding the nextruder cable

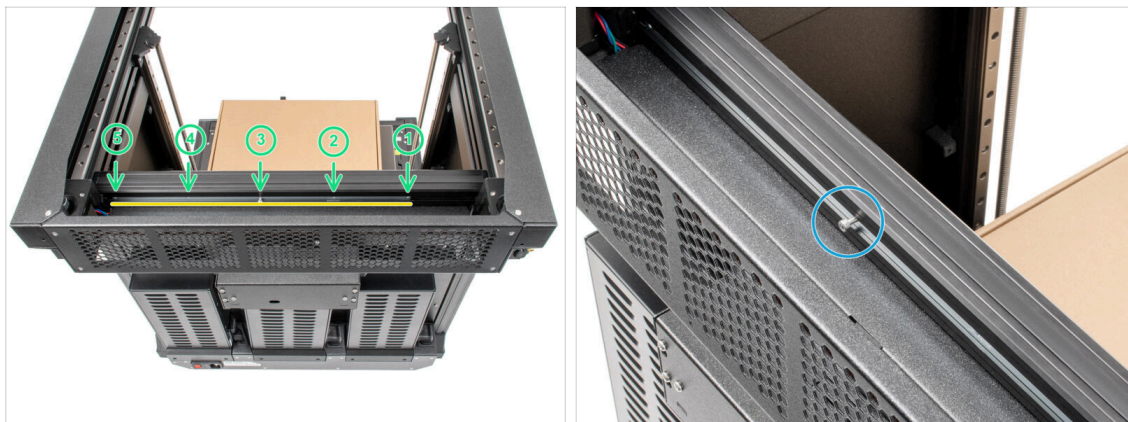

● Carefully rotate the printer 180° so that the PSU (Power Supply Unit) side is facing you.

● Locate the long metal profile with five M3 holes inside the rear aluminum extrusion.

● We will use all M3 holes in the metal profile.

● Locate a screw in the long metal profile which is fixing the part during transport.  
**Keep the screw in the metal profile for now.**


⚠ **Maintain the position of the long metal profile for the next step. It must not move!**  
If the metal profile moves, then push it all the way to the left and fix it in position with the screw.

## STEP 13 Attaching the first and second nextruder dock



- ① This step is the same for all versions of the dock assembly.
- Take the cable bundle.
- Place the xl-dock-cable-router on the bottom metal sheet below the aluminum extrusion.
- Locate the protruding screw from the xl-dock-cable-router. Attach the screw to the first M3 hole in the long metal profile (tch-mounting-insert). Check through the hole in the rear if the cable holder is lined up with the hole.
- Push the 2.5 mm Allen key all the way through the hole in the rear metal sheet until you reach the **middle** screw in the xl-dock-cable-router and tighten the screw.
- ⚠ **The dock is a press fit, the screw MUST be tightened firmly.**
- ① Repeat this step for the second tool head.

## STEP 14 Dock inspection

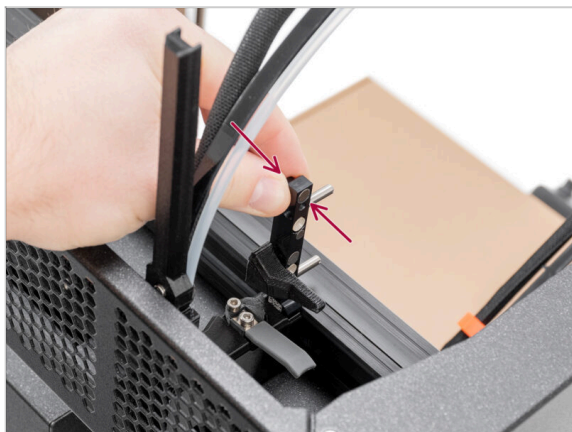

- ① This step is the same for all versions of the dock assembly.
- ⚠ Check that the dock is properly tightened. **The dock must not move.**
- ⚠ **The dock is a press fit, the screw must be tightened firmly.**
- Please watch the video in the next step for a better understanding.

## STEP 15 Dock inspection: video




- ① This step is the same for all versions of the dock assembly.
- ⬢ The following instructions need to be done correctly and carefully. Achieve better understanding and successful assembly by watching the video alongside the guide.

## STEP 16 Third dock: screw removing



- ① This step is the same for all versions of the dock assembly.
- ① At this point you should have already installed two docks.
- Locate the M3 screw in the metal insert.
- Using a 2.5mm Allen key, remove the screw from the metal insert.
- ⬢ Attach the **third, fourth and fifth** dock the same way as a first dock.
- ① **The dock is a press fit, so the screw needs to be tightened very hard.**
- The attached docks have to look like in the picture
- ⬢ Good job! Now let's install the nozzle seal - version C.

## STEP 17 Version C: Nozzle seal: parts preparation

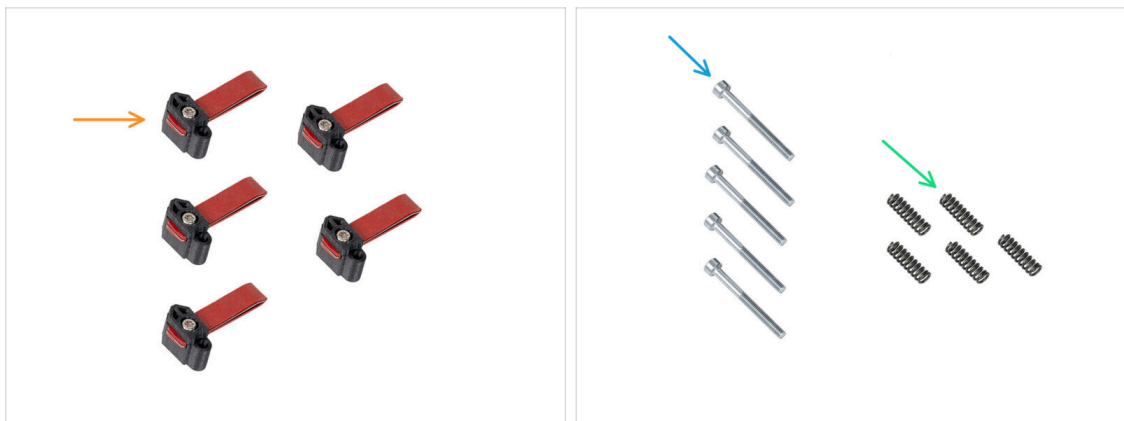


● The following instructions are intended only for printers without pre-installed nozzle seals. If your printer came with the nozzle seals installed on the Nextuder docks, go to **Wi-Fi antenna holder versions**.

● For the following steps, please prepare:

- Nozzle seal (5x)
- M3x30 screw (5x)
- Spring 15x5 (5x)

## STEP 18 Version C: Assembling the Nozzle seal

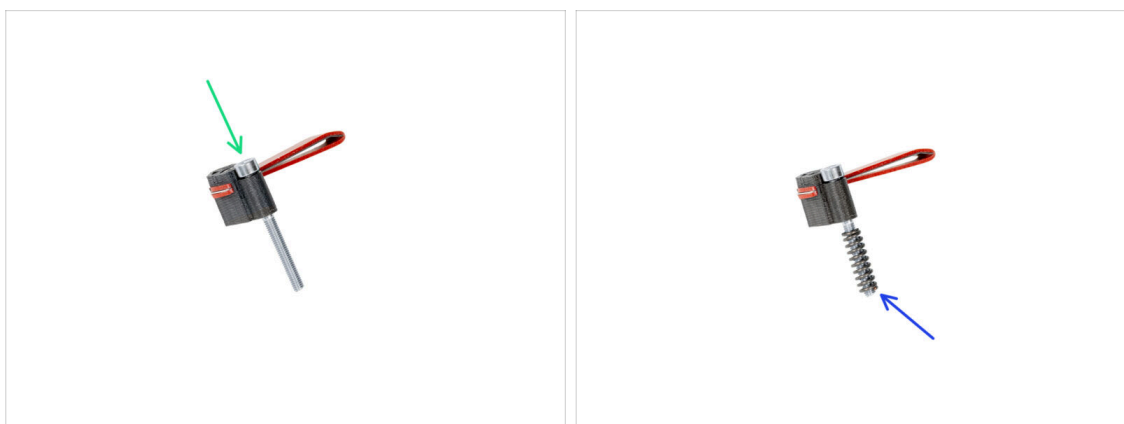


● Insert the M3x30 screw into each nozzle seal.





● Slide the spring on each nozzle seal.

ⓘ **Do this for all five nozzle seals.**

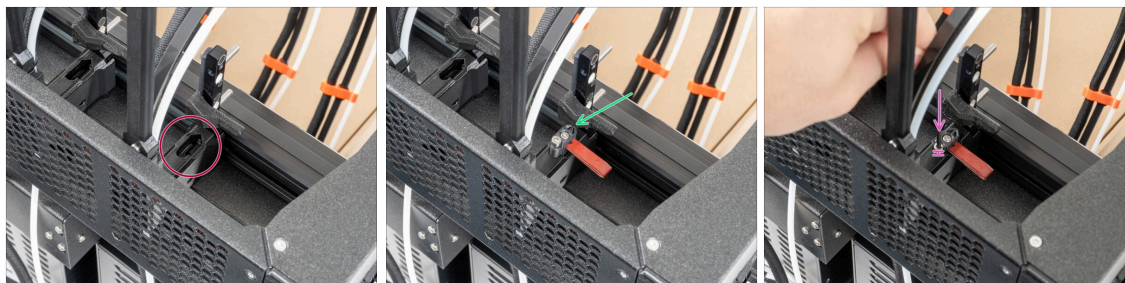

## STEP 19 Version C: Installing the nextruder nozzle seal




- i** The current nozzle seal position is temporary, the exact height will be set in the next chapter once all the Nextruder parts are mounted.
-  Locate the hole for a nozzle seal on the dock.
-  Insert the nozzle seal (with the spring) into the dock.
-  Using a 2.5 mm Allen key, tighten the screw so that the head of the screw is 1 mm above the dock.
-  Good! The first dock is ready.
- i** Repeat this procedure for all remaining docks.

## STEP 20 Wi-Fi antenna holder versions




- ❶ **XL printers feature two distinct Wi-Fi antenna mounts:** one located **on the side** and the other **on the rear side of the printer**. Before proceeding, carefully examine your printer to identify the type of mount it has.
- Begin by verifying that the Wi-Fi mount is pre-installed on the side:
  - **Side mount (Version A):** For printers with the Wi-Fi antenna holder on the side, the **antenna holder comes pre-installed by the Prusa production** department. If your printer has this mount, proceed directly to **(Version A) Connecting the nextruder cables**.
- If the Wi-Fi mount is not pre-installed on the side:
  - **Rear side mount (Version B):** If the Wi-Fi mount is not pre-installed on the side, your printer may have the rear side mount. In this case, the **antenna holder is not pre-installed by the company**. Navigate to **Version B: Wi-Fi antenna holder: parts preparation** to install the holder and antenna.

## STEP 21 Version A: Connecting the nextruder cables

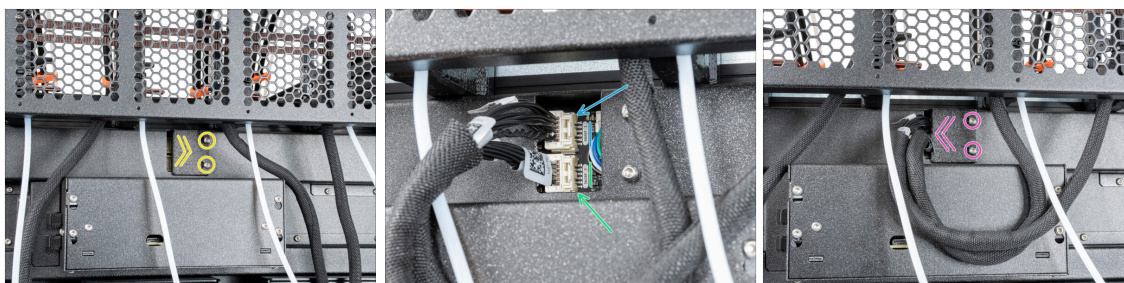

- Locate the xl-rear-cable-management-plug (cover) on the rear of the printer.
- Loosen two screws on the cover slightly. No need to remove them completely. Push the cover to the right and remove it from the printer.
- Connect the first dock (from the right side) cable to the upper slot labeled DWARF 1.
- Connect the second dock (from the right side) cable to the lower slot labeled DWARF 2.
- Attach the connectors cover to the screws. Push it all the way to the left and tighten the screws.

## STEP 22 Version A: Removing the XL buddy box cover

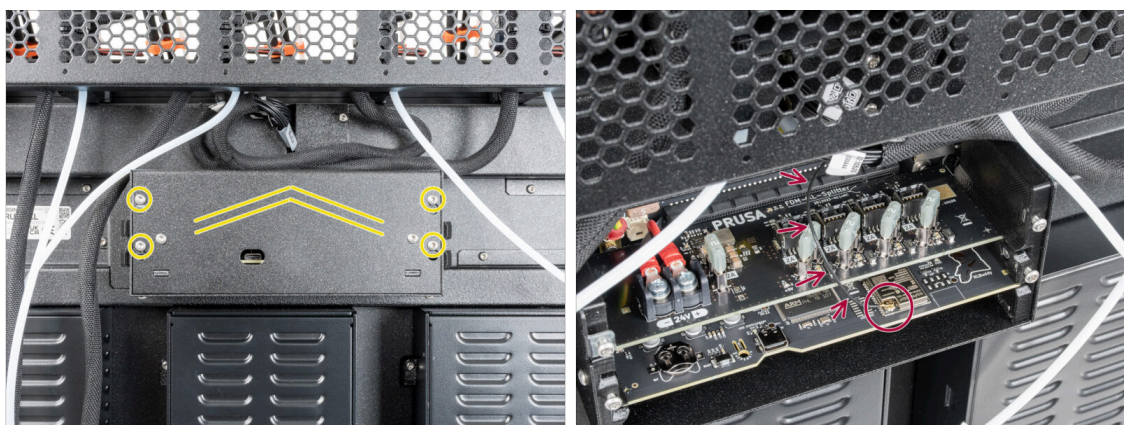

- Loosen four screws on the cover slightly. No need to remove them completely. Push the cover up and remove it from the printer.
- Don't pinch the **antenna cable** while connecting the Nextruders cables!



## STEP 23 Version A: Connecting the Nextruder cables



**⚠ Do not take the XL-Splitter board out of the printer, the photo is only an illustration of the connector locations.**

● Connect the **third, fourth and fifth** (from the right) Nextruder to the XL-Splitter:


● Third Nextruder.

● Fourth Nextruder.

● Fifth Nextruder.

ⓘ XL-splitter with connected Nextruders should look like this.

## STEP 24 Version A: Covering the XL buddy box

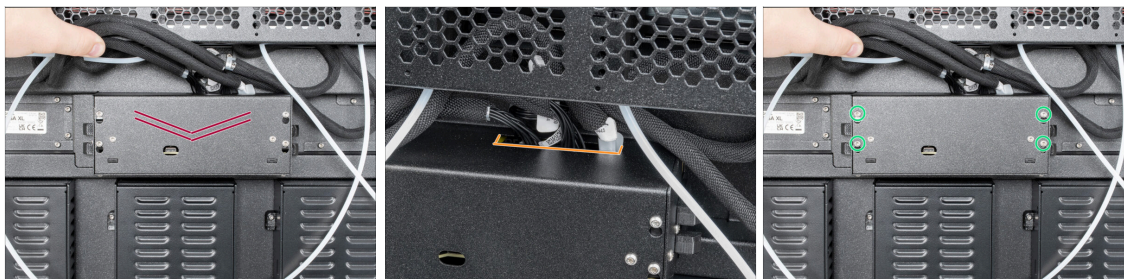


**⚠ Be carefull, do not pinch any cables!**

● Put the XL buddy box cover back on the printer.

● Check Nextruder cables, they have to be inside the cutout in the cover.

● With a T10 key tighten the four screws.

## STEP 25 Version A: Guiding the PTFE tubes

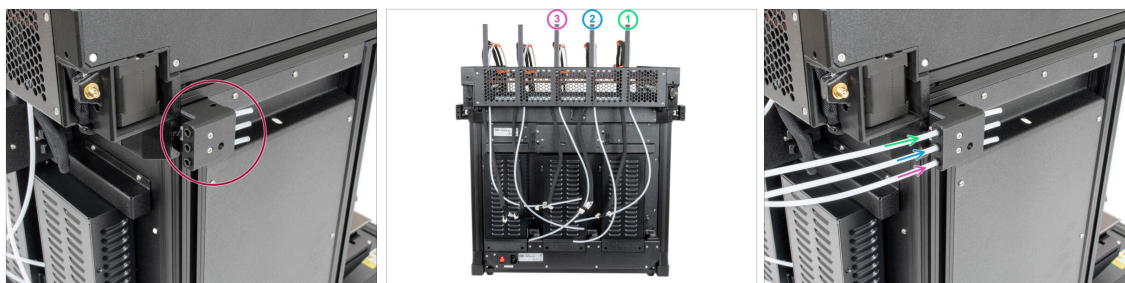

- 🔴 Locate the side filament sensor.
- 🟢 Insert the PTFE tube from the **first** dock (from the right side) all the way into the upper hole in the part.
- 🟡 Insert the PTFE tube from the **second** dock (from the right side) all the way into the middle hole in the part.
- 🟣 Insert the PTFE tube from the **third** dock (from the right side) all the way into the lower hole in the part.

## STEP 26 Version A: Guiding the docks PTFE tubes



- 🔴 Locate the left filament sensor.
- 🟡 Insert the **fourth** dock (from the right side) PTFE tube all the way into the **upper** hole in the part.
- 🟣 Insert the **fifth** dock (from the right side) PTFE tube all the way into the **lower** hole in the part.

## STEP 27 Version A: Installing the Wi-Fi antenna: parts preparation




● For the following steps, please prepare:

● Wi-Fi antenna (1x)

ⓘ The Original Prusa XL is shipped with two versions of the Wi-Fi antenna, each with a different shape. The functionality is the same.

## STEP 28 Version A: Installing the Wi-Fi antenna

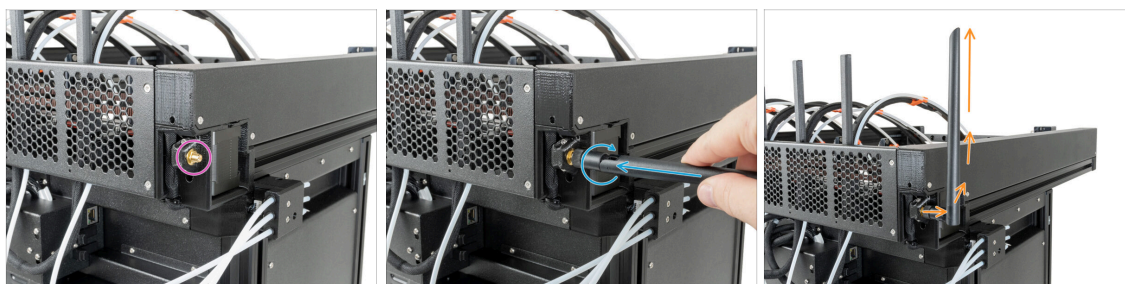

● Locate the Wi-Fi antenna connector on the right rear corner of the printer.


● The antenna can be rotated around and bent in two directions.

● We recommend pointing the antenna straight upwards.

ⓘ Now skip to [Step 35 - Spool holder: parts preparation](#)

---

## STEP 29 Version B: Wi-Fi antenna holder: parts preparation

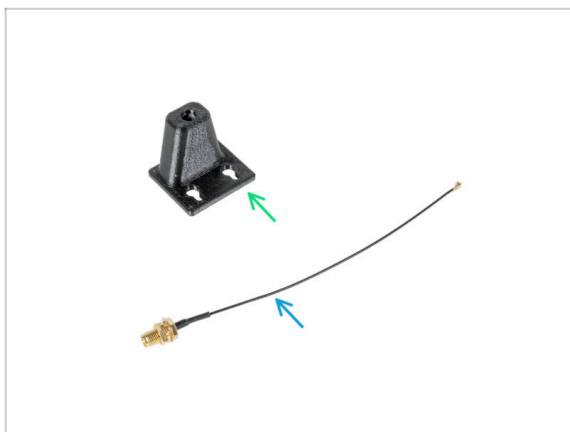

● **For the following steps, please prepare:**

- Wi-Fi-antenna-holder version E3/E4 (1x)
- Antenna cable (1x)

---


## STEP 30 Version B: Installing the Wi-Fi antenna: antenna preparing



- Remove the nut with the washers from the antenna connector.
- The antenna connector is prepared.
- The latest version of the connector has a thicker washer. We don't need it anymore. You can throw it away.
- Insert the antenna connector into the same-shaped hole in the Wi-Fi-antenna-holder .




## STEP 31 Version B: Installing the Wi-Fi antenna: antenna preparing

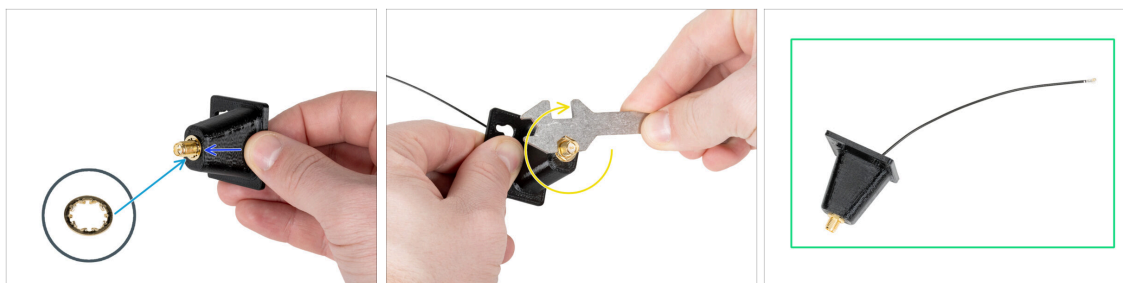

- Push the antenna connector through the Wi-Fi-antenna-holder.
- Insert the thinner washer back onto the connector.
- Using the universal wrench, tighten the nut on an antenna connector.
- Good job! The Wi-Fi antenna is prepared.

## STEP 32 Version B: Connecting the nextruder cables

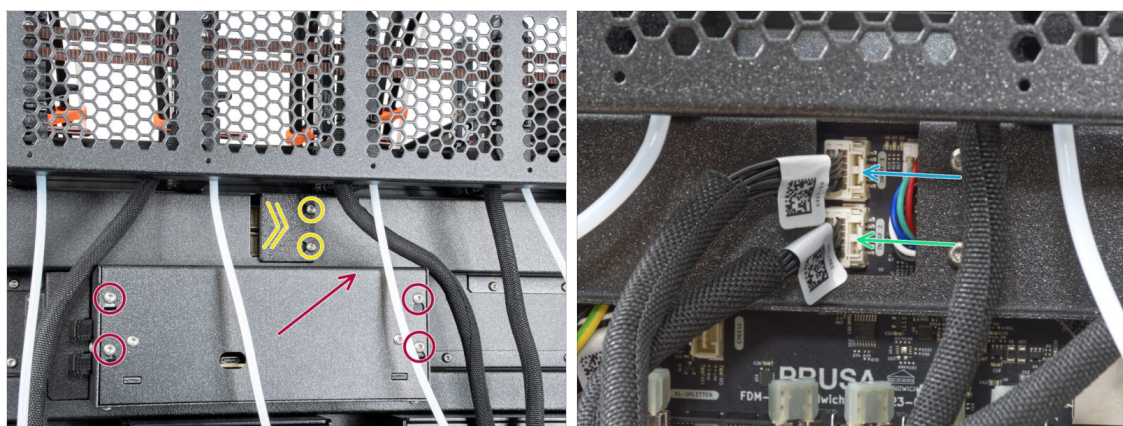


- Locate the xl-rear-cable-management-plug (cover) on the rear of the printer.
- Loosen two screws on the cover slightly. No need to remove them completely. Push the cover to the right and remove it from the printer.
- Loosen four screws securing the electronics cover. Remove the cover.
- Connect the first dock (from the right side) cable to the upper slot labeled DWARF 1.
- Connect the second dock (from the right side) cable to the lower slot labeled DWARF 2.

## STEP 33 Version B: Installing the Wi-Fi antenna holder



- ✦ Push the antenna cable through the opening in the cable cover (metal sheet) and guide it behind the cover to the electronics box.
- ✦ Attach the antenna-holder on the screws and push the cover to the left. Tighten the screws.
- ✦ Connect the antenna to the appropriate slot on the XL Buddy board.

## STEP 34 Version B: Connecting the Nextruder cables

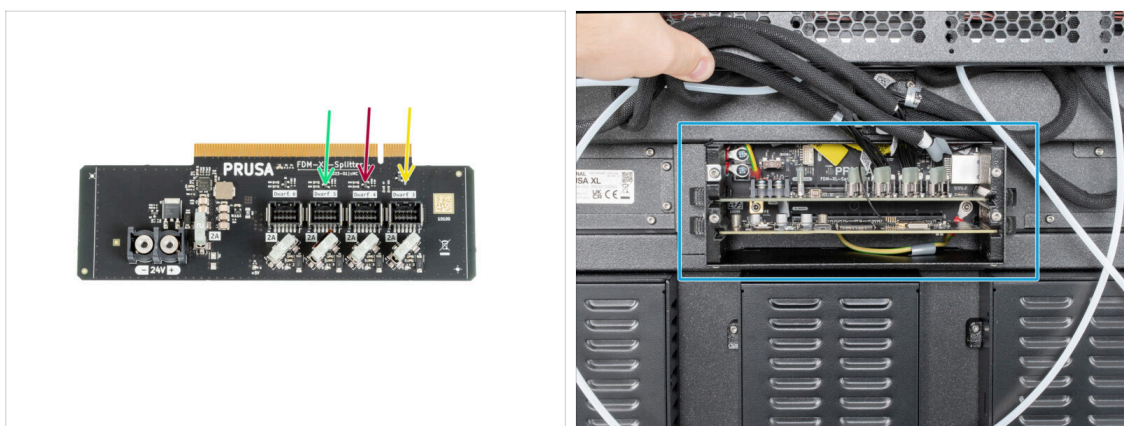

- ❗ **Do not take the XL-splitter board out of the printer**, the photo is only a tool for connecting the nextruder cables.
- ✦ Connect the third, fourth and fifth (from the right) Nextruder to the splitter:
  - ✦ Third Nextruder.
  - ✦ Fourth Nextruder.
  - ✦ Fifth Nextruder.
- ✦ XL-splitter with connected Nextruders has to look like this.

## STEP 35 Version B: XL buddy box covering



**Be carefull, do not pinch any cables!**

- ◆ Put the XL-buddy-box-cover back on the printer.
- ◆ Check Nextruders cables, they have to be inside the cutout in the cover.
- ◆ With a T10 key tighten the four screws.


## STEP 36 Version B: Guiding the docks PTFE tubes



- ◆ Locate the right filament sensor.
- ◆ Insert the **first** dock (from the right side) PTFE tube all the way into the **upper** hole in the part.
- ◆ Insert the **second** dock (from the right side) PTFE tube all the way into the **middle** hole in the part.
- ◆ Insert the **third** dock (from the right side) PTFE tube all the way into the **lower** hole in the part.



## STEP 37 Version B: Guiding the PTFE tubes

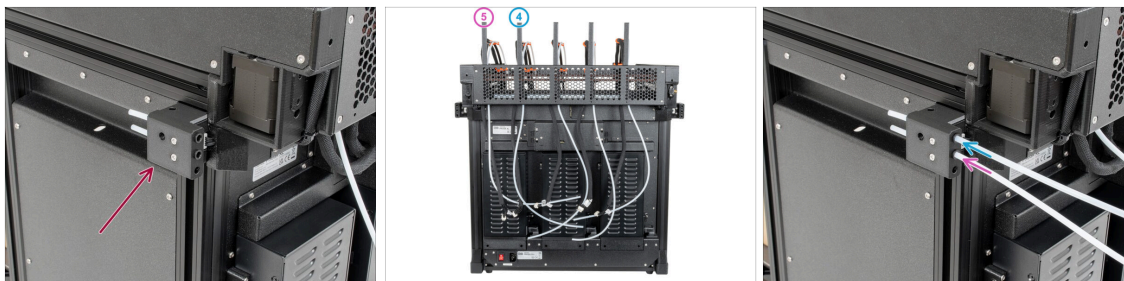

- 🔴 Locate the left filament sensor.
- 🔵 Insert the PTFE tube from the **fourth** dock (from the right side) all the way into the upper hole in the part.
- 🟡 Insert the PTFE tube from the **fifth** dock (from the right side) all the way into the middle hole in the part.


## STEP 38 Version B: Installing the Wi-Fi antenna: parts preparation



- ⬛ For the following steps, please prepare:
- 🔵 Wi-Fi antenna (1x)
  - 📘 The Original Prusa XL is shipped with two versions of the Wi-Fi antenna, each with a different shape. The functionality is the same.




## STEP 39 Version B: Installing the Wi-Fi antenna

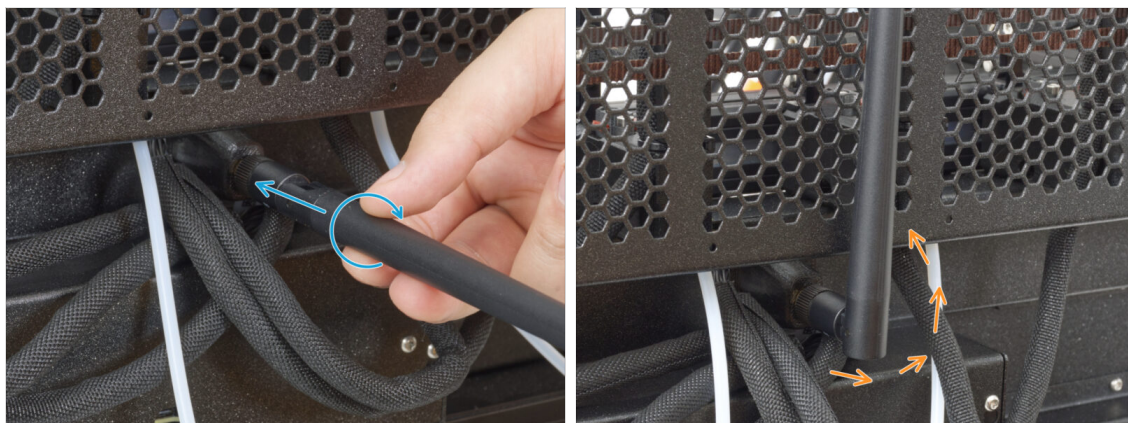

- ◆ Locate the Wi-Fi antenna connector in the middle of the printer.
- ◆ Screw the Wi-Fi antenna on the antenna connector. The antenna can be rotated around and bent in two directions.
- ◆ We recommend pointing the antenna straight upwards.

## STEP 40 Spool holder assembly versions

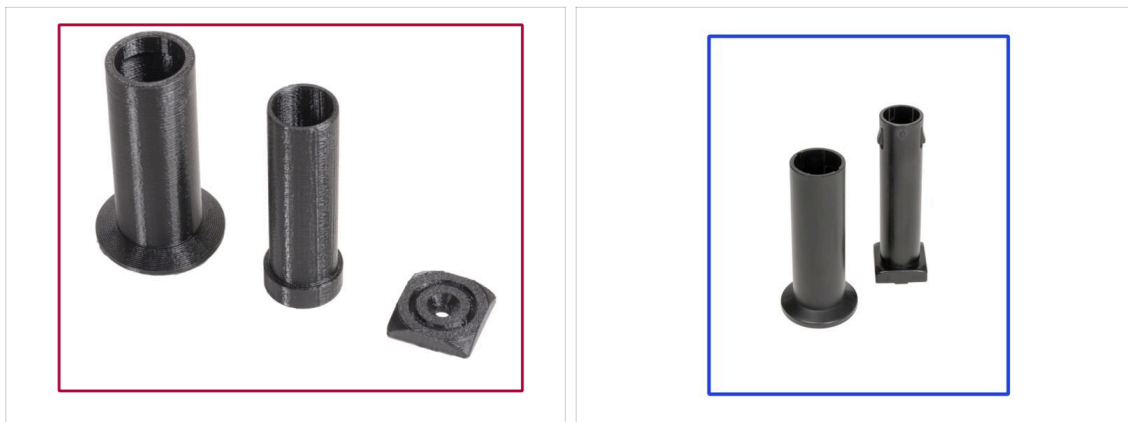

- ① **Original Prusa XL comes with two versions of the spool holder.** Each version has slightly different parts and different procedure.
- ◆ **Refer to the pictures to compare which parts you have, and then choose the instructions that match:**
  - ◆ **Printed spool holder (Version A):** Set of three printed parts. If you have this version, continue to the **Version A: Spool holder: parts preparation**.
  - ◆ **Injection molded spool holder (Version B):** Set of two injection molded parts. If you have this version, continue to **Version B: Assembling the spool holder: parts preparation..**

## STEP 41 Version A: Spool holder: parts preparation



● For the following steps, please prepare:

- Spool-holder-slider (5x)
- Spool-holder-base (5x)
- Spool-holder-mount (5x)
- M5x85 screw (5x)
- M5nEs nut (5x)

## STEP 42 Version A: Spool holder: left side



- Carefully turn the printer so that the side with the Wi-Fi antenna faces you.
- Insert the M5nEs nut into the front support extrusion (with the orange plastic cover). Insert the side with the spring (metal plate) first, then push the nut inside.
- The M5nEs nut is free to move, you can adjust the position as you want. But remember, the nut must be slightly pushed in to smoothly move. Anyway, we recommend approximately the same position as you can see in the picture.
- Insert **second** and **third** M5nEs nut in the extrusion approximately to the same position as shown.


## STEP 43 Version A: Assembling the spool holder



◆ **Repeat this step for all five spool holders:**

- ◆ Insert the spool-holder-base into the spool-holder-slider and push it through a little through the part.
- ◆ Attach the spool-holder to the spool-holder-mount.
- ◆ Insert the M5x85 screw into the spool-holder-assembly.

## STEP 44 Version A: Mounting the spool holder assembly

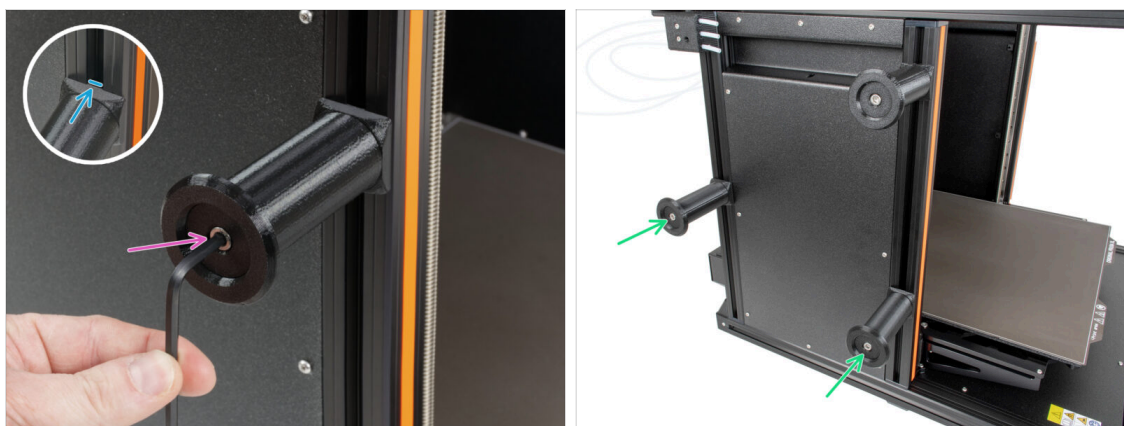


- ◆ Attach the spool holder assembly to the M5nEs nut in the extrusion. Note that there is a protrusion on the spool-holder-mount, which must fit into the groove in the extrusion.
- ◆ Tighten the spool holder assembly with a 4 mm Allen key.
- ◆ Attach and tighten the second and the third spool holder to the M5nEs nut using a 4 mm Allen key.

⚠ **Do not use the spool holder as a handle!**

- ⓘ Keep in mind that if you mount the Spool holder too high or too low, it may not fit the filament spool on it. There has to be enough space around it.

## STEP 45 Version A: Spool holder: right side assembly

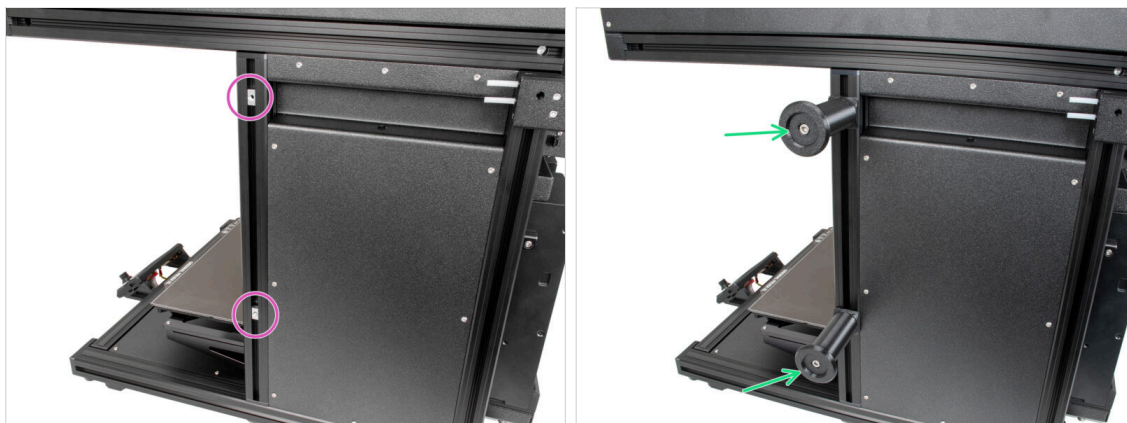

- Carefully turn the printer so that the side without the Wi-Fi antenna faces you.
- Insert the fourth and fifth M5nEs nut in the extrusion approximately to the same position as shown.
- Attach and tighten the fourth and the fifth spool holder to the M5nEs nut using a 4 mm Allen key.
- ⚠ **Do not use the spool holder as a handle!**
- ⓘ Keep in mind that if you mount the Spool holder too high or too low, it may not fit the filament spool on it. There has to be enough space around it.
- Now, go to **Nextruder assembly: parts preparation**.

## STEP 46 Version B: Assembling the spool holder: parts preparation



- For the following steps, please prepare:
- Spool-holder-slider 5x)
- Spool-holder-base (5x)
- M4x12 screw (5x)
- M4nEs nut (5x)



## STEP 47 Version B: Assembling the spool holder: adjusting the nut



- Carefully turn the printer so that the side with the Filament sensor (with 3 PTFE tubes) is facing you.
- Insert the first M4nEs nut into the front support extrusion (with the orange plastic cover). Insert the side with the spring (metal plate) first, then push the nut inside.
- Insert the second and the third M4nEs nut into the extrusions as described in the picture.
- The M4nEs nuts are free to move, you can adjust the position as you want. But remember, the nuts must be slightly pushed in to smoothly move. Anyway, we recommend approximately the same position as you can see in the picture.

## STEP 48 Version B: Assembling the spool holder




- Locate pins two pins on the spool-holder-base and line them with the rails in the spool-holder-slider.
- Insert the spool-holder-base into the spool-holder-slider and push it through a little through the part.

## STEP 49 Version B: Preparing the spool holder



- ✚ Insert the M4x12 screw on the longer side of the 3mm Allen key.
- ✚ Insert the 3mm Allen key with the M4x12 screw through the assembled spool holder to the prepared hole in the spool-holder-base.
- ✚ The M4x12 screw has to protrude through the spool-holder-base.

## STEP 50 Version B: Spool holder: left side assembly

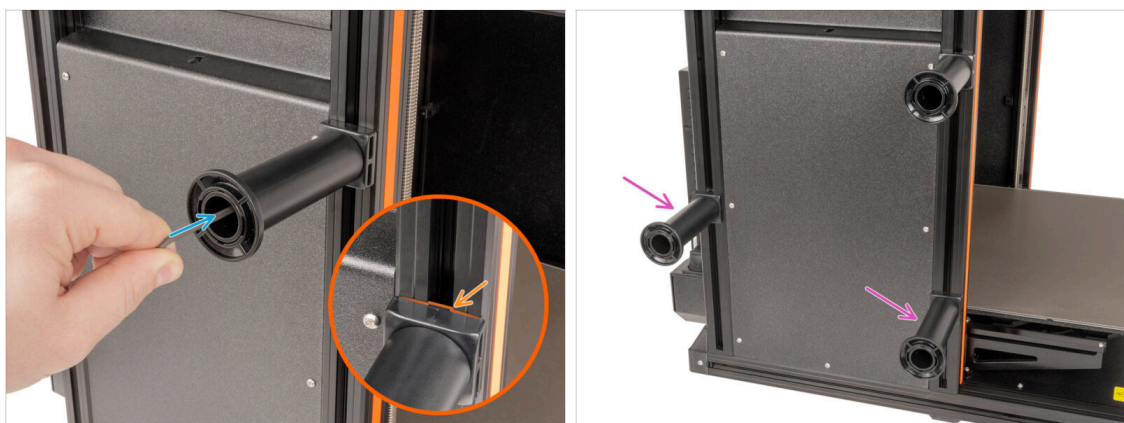

- ✚ Attach the first spool holder assembly to the M4nEs nut in the extrusion. Note that there is a protrusion on the spool-holder-base, which must fit into the groove in the extrusion.
- ✚ Tighten the spool holder assembly.
- ✚ Assemble the second and the third spool holder and attach them to the M4nEs nuts with M4x12 screws.


 **Do not use the spool holder as a handle!**

## STEP 51 Version B: Spool holder: right side assembly




- Turn the printer, so the Filament sensor (with two PTFE tubes) is facing you.
- Insert the fourth and fifth M4nEs nut in the extrusion approximately to the same position as shown.
- Attach and tighten the fourth and the fifth spool holder to the M4nEs nut using a 3 mm Allen key.
- ⚠ **Do not use the spool holder as a handle!**
- ⓘ Keep in mind that if you mount the Spool holder too high or too low, it may not fit the filament spool on it. There has to be enough space around it.

## STEP 52 Nextruder assembly: parts preparation

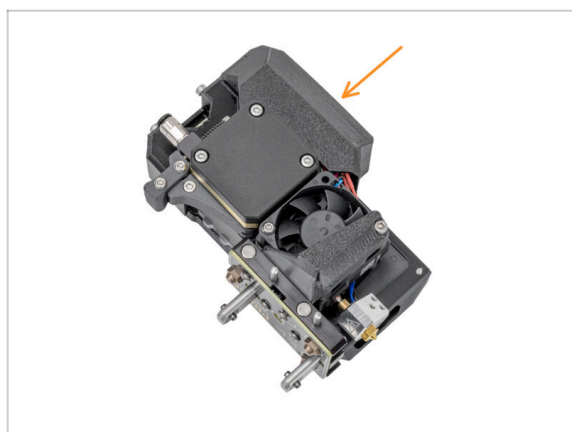

- ⓘ Starting in April 2025, you may receive a new Nextruder. The difference is described before the cable bundle is connected to the Nextruder.
- For the next steps, please prepare:
  - Nextruder (5x)

## STEP 53 Docking the Nextruder

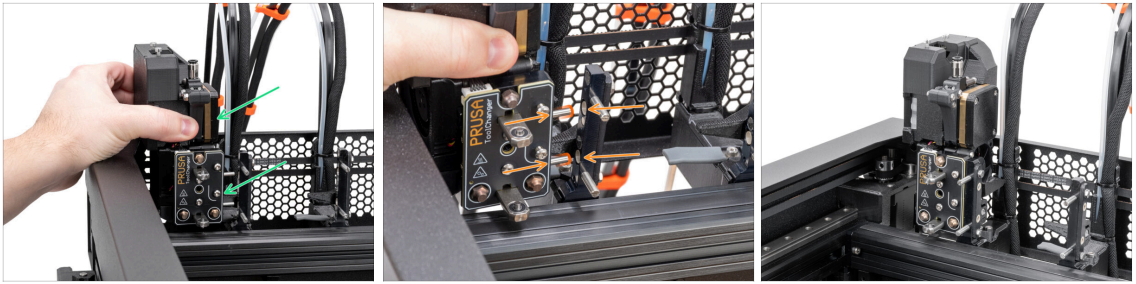

- Take the Nextruder and place it carefully next to the dock.
- Place the two metal inserts through the white holes in the dock. The magnets will help you dock the Nextruder.
- Well done, the first Nextruder is ready!
- Dock the **second, third, fourth and fifth** Nextruder in the same way as the first.


## STEP 54 Nextruder cable bundle assembly



- **Repeat this step for all tool heads:**
  - Take the first Nextruder cable bundle.
  - ⚠ **Check that the cable bundle is not twisted!**
  - Loosen the two highlighted screws. Hook up the keyhole openings in the flexible plate of the cable bundle onto the screw heads and push it up to correct the position.
  - Hold the Nextruder and using a T10 Torx screwdriver tighten the two screws.



## STEP 55 Nextruder cable bundle assembly versions

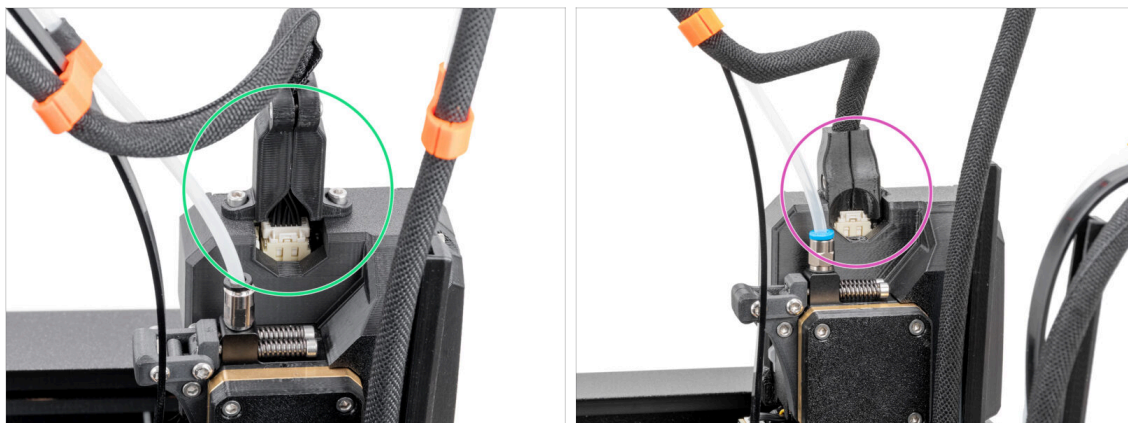

**i** Starting from April 2025, you may receive a new cable bundle.

**Version A:** The cable bundle connector is secured with two screws. Continue to the next step.

**Older version:**

**Version B:** The cable bundle connector is secured without any screws. Continue to **Version B: Nextruder cable bundle assembly**

## STEP 56 Version A: Nextruder cable bundle assembly



**Repeat this step for all tool heads:**

**Green arrow:** Insert the semi-transparent PTFE tube into the fitting on the Nextruder. Push it all the way in.

**Blue arrows:** Remove two M3x10 screws.


**Purple arrows:** Attach the cable connector to the top of the Nextruder. Secure the connector with two M3x10 screws.

**Black hexagon:** Assemble and connect all Nextruders.

**Black hexagon:** Good job, now proceed to **Almost done!**

---

## STEP 57 Version B: Nextruder cable bundle assembly

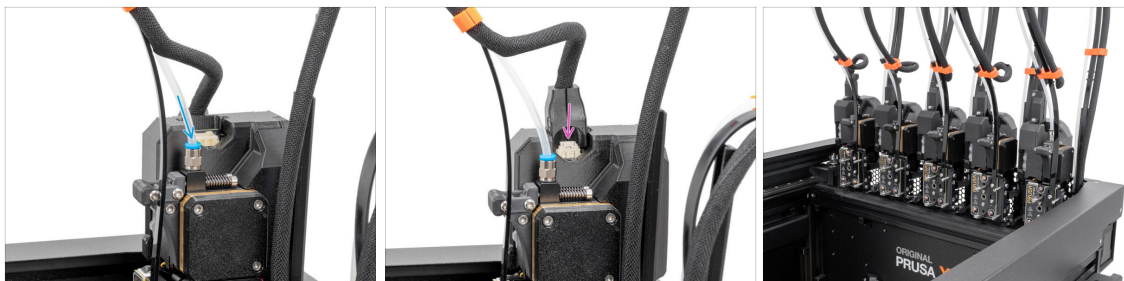

● **Repeat this step for all tool heads:**

● Insert the semi-transparent PTFE tube into the fitting on the Nextruder. Push it all the way in.

● Attach the cable connector into the top of the Nextruder.

① Starting from September 2024, you may receive a new black Fitting M5-4. The assembly and functionality remain identical to the blue one.

● Assemble and connect all Nextruders.

● Good job!

---

## STEP 58 Almost done!



● **Congratulation!** Your Original Prusa XL is ready to be fired up!

● Compare the final look with the picture.

● Now, let's go to the last chapter **5. First run.**

## 5. First run



---

## STEP 1 Before you start with Multi-Tool



- ⓘ This chapter shows a brief description of the wizard. Please note that the screenshots are illustrative and might differ from those in the firmware.
- ⓘ Make sure you are running **Firmware 5.1.2 or newer**
- ⓘ Some parts of the wizard must be done multiple times, this depends on the number of tool-heads. For example:
  - ⬢ Dock Calibration
  - ⬢ Loadcell calibration
  - ⬢ Filament sensor calibration

---

## STEP 2 Prusa Nextruder sock (Optional)



- ⬢ A silicone sock is supplied with each Nextruder package.
- ⬢ If you want to install the sock, **do it before the calibration.**
- ⓘ How to install the sock - [check the article.](#)

### STEP 3 Nozzle seal height calibration



- ❶ Starting from May 2024, you may receive a gray nozzle seal. The assembly and functionality remain identical to the red one.
- ⬛ On the Nozzle seal height calibration steps were used docked Nextruder without the printer for better visibility, proceed next steps on your printer. **Do not dismantle the docks.**
- 🟢 In the next step, we'll calibrate the height of the nozzle seal.
- 🟡 Using the 2.5 mm Allen key, tighten or untighten the M3x30 screw to calibrate the height of the nozzle seal.
- ⬛ Proceed to the next step.

### STEP 4 Nozzle seal height calibration



- ⬛ If the Nozzle seal is too low or too high, we need to reposition its height.
- 🔴 Using a 2.5 mm Allen key, turn the M3x30 screw clockwise to set the Nozzle seal lower.
- ❶ If you are having trouble reaching the screw, then you can detach the adjacent printhead to gain better access.
- 🟢 If the Nozzle seal is not bent and it is touching the nozzle, it is in the correct position.


## STEP 5 Preparing the printer



⚠ Make sure that the printer is placed in a stable place where no ambient vibrations are transmitted (for example, where other printers are printing).

- ✦ From the rear side of the printer, plug in the PSU cable.
- ✦ Turn the power switch ON (symbol "I").


## STEP 6 Firmware update

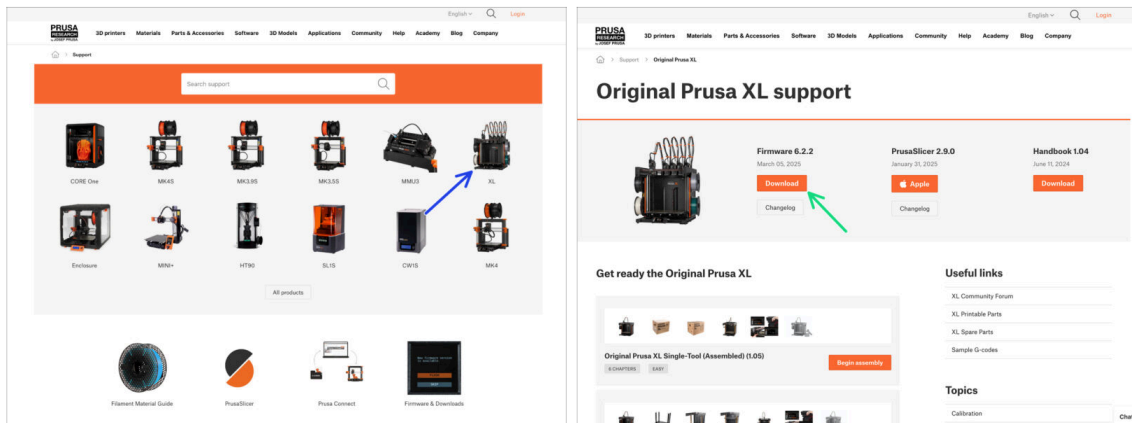

- ① All shipped printer packages include a USB drive with the latest firmware. However, it is recommended to check and possibly upgrade the firmware version.
- ✦ Visit the [help.prusa3d.com](https://help.prusa3d.com) page.
- ✦ Navigate to the Prusa XL page.
- ✦ Save the firmware file (.bbf) onto the bundled USB drive.
- ① Pro tip: To access Prusa XL homepage you can use the URL: [prusa.io/XL](https://prusa.io/XL)




## STEP 7 Wizard

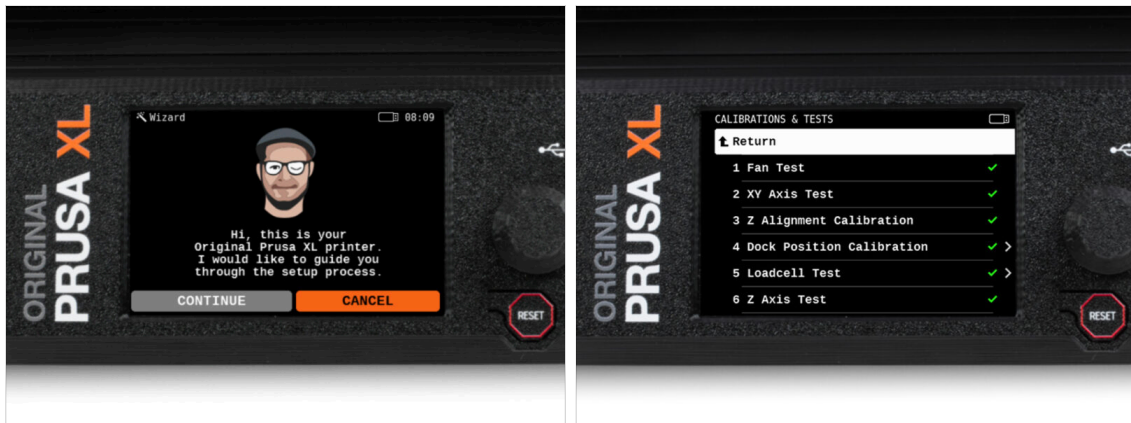


- After the printer starts up, the screen prompts for the printer test and setup wizard.
- ❗ The wizard will test all important components of the printer. The whole process takes a few minutes. Some parts of the wizard require direct user interaction. Follow the instruction on the screen.
- ⚠ **NOTE:** While testing the axes, make sure that there is nothing in the printer that is obstructing the movement of the axes.
- ⚠ **WARNING:** Do not touch the printer during the wizard unless prompted! Some parts of the printer may be HOT and moving at high speed.

## STEP 8 Wizard: Dock Position Calibration

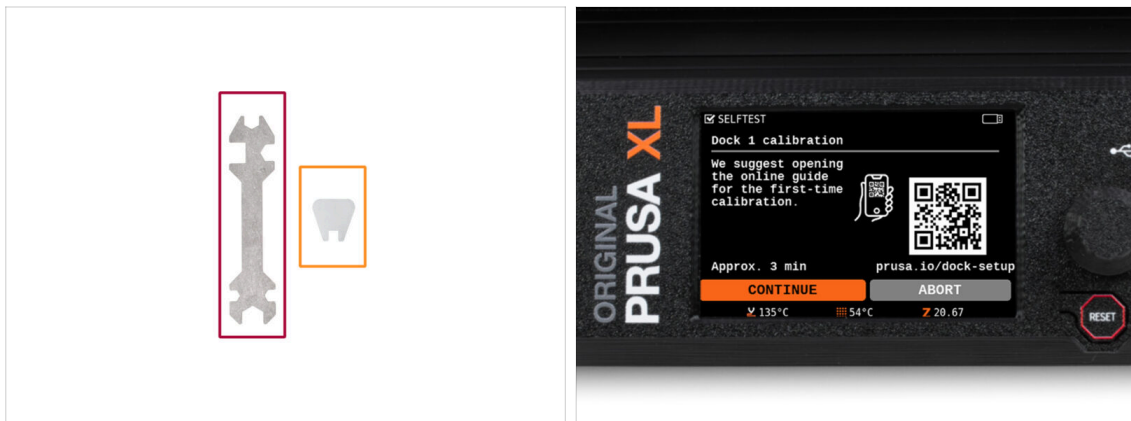


- You will need:
  - Universal wrench (1x)
  - Mini wrench (1x)
- Dock calibration will guide you through how to properly calibrate the position of individual tool heads on the printer.
- ⚠ It is necessary to follow every step in the dock calibration properly! **Do not rush, read every step twice, then proceed with the instruction.**

## STEP 9 Wizard: Loosen pin

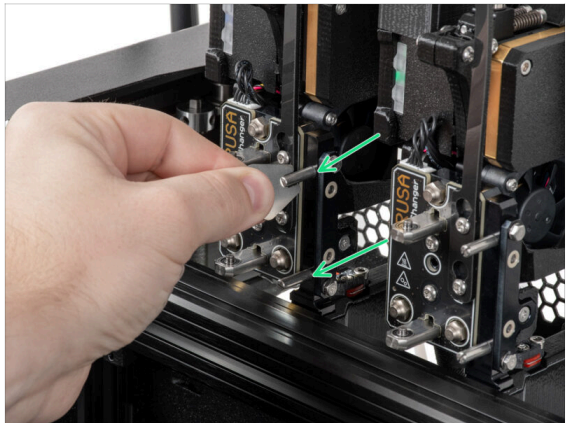


- Follow the wizard instructions on the screen.
- Using a Mini wrench, unscrew both dock pins on Dock 1.

## STEP 10 Wizard: Loosen screws

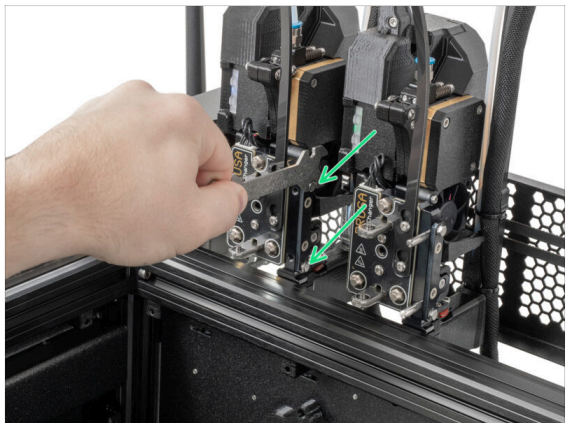

- Follow the wizard instructions on the screen.
- Using a Uni wrench, loosen two screws. **A few turns are enough.**

## STEP 11 Wizard: Lock the tool

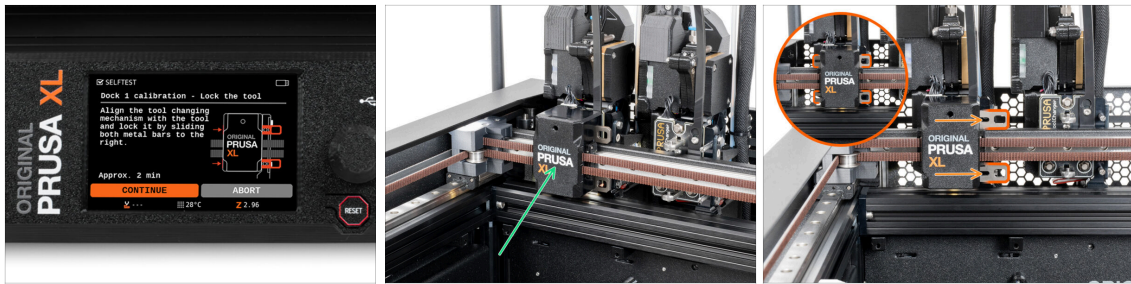

- Follow the wizard instructions on the screen.
- Manually move the Tool changing mechanism to the first tool.
- Manually lock the metal bars as described in the picture.
- ⚠ **The tool has to be locked in the tool changer.**



## STEP 12 Wizard: Tighten the upper screw



- Follow the wizard instructions on the screen.
- Using a Uni wrench, tighten the upper screw on a side of the dock.
- ⚠ **After confirming by the *continue* button on the LCD, the XY axis will leave the dock with the tool. Clear the space.**




## STEP 13 Wizard: Tighten the lower screw

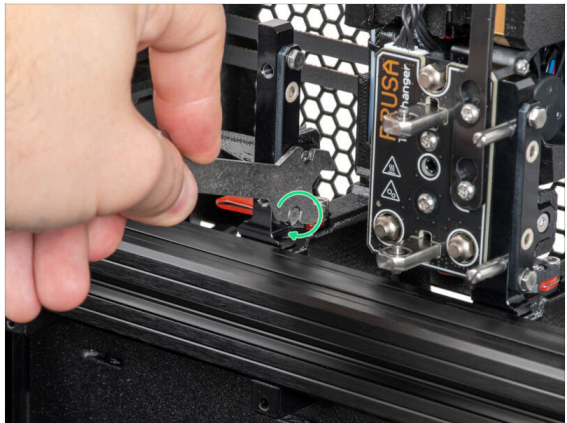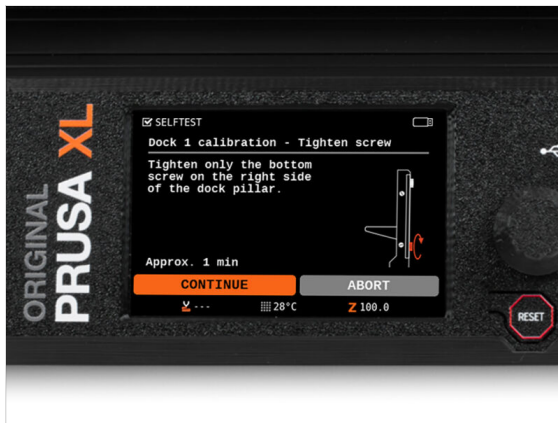


- Follow the wizard instructions on the screen.
- Using a Uni wrench, tighten the lower screw on a side of the dock.

## STEP 14 Wizard: Install pins

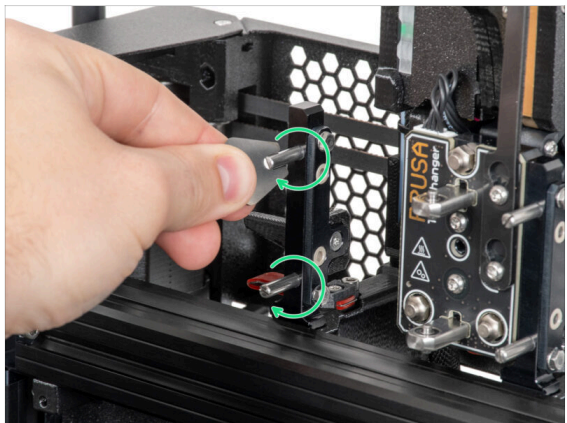

- Follow the wizard instructions on the screen.
- Insert the two metal pins and tighten them with a Mini wrench.
- After clicking on the *continue* button on the LCD, the printer will put back the tool into the dock1 and do a few calibration moves.

## STEP 15 Wizard: Dock successfully calibrated

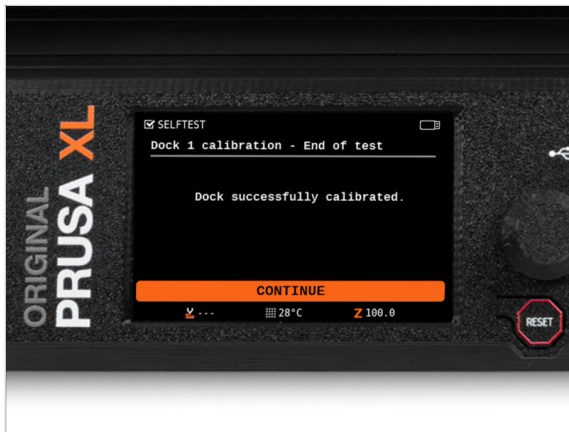

- Good job! The Dock1 is calibrated.
- According to the number of print heads, the dock calibration process is repeated.

## STEP 16 Wizard: Loadcell test




- The next step of the wizard will prompt you to touch the nozzle to test and calibrate the **Loadcell**. During this procedure, the parts of the printer are not heated, you can touch the parts of the printer. Click on **Continue**.
- i** You can look at the nozzle while you wait, the printer will make a sound when you need to touch the nozzle.
- Do not touch the nozzle yet, wait until prompted with the message: **Tap the nozzle NOW**.
- Slightly tap the nozzle. No need to use extra force. In case the Loadcell does not detect enough touch, you will be prompted to repeat the step. Otherwise, you will see **Loadcell test passed OK** when it succeeds.
- According to the number of print heads, the loadcell test process is repeated.

## STEP 17 Wizard: Calibrate Filament Sensors



- During the calibration of the filament sensors, you will be prompted to use at least 130 cm of filament. *Hint: Use the Prusament shipped with your printer and hang it directly on the spool holder.*
- When you have prepared the filament, click on **YES**.
- Wait for the printer to prompt you to insert the filament into the side filament sensor.

## STEP 18 Wizard: Calibrate Filament Sensors

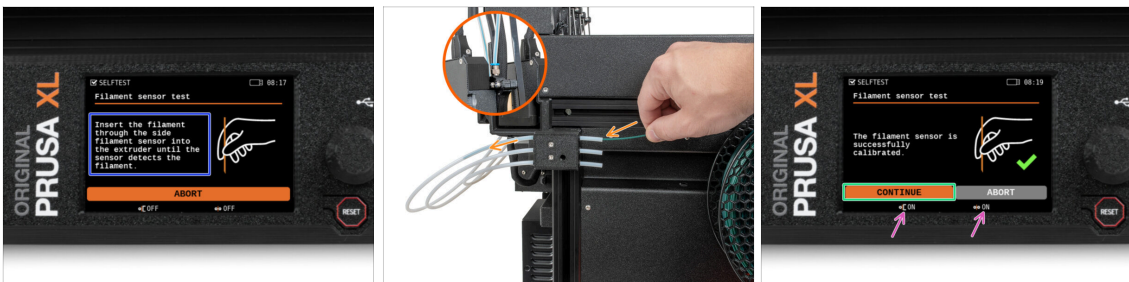


- Now, insert the filament into the side filament sensor and push it until it reaches the filament sensor in the extruder (you will feel a slight resistance).
- You can check the side filament sensor (left) and extruder filament sensor (right) status on the bottom bar on the screen.
- ① According to the number of print heads, the filament sensor calibration is repeated.
- All filament sensors are successfully calibrated and tested. Click on **CONTINUE**.



---



## STEP 19 Calibration pin: parts preparing

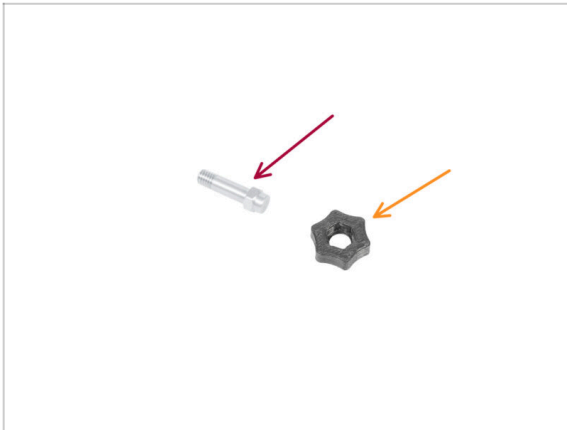

- For the next step, please prepare:
- Calibration pin (1x)
- Calibration-pin-key (1x)

---

## STEP 20 Calibration pin: parts assembly

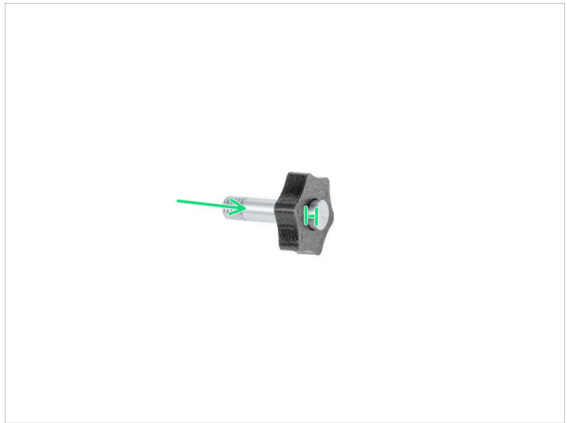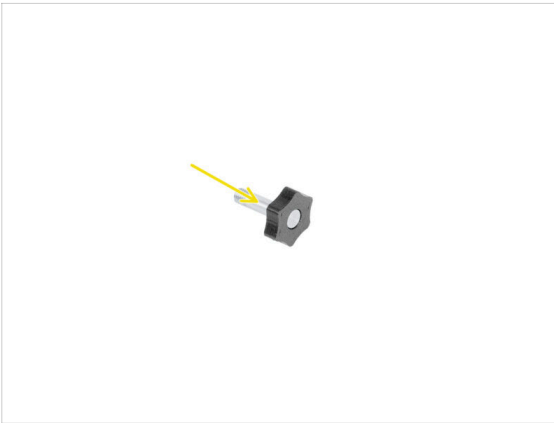


- Insert the calibration pin into the plastic part.
- Push the pin into the plastic part, so it will make a small gap on top.
- Well done, the pin is prepared.

## STEP 21 Wizard: Tool Offset Calibration




- During offset calibration, you will need to screw the calibration pin into the center of the heatbed.
- Click on *Continue* to start the Tool Offsets Calibration.
- Calibration pin (1x)

## STEP 22 Wizard: Sheet install

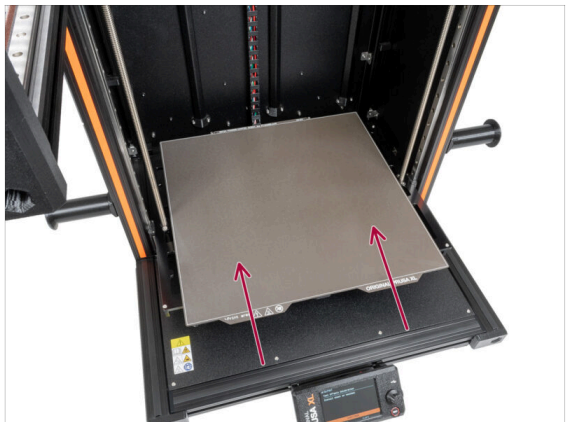

- Follow the wizard instructions on the screen.
- Put the print sheet onto the heatbed.
- ① Now, the printer starts short calibration.

## STEP 23 Wizard: Calibration pin installation

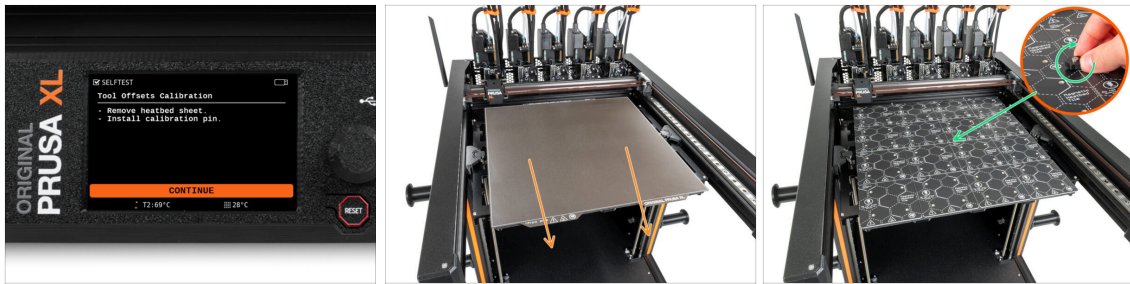

- Follow the wizard instructions on the screen.
- Take off the print sheet from the heatbed.
- Install the calibration pin into the middle of the heatbed. Turn the pin clockwise.
- ❗ Now, the printer will calibrate all the tool heads.

## STEP 24 Wizard: Offset calibration done



- Follow the wizard instructions on the screen.
- Untighten the calibration pin from the heatbed and take it off. Rotate counterclockwise.
- Place the print sheet onto the heatbed.
- ❗ The printer will finish the calibration.
- Good job! The Offset calibration is done.

---


## STEP 25 Calibration pin



- Insert the calibration pin into the left side filament sensor.

---

## STEP 26 It's done

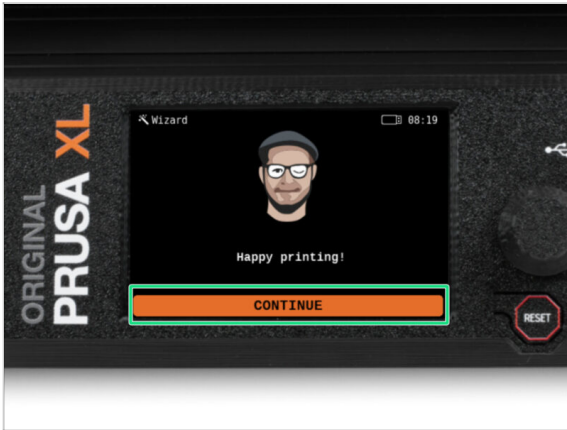

- That's all, the printer is ready to print.** But still, follow the instructions in this manual to the end.

## STEP 27 Regular printer maintenance



- ① To keep your printer working properly over time, it is highly recommended to do regular maintenance.
- ⬢ For regular printer maintenance, follow the [Regular printer maintenance \(XL\)](#) article for information and instructions.
- 📌 On multi-tool printers, it is necessary to focus on lubricating the coupler pins of the ToolHeads.
- ① Lubricating the coupler pins can be made along with the rest of the maintenance, or it can also be done if you notice that your prints have banding or ringing issues.
- 🟢 To lubricate the coupler pins use our dedicated online guide [How to lubricate the coupler pins on Original Prusa XL](#).
- ① You will need to print an applicator to lubricate the pins. Please refer to the dedicated guide for more information.


## STEP 28 Quick guide for your first prints



📌 Now, please read the **3D Printing Handbook**, which is tailor-made for your printer and **follow the instructions to set up the printer properly**. The latest version is always available at [this link](#).


⚠️ Read the chapters *Disclaimer* and *Safety instructions*.

## STEP 29 Printable 3D models

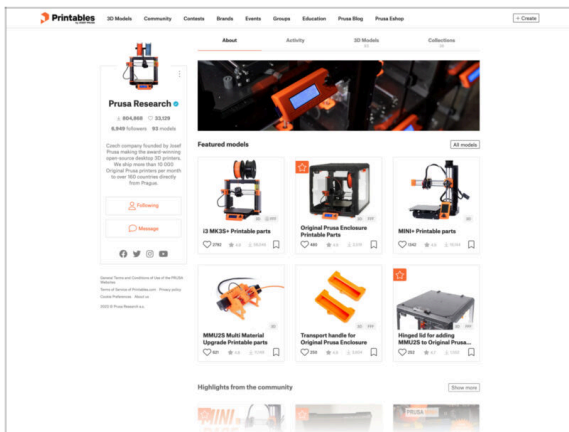


- ◆ **Congratulations! You should be ready to print by now ;-)**
- ◆ You can start by printing some of our test objects bundled on the included USB stick - you can check them out **in this collection**.

## STEP 30 Prusa knowledge base

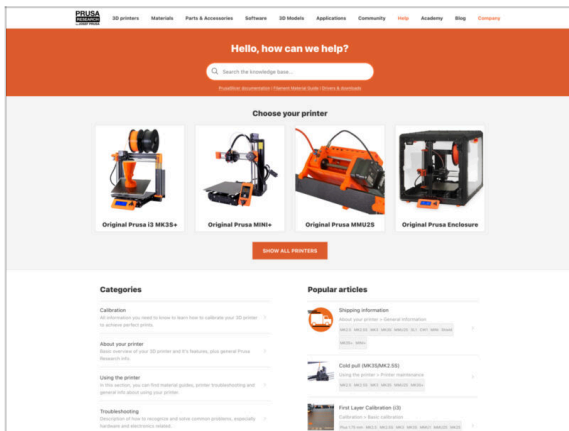

- ◆ If you encounter any problems at all, don't forget you can always check out our knowledge base at **help.prusa3d.com**
- ◆ We're adding new topics every day!


## STEP 31 Join Printables!

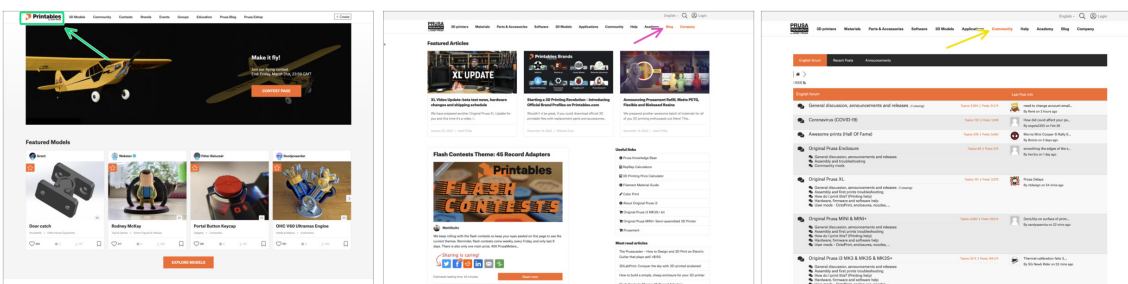


- ◆ **Don't forget to join the biggest Prusa community! Download the latest models in STL or G-code tailored for your printer. Register at **Printables.com****
- ◆ Looking for inspiration on new projects? Check our blog for weekly updates.
- ◆ If you need help with the build, check out our forum with a great community :-)
- ◆ All services share one account.



# Manual changelog Five-Head (Assembled)

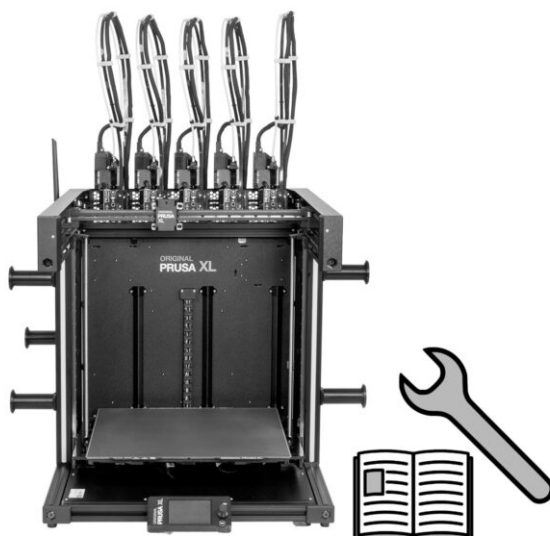


## STEP 1 Version history

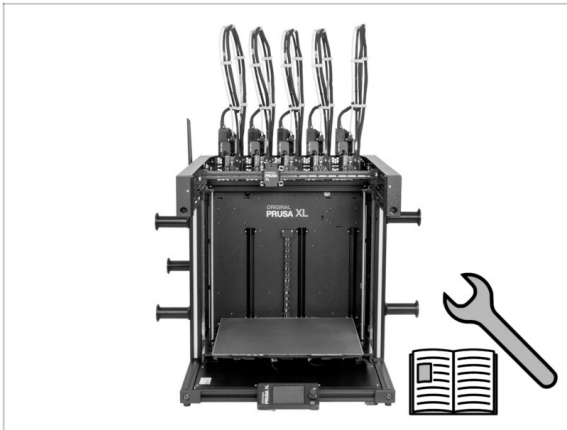

- **Versions of the Original Prusa XL semi-assembled (single tool) manual:**
- 06/2023 - Initial version 1.00
- 07/2023 - Updated to version 1.02
- 08/2023 - Updated to version 1.03
- 11/2023 - Updated to version 1.04
- 05/2024 - Updated to version 1.05
- 09/2024 - Updated to version 1.06
- 04/2025 - Updated to version 1.07


## STEP 2 Changes to the manual (1)

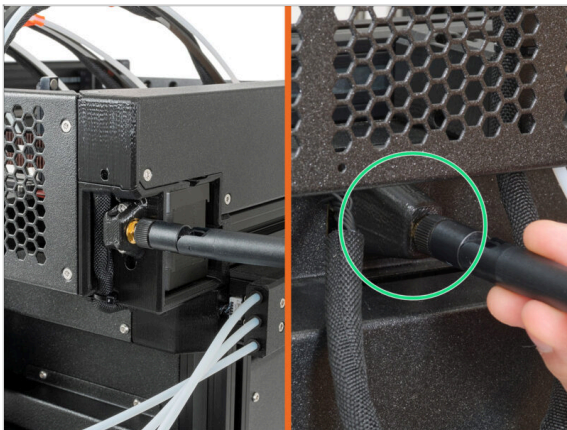

- 08/2023 - Antenna adapter
  - Added instructions for the new antenna adapter.
- ① Manual version 1.01

---

### STEP 3 Changes to the manual (2)

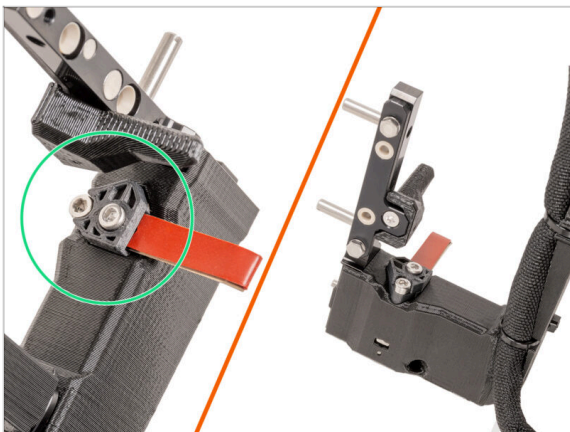

- 08/2023 - Nextruder dock
- Added instructions for the new dock.
- ⓘ Manual version 1.02

---


### STEP 4 Changes to the manual (4)



- 11/2023 - Spoolholder
- Added instructions for the new injection molded Spoolholder.
- Manual version 1.04

---

## STEP 5 Changes to the manual (5)

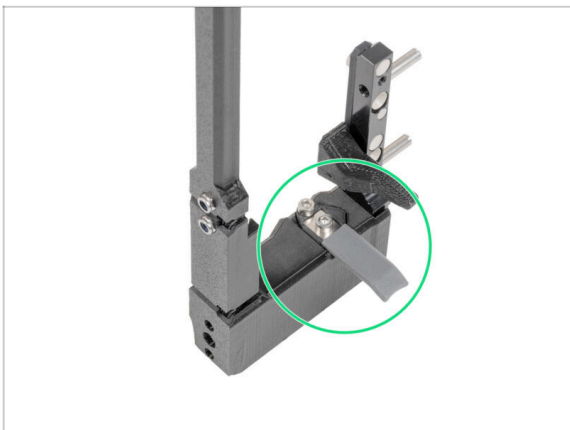

- 05/2024
  - Added information about the new gray nozzle seal.
- Manual version 1.05

---


## STEP 6 Changes to the manual (6)



- 09/2024 - xLCD
  - Added instructions for the new injection molded xLCD.
- Manual version 1.06

---

## STEP 7 Changes to the manual (7)

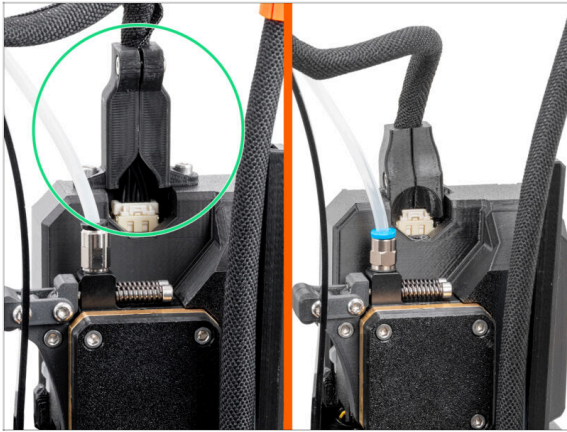

- 04/2025 - xLCD
- Added instructions for the new main cable connector cover.
- Manual version 1.07



## This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across the entire width of the page, providing a guide for handwriting or typing. The background is a clean, solid white color.

---

## This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across the entire width of the page, providing a guide for handwriting or typing. The background is a clean, solid white color.

---

## This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across the entire width of the page, providing a guide for handwriting or typing. The background is a clean, solid white color.