Tabla de Contenido

How to replace the Belt Tensioner Pulley (CORE One) 3
Paso 1 - Introduction 4
Paso 2 - Tools necessary for this guide 5
Paso 3 - Printer Preparation 5
Paso 4 - Tensioner Pulley Info 6
Paso 5 - Tensioner Pulley Removal 6
Paso 6 - Pulley Assembly Disassembly 7
Paso 7 - Belt-Tensioner-Pulley Preparation 7
Paso 8 - Tensioner Preparation 8
Paso 9 - Pulley Assembly 9
Paso 10 - Tensioning Bolt Lubrication 10
Paso 11 - Tensioner Installation 11
Paso 12 - Belt Tensioning 11
Paso 13 - Finish 12

How to replace the Belt Tensioner Pulley (CORE One)

help.prusa3d.com/g948770

Escanea el código QR para ver la última versión de este capítulo.

PASO 1 Introduction

- This guide will take you through the **Belt-tensioner-pulley** assembly replacement on your Prusa **CORE One**.
- Todas las piezas necesarias están disponibles en nuestra tienda prusa3d.com.

  Ten en cuenta que debes iniciar sesión para tener acceso a la sección de repuestos.

⚠ Advertencia: En esta guía manipularás chapas metálicas. ¡¡Ten cuidado!!

PASO 2 Tools necessary for this guide

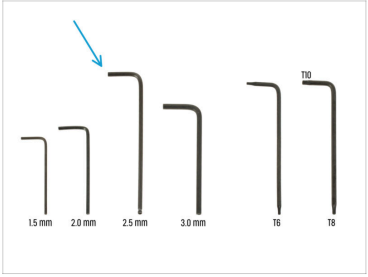

- **Por favor prepara las herramientas para este guía:**
  - 2.5mm Allen key
  - Prusa lubricant or another suitable grease (available in e-shop)

PASO 3 Printer Preparation

- En la impresora, ve al menú **Control** y selecciona **Auto Home**.
- Apaga la impresora mediante el interruptor situado en la parte posterior.
- Desconecta la impresora de la corriente.

PASO 4 Tensioner Pulley Info

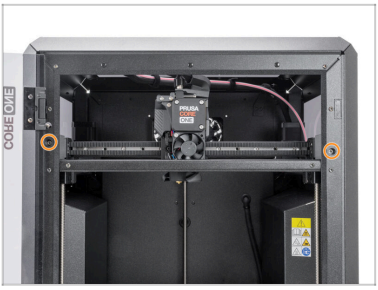

- There are two belt tensioner pulleys on each side.

  ⓘ In this guide, we demonstrate the replacement of the component on the right side of the printer, but the process is the same for the left side as well.

PASO 5 Tensioner Pulley Removal

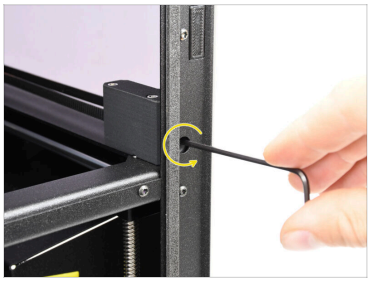

- Fully loosen the belt tensioning screw.
- On the inside of the printer, pull by the belt to disengage the belt-tensioner-pulley assembly.

PASO 6 Pulley Assembly Disassembly

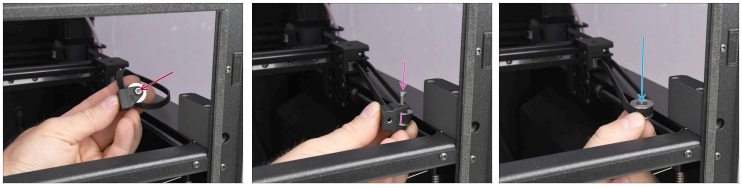

- On the pulley assembly, remove the M3x18 screw.
- The plastic part and the GT2-20 Idler Pulley will separate.
- Remove the GT2-20 Idler Pulley from the belt.

PASO 7 Belt-Tensioner-Pulley Preparation

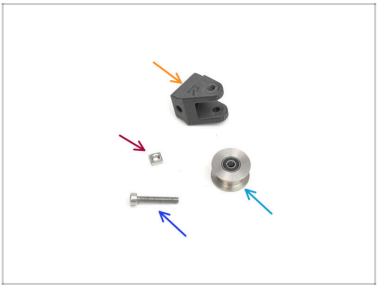

- **Para los siguientes pasos, prepara:**
- Belt-tensioner-pulley plastic part (1x)
- M3nS nut (1x)
- M3x18 screw (1x)
- GT2-20 Idler Pulley (1x)

PASO 8 Tensioner Preparation

- Note that the Belt-tensioner-pulley part has "R" and "L" markings; for use on the right side, ensure the "R" is facing up, and for the left side, the "L" should face up.
- Insert the M3nS nut into the corresponding opening in the plastic part and push it all the way in.

PASO 9 Pulley Assembly




- Hook the Idler Pulley by the belt on the inside of the printer.

  ⚠ Make sure the belt is straight and not twisted!

- Attach the Belt-tensioner-pulley plastic part onto the pulley itself.

  ⚠ Make sure the part with the nut is pointing towards the center of the printer!!

- Align both parts and fix them together using the M3x18 screw.

  - Tighten the screw.

  ⓘ There should be either the "R" or "L" marking visible on top, depending on the side you are working on.

PASO 10 Tensioning Bolt Lubrication

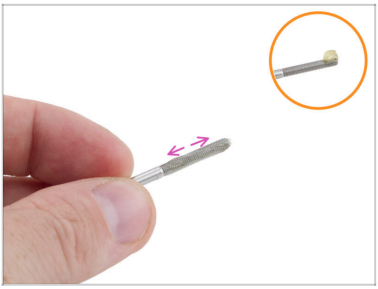

- Before re-installing the M3x30 **belt tensioning bolt**, it should be lubricated to ensure smooth belt adjustment and to prevent the tensioner from seizing.
  - Apply a small amount of Prusa lubricant to the tip of the M3x30 screw.
  - Extiende el lubricante uniformemente por toda la rosca.

PASO 11 Tensioner Installation

- Push the assembly into the belt-tensioner plastic part in the printer.
  - The opening with the nut on the pulley assembly must align with the tensioning bolt.
- Tighten the M3x30 tensioning bolt to fix the assembly in place.

Do not tighten the screw fully yet.

PASO 12 Belt Tensioning

- Conecta la impresora a la corriente.
- Enciende la impresora mediante el interruptor situado en la parte posterior.
- Visit the Adjusting belt tension article and tighten both the belts to the correct tension.

PASO 13 Finish

- To finish the repair, we recommend to visit the menu ***Control -> Calibrations & Tests***

  and run the Selftest.
- Congratulations. Your printer is ready for use again.

Notes:

Notes:

Notes:

Notes: